
TestEquipmentDepot.com

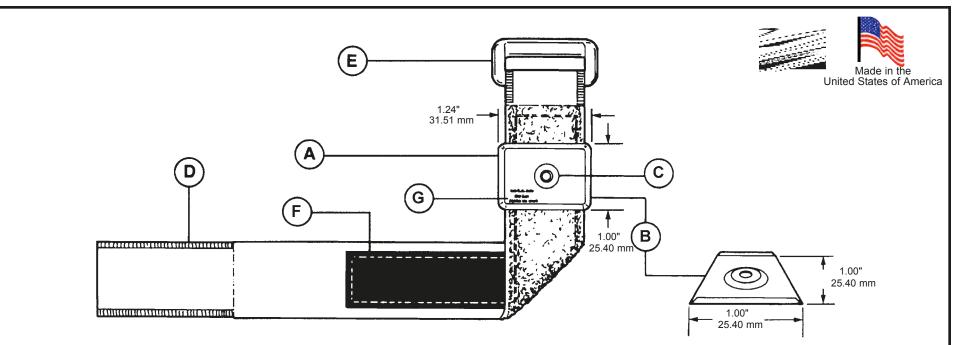


- A. Cap ABS plastic, black
- B. 300 Series stainless steel back plate is .021" thick. Provides 1.0 sq. in. of skin contact surface.
- C. 4mm snap stud machined from 300 series stainless steel. Fits to 4mm spring loaded medical type socket. Coil cord disengages from snap with 1-5 lbs. of perpendicular force. Durable, providing long life well beyond that of sheet metal snaps.
- D. Nylon, hook fastener is royal blue, 25mm (1.0") wide. 25mm (1.0") nylon royal blue loop fastener material. Functional band circumference 6.50" min. and 10.75" max. assumes all but .50" of hook material is trimmed off to avoid overlapping. No exposed conductive surfaces when worn.
- E. Return loop for quick and easy adjustment.
- F. Sewn in non-reactive, anti-microbial, anti-bacterial medical grade conductive strip common with stainless plate adds 4 sq. in. of skin surface area contact.
- G. Desco, Item # and Made in USA are molded into cap.

Meets or exceeds requirements ANSI/ESD S1.1 and ESD TR53.

Unless otherwise noted, tolerance is ± 10%

	WRISTBAND, HOOK AND LOOP, ADJUSTABLE		
DESCO		DRAWING NUMBER 09060	DATE: December 2011



© 2011 DESCO NDUSTRIES NC. Employee Owned