



Meets ANSI/ESD S20.20 and Grounding standard ANSI/ESD S6.1

- A. 10mm (.395") snap socket (female) to ground work surface.
- B. Molded in black thermoplastic elastomer.
- C. Ring terminal, .200" ID, (#10).
- D. Extra ring terminal included for customizing length.
- E. The [09821](#) has a 1 megohm resistor between the snap and ground, with banana jacks at ground potential.
- F. The [09820](#) has no resistor between snap and ground, with banana jacks also at ground potential.
- G. Wire is autosplice crimped to secure it inside of the mold.
- H. High flex strand copper, 20 gauge, with PVC insulated jacket
[09821](#) - black insulation
[09820](#) - green insulation with yellow stripe
 OD = .100"
- I. Dual banana jacks at ground potential (.162" - .164" ± .002" ID).
- J. Desco and ground symbol molded into the plastic.
- K. Date coded to show month and year of manufacture. Arrow points to month of manufacture (12:00 = December), numerals indicate the year (03=2003).

Worksurface and two Wrist Straps can connect to Common Point Ground

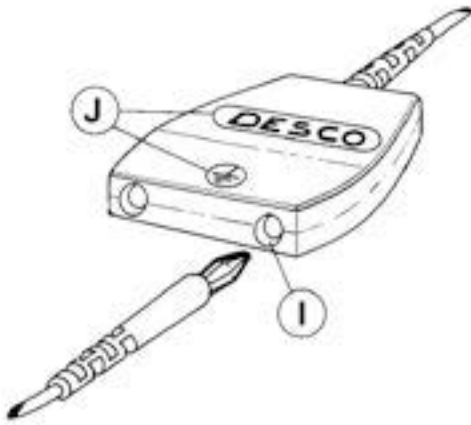

| ITEM | LENGTH | CORD COLOR | RESISTOR |
|-----------------------|--------|--------------------------|----------|
| 09820 | 10' | Green with Yellow Stripe | None |
| 09821 | 10' | Black | 1 Megohm |

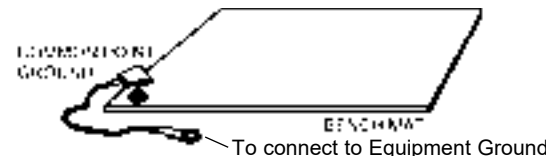

Made in the United States of America

Specifications and procedures subject to change without notice.

COMMON POINT GROUND, WITH SNAP SOCKET (FEMALE), 10FT

DESCO

DRAWING NUMBER
09820

DATE:
November 2018