


BICONICAL ANTENNAS

BICOLOG[®]

SERIES

Broadband transmission and reception from 20 MHz to 3 GHz – Mobile and Stationary Use

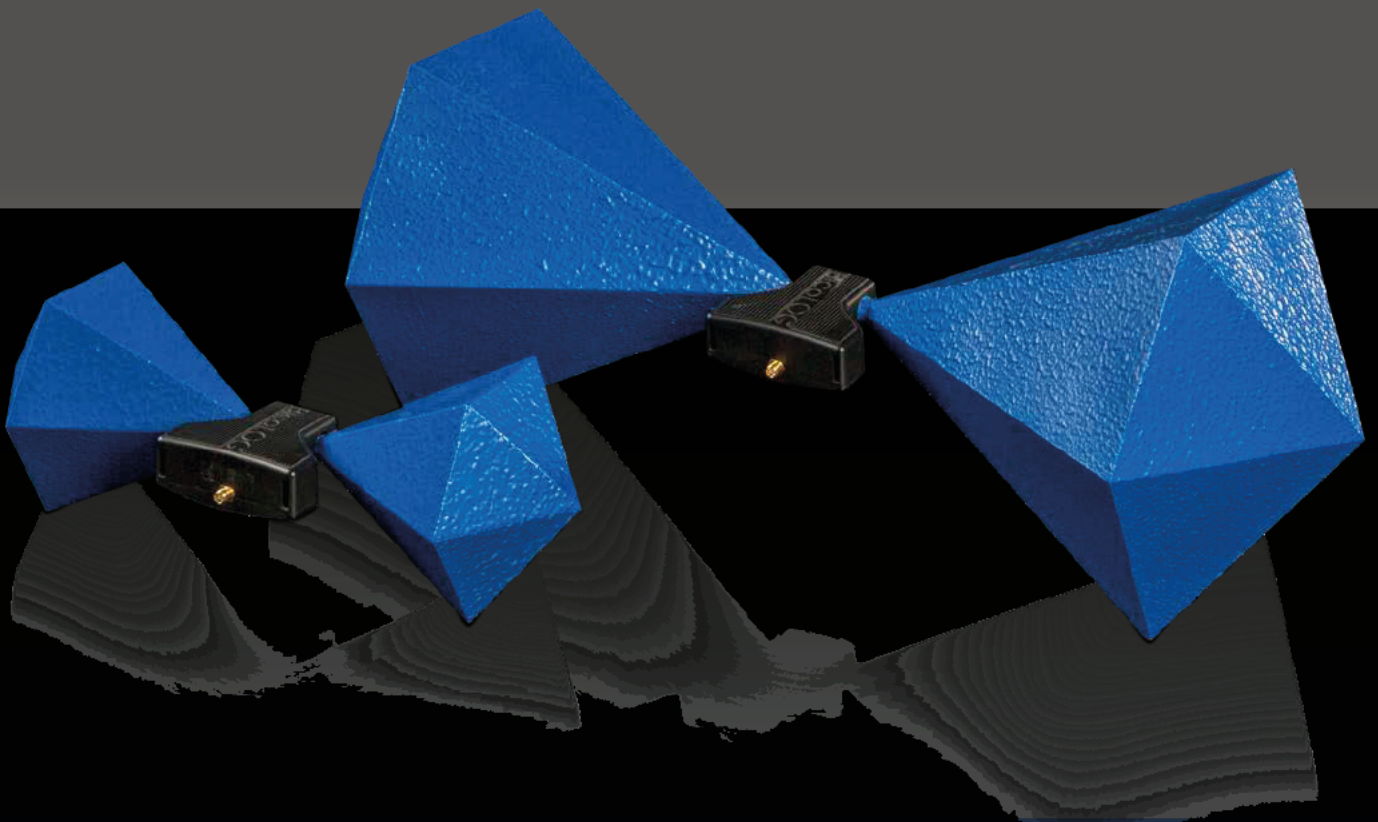

Highlights:

- One broadband antenna for the entire frequency range (20 MHz – 3 GHz)
- Ideal in combination with spectrum analyzers
- Lightweight and small in size
- 10 years warranty




MADE IN GERMANY

Specifications


BicoLOG® 5070

| | | | |
|-------------------------|--------------------|--------------------|-----------------------------|
| Dimensions [L x W x D] | 350 x 160 x 140 mm | Nominal Impedance | 50 Ohm |
| Weight | 350 g | Calibration Points | 70 (5 MHz and 10 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 50 MHz – 700 MHz | Tripod Socket | 1/4" |
| Gain | -29 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 20 – 33 dB/m |

Gain Diagram BicoLOG 5070

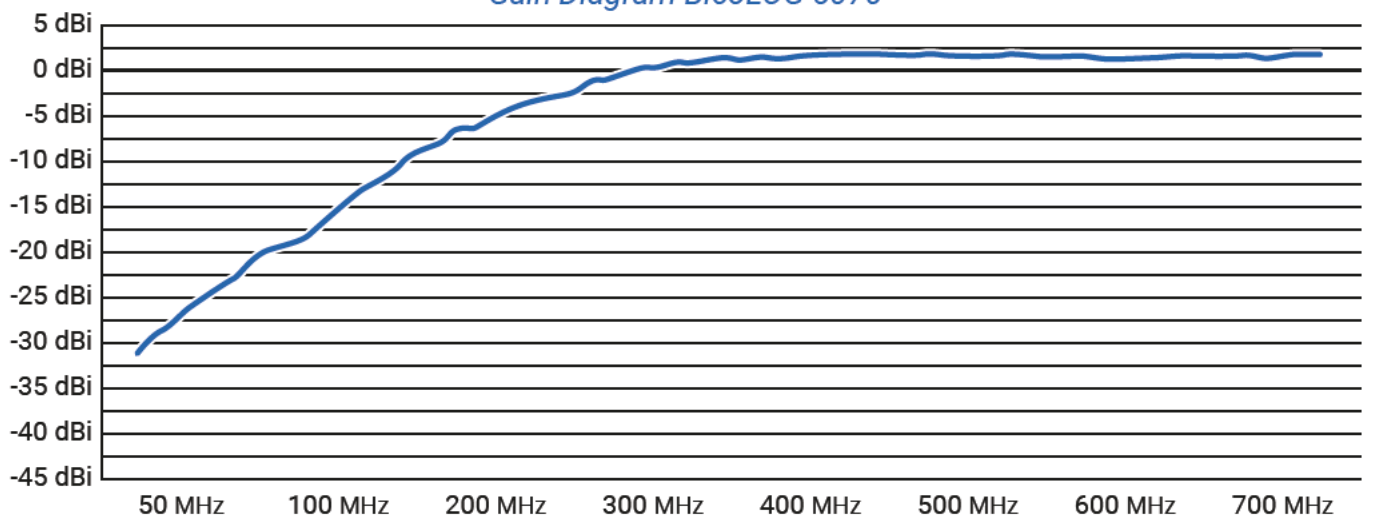

Antenna Factor Diagram BicoLOG 5070

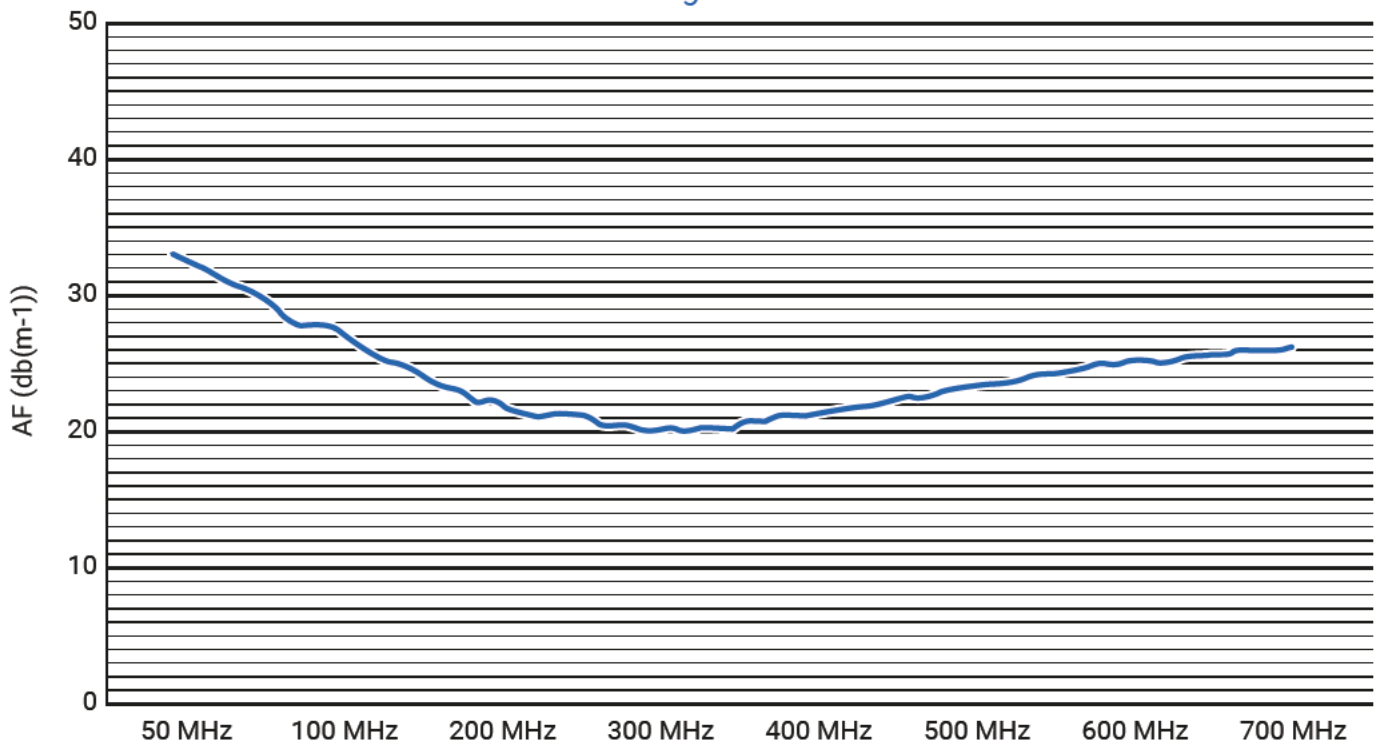


Specifications


BicoLOG® 30100

| | | | |
|-------------------------|--------------------|--------------------|------------------------------|
| Dimensions [L x W x D] | 350 x 160 x 140 mm | Nominal Impedance | 50 Ohm |
| Weight | 350 g | Calibration Points | 104 (5 MHz and 10 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 30 MHz – 1 GHz | Tripod Socket | 1/4" |
| Gain | -39 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 20 – 41 dB/m |

Gain Diagram BicoLOG 30100

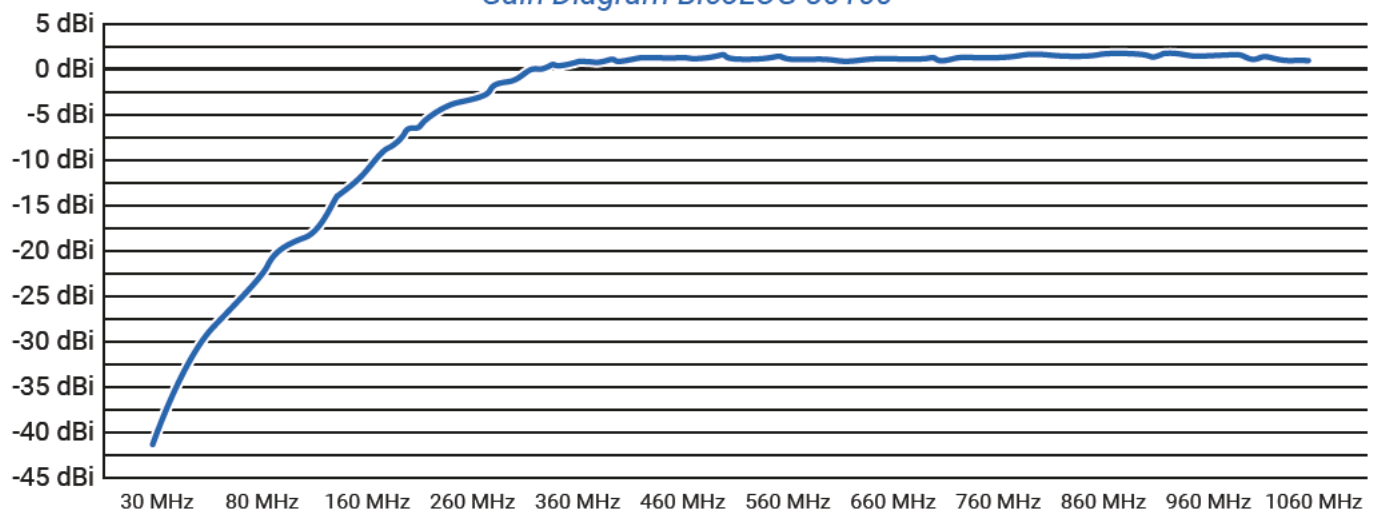

Antenna Factor Diagram BicoLOG 30100

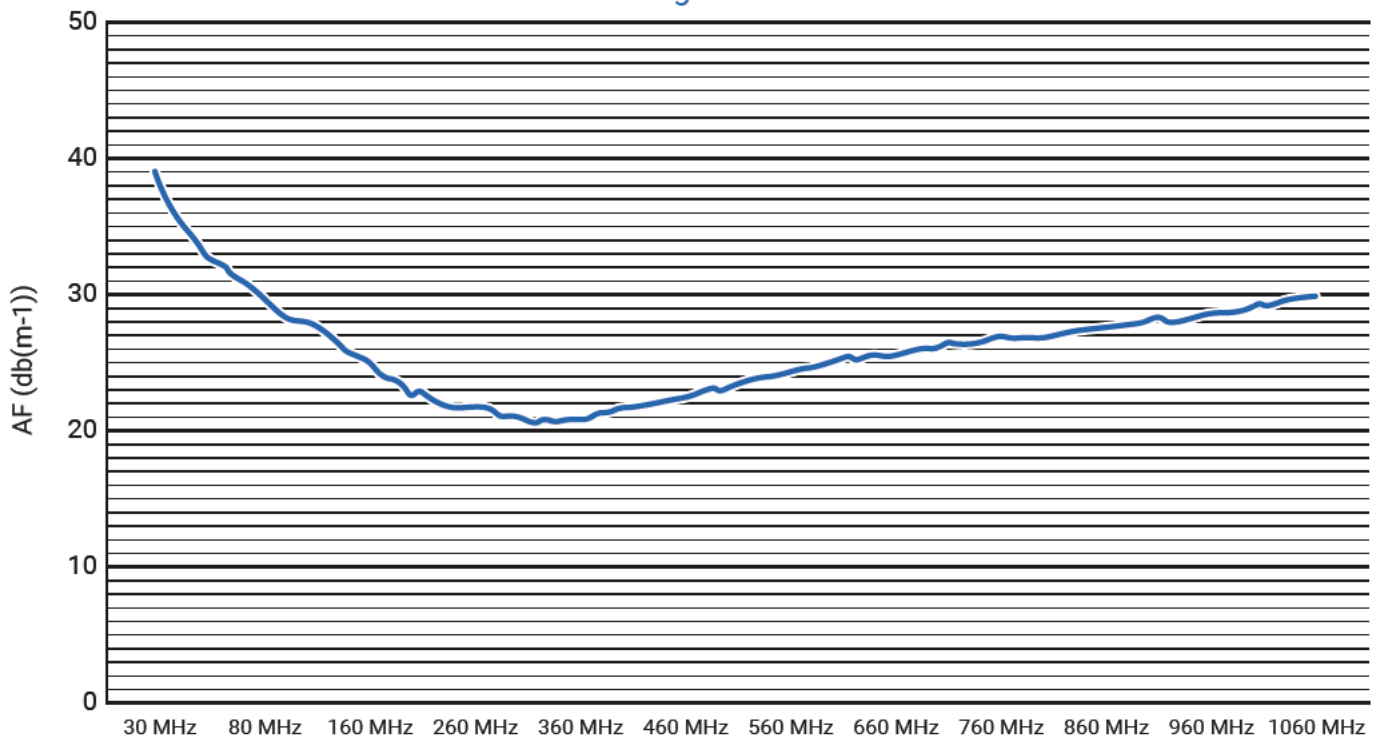


Specifications


BicoLOG® 30100 E

| | | | |
|-------------------------|--------------------|--------------------|---------------------------|
| Dimensions [L x W x D] | 540 x 225 x 225 mm | Nominal Impedance | 50 Ohm |
| Weight | 1150 g | Calibration Points | 194 (5 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 30 MHz – 1 GHz | Tripod Socket | 1/4" |
| Gain | -31 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 17 – 31 dB/m |

Gain Diagram BicoLOG 30100 E

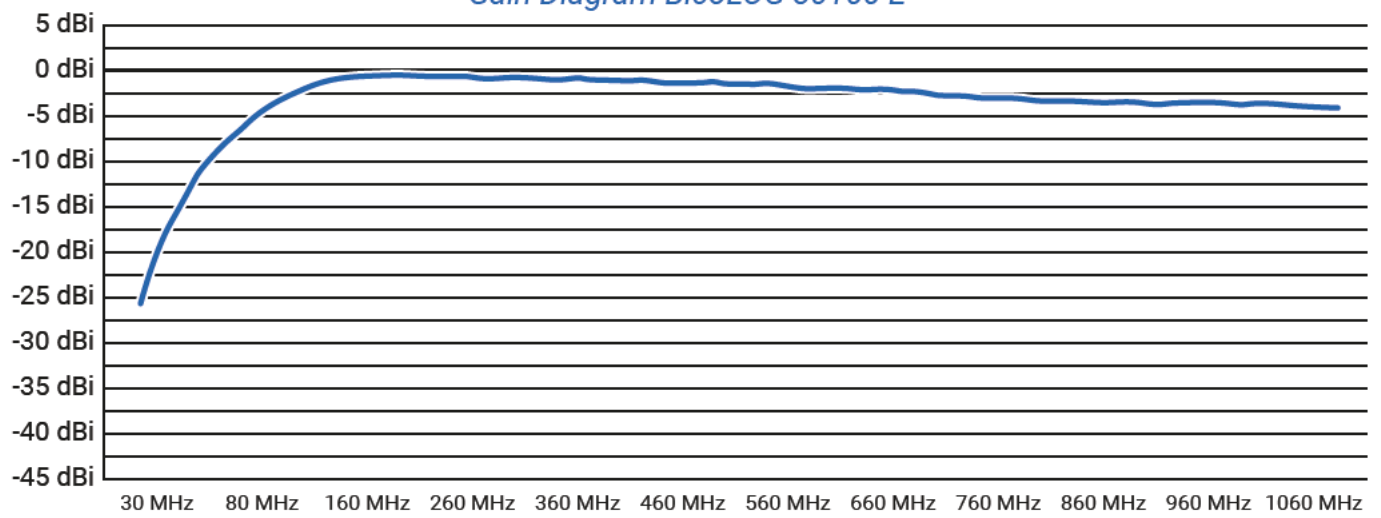

Antenna Factor Diagram BicoLOG 30100 E

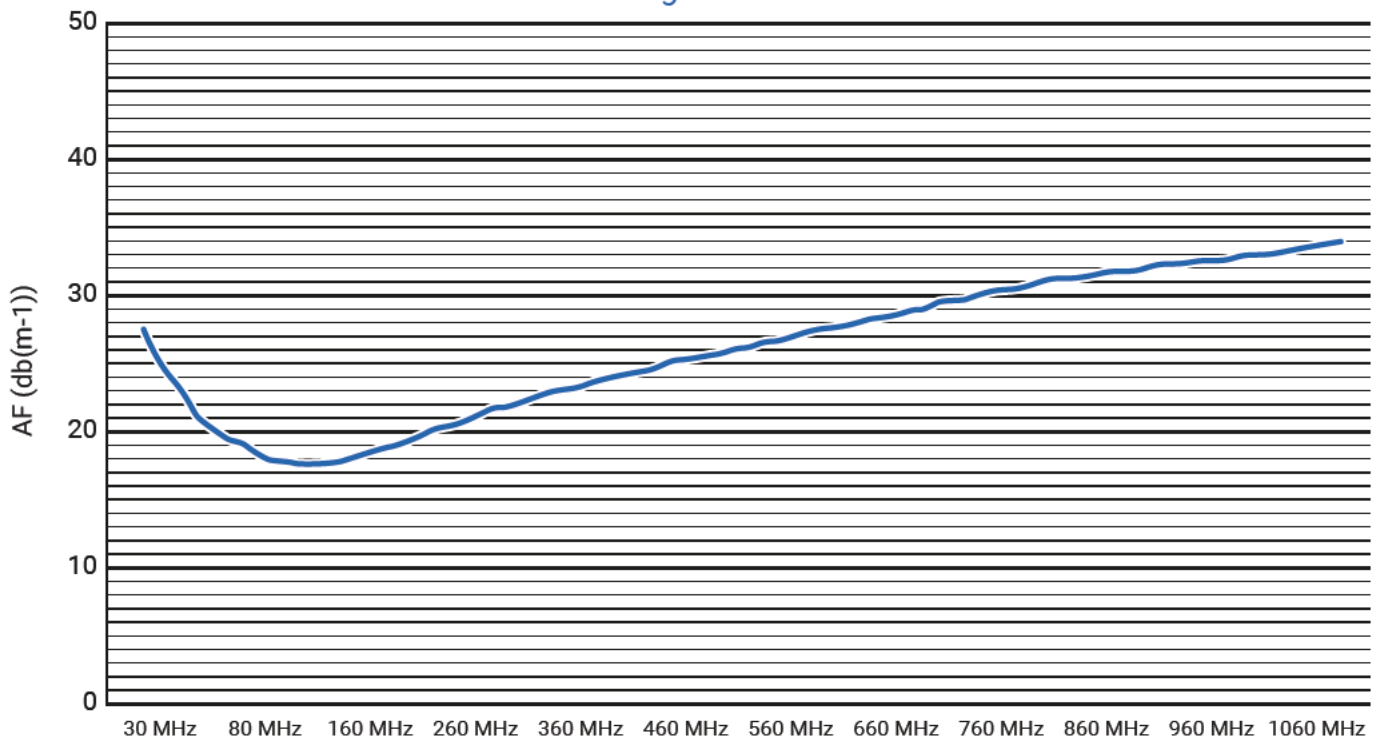


Specifications


BicoLOG® 20100

| | | | |
|-------------------------|--------------------|--------------------|------------------------------|
| Dimensions [L x W x D] | 350 x 160 x 140 mm | Nominal Impedance | 50 Ohm |
| Weight | 350 g | Calibration Points | 106 (5 MHz and 10 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 20 MHz – 1 GHz | Tripod Socket | 1/4" |
| Gain | -45 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 20 – 42 dB/m |

Gain Diagram BicoLOG 20100

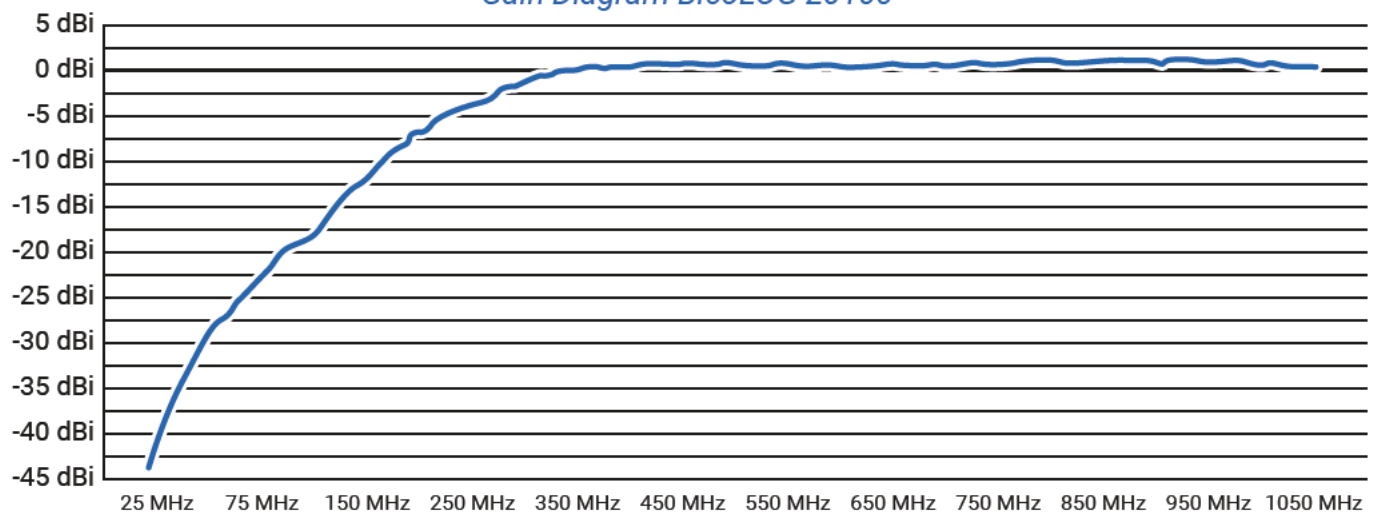

Antenna Factor Diagram BicoLOG 20100

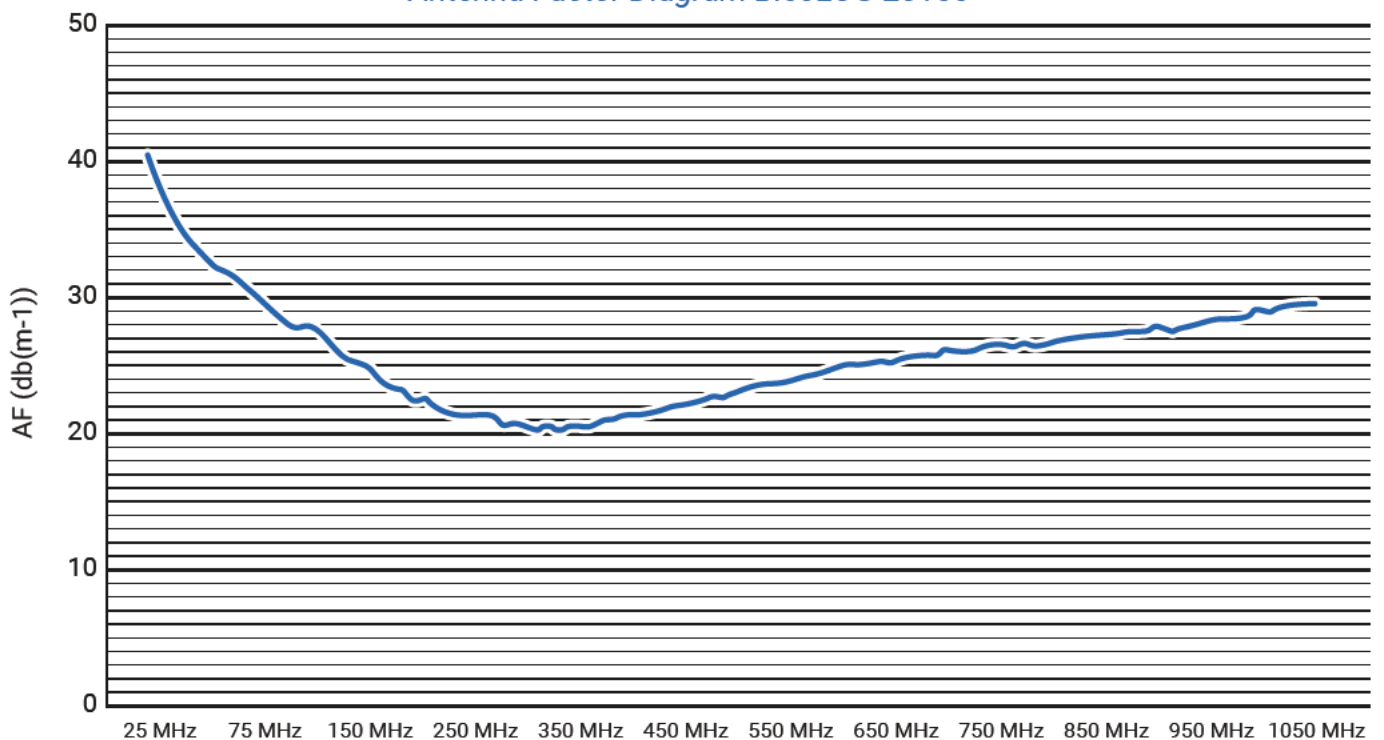


Specifications


BicoLOG® 20100 E

| | | | |
|-------------------------|--------------------|--------------------|---------------------------|
| Dimensions [L x W x D] | 540 x 225 x 225 mm | Nominal Impedance | 50 Ohm |
| Weight | 1150 g | Calibration Points | 196 (5 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 20 MHz – 1 GHz | Tripod Socket | 1/4" |
| Gain | -38 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 17 – 34 dB/m |

Gain Diagram BicoLOG 20100 E

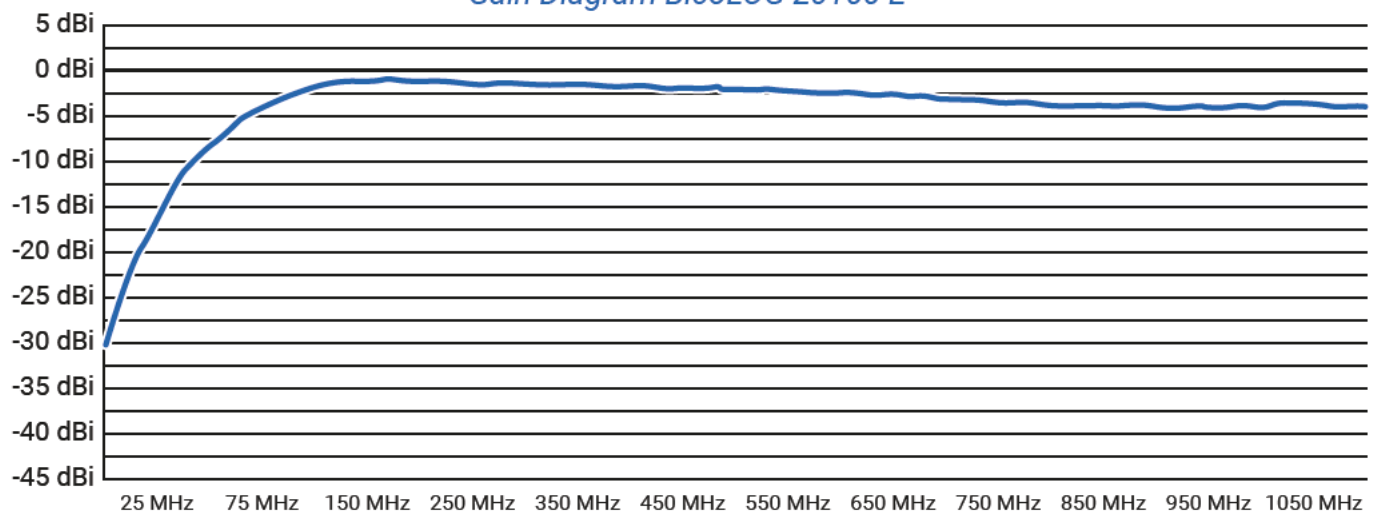

Antenna Factor Diagram BicoLOG 20100 E

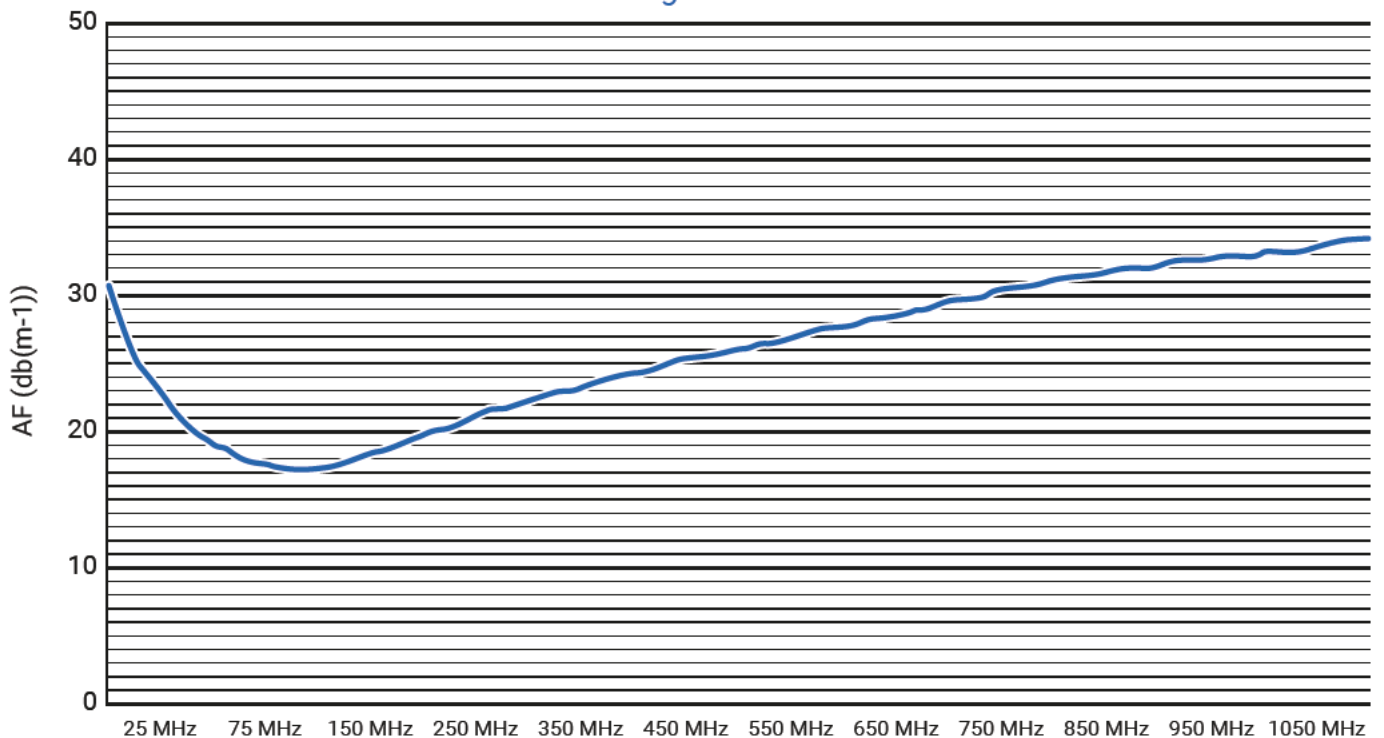


Specifications


BicoLOG® 20300

| | | | |
|-------------------------|--------------------|--------------------|------------------------------|
| Dimensions [L x W x D] | 350 x 160 x 140 mm | Nominal Impedance | 50 Ohm |
| Weight | 350 g | Calibration Points | 296 (5 MHz and 10 MHz steps) |
| Design | Biconical | RF Connection | SMA (f) or N with adapter |
| Frequency Range | 20 MHz – 3 GHz | Tripod Socket | 1/4" |
| Gain | -45 dBi – 1 dBi | Warranty | 10 years |
| Max. Transmission Power | 5 W AM (100 MHz) | Antenna Factor | 20 – 51 dB/m |

Gain Diagram BicoLOG 20300

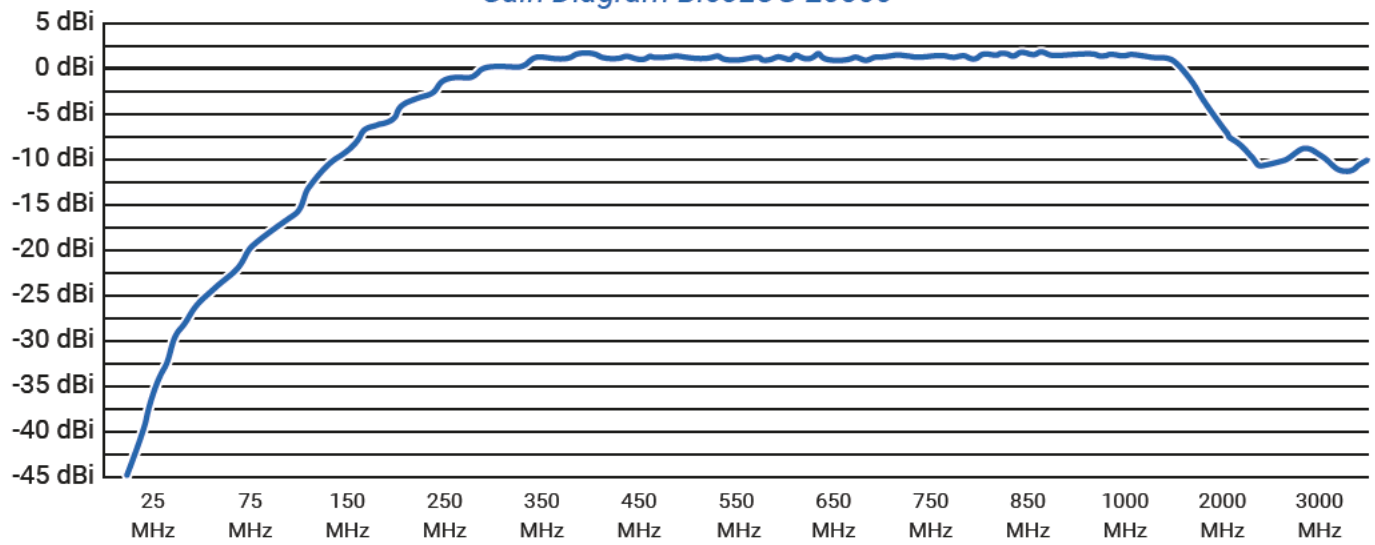

Antenna Factor Diagram BicoLOG 20300

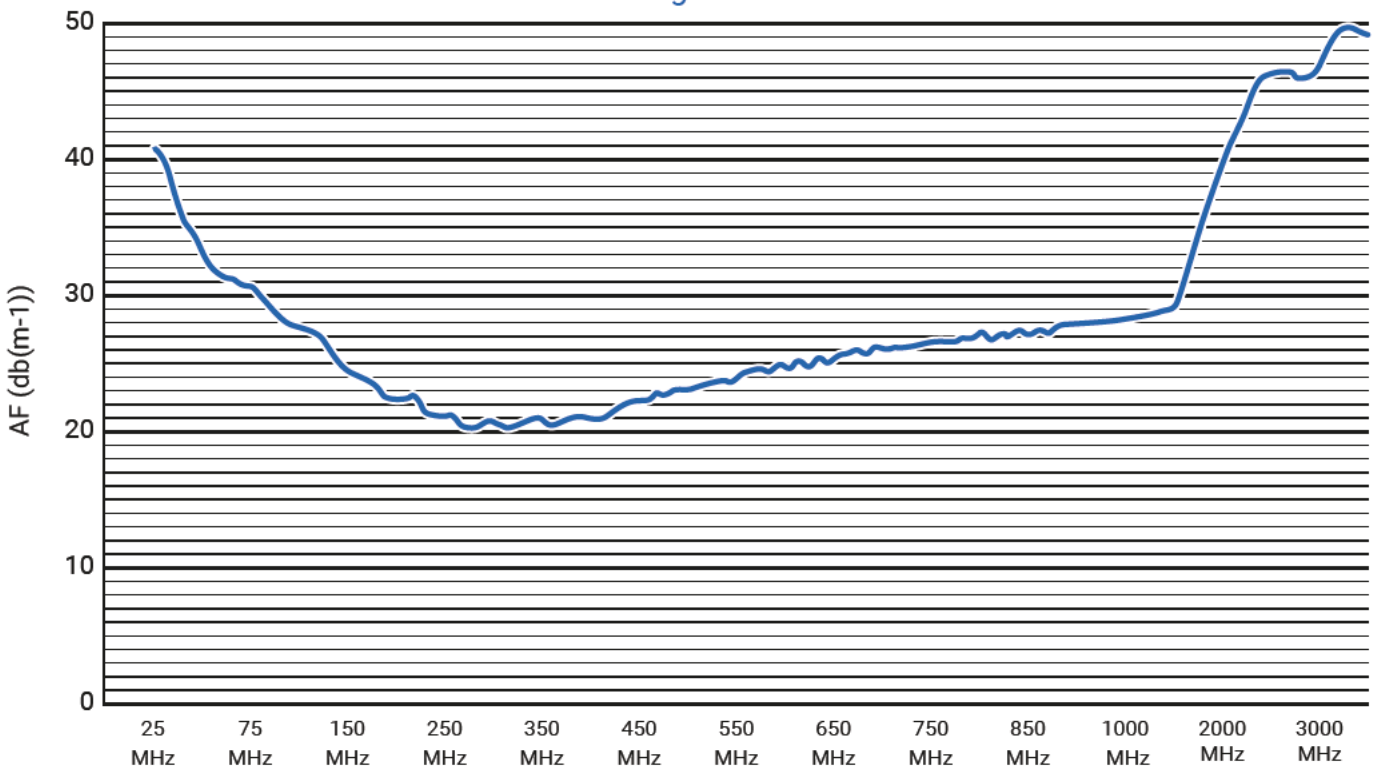

Recommended Accessories



Multifunctional Pistol Grip

(strongly recommended)

Highly recommended for our BicoLOG® antennas. Quick and easy antenna polarization change, guarantees perfectly stable antenna handling.

Order/Art.-No.: 282

1 m / 5 m / 10 m SMA Cable

High-quality special SMA cable, connecting test equipment to any BicoLOG® antenna. Customers can choose between three different cables:

- 1 m standard SMA cable (RG316U)
 - 5 m low-loss SMA cable (especially low damping)
 - 10 m low-loss SMA cable (especially low damping)
- All versions: SMA plug (male) / SMA plug (male)

Order/Art.-No.: 771 (1 m), 772 (5 m), 773 (10 m)



SMA to N Adapter

This special high-quality adapter allows for operating all BicoLOG® antennas with any standard spectrum analyzer equipped with an N connector. This adapter can be used with very high frequencies. Measuring just 30 x 20 mm in size, its nominal impedance is 50 Ohm. Layout: SMA socket (female) / N plug (male).

Order/Art.-No.: 770




Miniature Pistol-Grip Tripod

Detachable handle with super-practical miniature tripod mode. The handle can be attached to the back of the unit, and allows for optimal handling and a fixed stand. Strongly recommended for PC use.

Order/Art.-No.: 280



Frequency Overviews

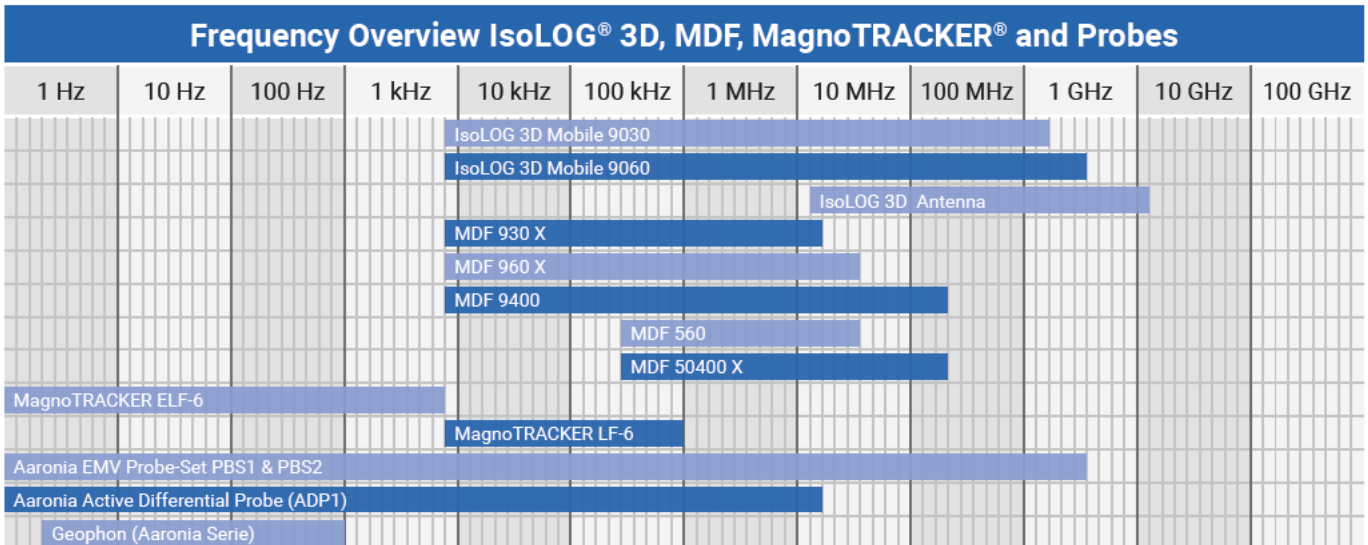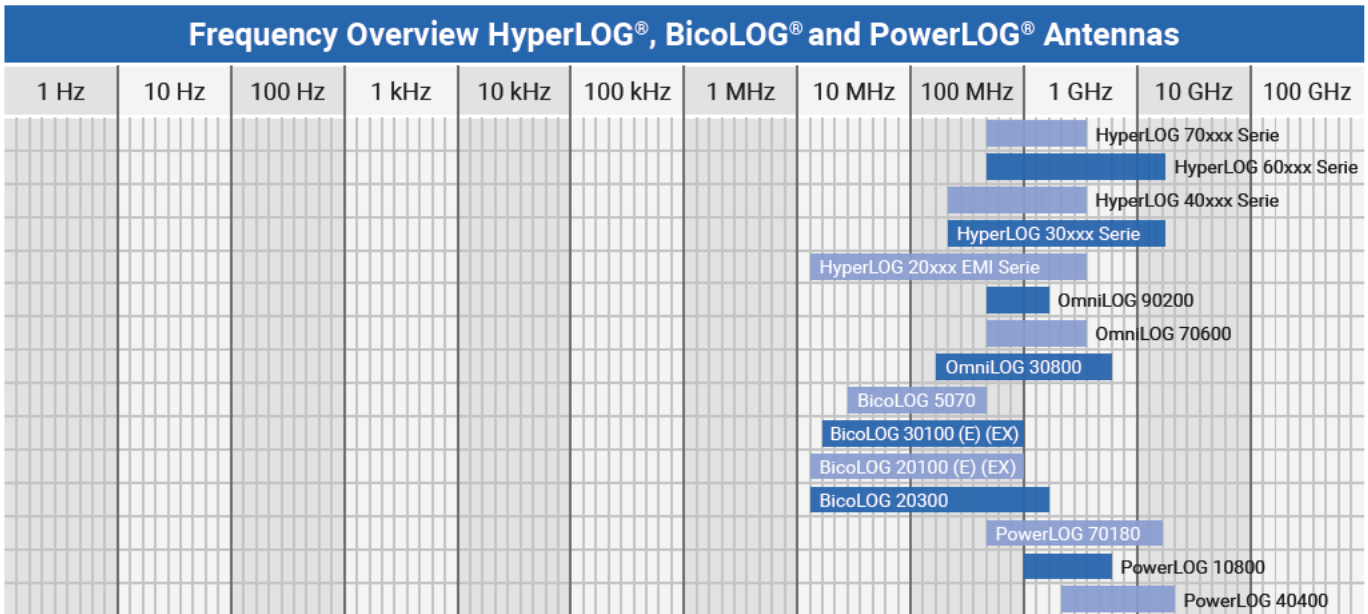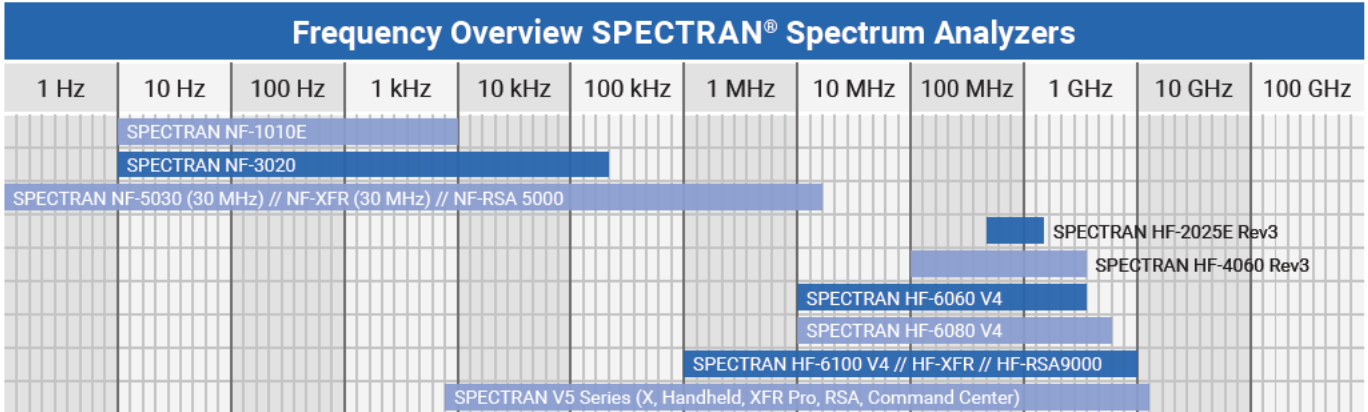

REFERENCES



Selected List of Aaronia Clients

Government, Military, Aero- and Astronautic

- NATO, Belgium
- Department of Defense (DoD), USA
- Department of Defence, Australia
- Airbus, Germany
- Boeing, USA
- German Armed Forces, Germany
- NASA, USA
- Lockheed Martin, USA
- Lufthansa, Germany
- German Aerospace Center (DLR), Germany
- Eurocontrol, Belgium
- EADS, Germany
- Drug Enforcement Administration (DEA), USA
- Federal Bureau of Investigation (FBI), USA
- Federal Criminal Police Office (BKA), Germany
- Federal Police, Germany
- Ministry of Defence, Netherlands

Research/Development, Science and Universities

- MIT - Physics Department, USA
- California State University, USA
- Indonesian Institute of Science (LIPI), Indonesia
- Los Alamos National Laboratory (LANL), USA
- University of Bahrain, Bahrain
- University of Florida, USA
- University of Victoria, Canada
- University of Newcastle, United Kingdom
- University of Durham, United Kingdom
- University Strasbourg, France
- University of Sydney, Australia
- University of Athen, Greece
- University of Munich, Germany
- Technical University of Hamburg, Germany
- Max-Planck Inst. for Radio Astronomy, Germany
- Max-Planck Inst. for Nuclear Physics, Germany
- Research Centre Karlsruhe, Germany

Industry

- IBM, Switzerland
- Intel, Germany
- Shell Oil Company, USA
- ATI, USA
- Microsoft, USA
- Motorola, Brazil
- Audi, Germany
- BMW, Germany
- Daimler, Germany
- Volkswagen, Germany
- BASF, Germany
- Siemens AG, Germany
- Rohde & Schwarz, Germany
- Infineon, Austria
- Philips, Germany
- ThyssenKrupp, Germany
- EnBW (Energie Baden-Württemberg), Germany
- CNN, USA
- Duracell, USA
- German Telekom, Germany
- Bank of Canada, Canada
- NBC News, USA
- Sony, Germany
- Anritsu, Germany
- Hewlett-Packard, Germany
- Bosch, Germany
- Mercedes-Benz, Austria
- Osram, Germany
- DEKRA, Germany
- AMD, Germany
- Keysight, China
- Infineon Technologies, Germany
- Philips Semiconductors, Germany
- Hyundai Europe, Germany
- VIAVI, Korea
- Wilkinson Sword, Germany
- IBM Deutschland, Germany
- Nokia-Siemens Networks, Germany

