

17518 COALESCING FILTER KIT



Installation Instructions



CAUTION: To prevent personal injury and/or equipment damage,




- Wear personal protective equipment that meets ANSI/ISEA and OSHA standards.
- Use only the Parker 15F22EA filter supplied in this kit. All performance tests and claims are based on using this specific filter.

Replacing Existing Parker Coalescing Filter

If your machine has a Parker 15F22EA filter installed:

- Replace the existing Parker coalescing filter with the Parker 15F22EA filter supplied in the kit (**Figure 1**).
- Disregard the 3/8" x 2" pipe union supplied in the kit and use the existing pipe fittings on your machine.

Figure 1

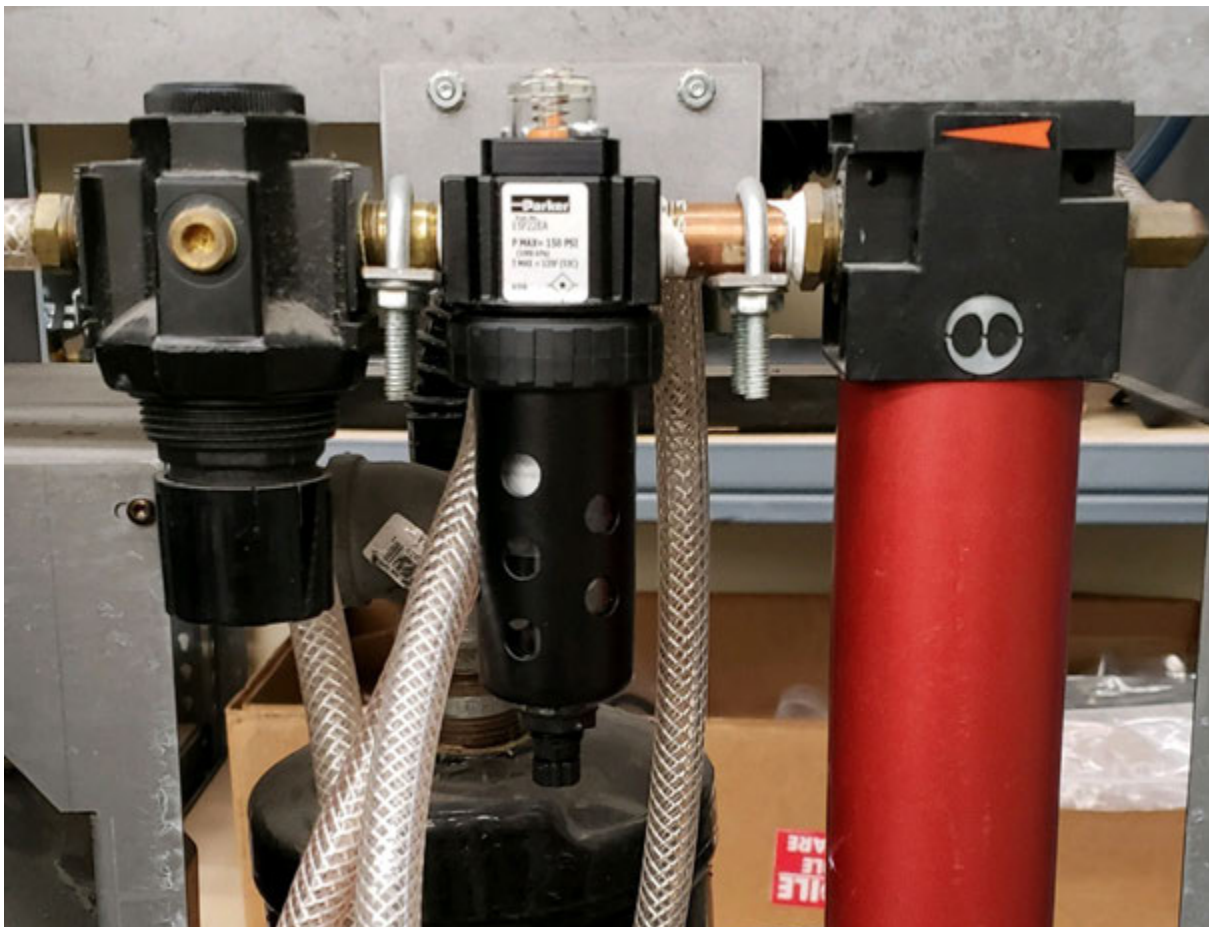

Continued on back page...

Replacing Discontinued Ingersoll Rand Filter

If your machine has a discontinued Ingersoll Rand F25231-310 filter installed:

- Replace the discontinued Ingersoll Rand F25231-310 filter (**Figure 2**) with the Parker 15F22EA supplied in the kit.
- Replace one of the two 3/8" x 1.5" pipe unions from the existing configuration with the 3/8" x 2" pipe union supplied in the kit (**Figure 3**). This longer pipe union accounts for the 1/2" smaller width of the new Parker 15F22EA filter.

Figure 2



Figure 3



Because of ongoing product improvements, we reserve the right to change design, specifications, and materials without notice.