
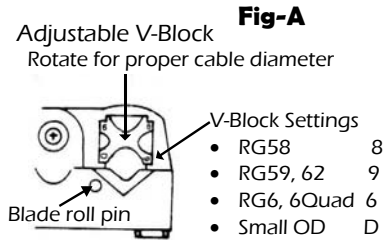
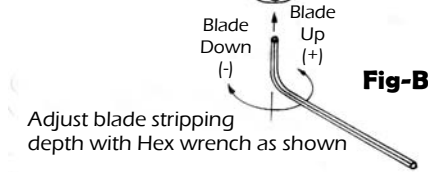
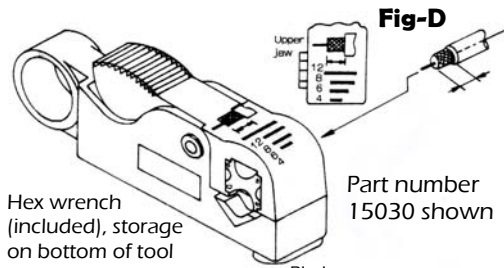



## INSTRUCTION SHEET COAX CABLE STRIPPING TOOL P/N 15030, 15031, 15032



Replacement Blades  
for 2 Level Strippers  
Order P/N 15038  
Package of 4 Blades



**Fig-C**



**Stripping Dimensions**

	BC	BD*	BE	AE
mm	4	6	8	12
inch	.157	.236	.315	.472

\*Factory pre-set @ .236"





## INSTRUCTION SHEET COAXIAL CABLE STRIPPING TOOL 15030 and all other 2 level strippers

## E-Series Strippers 2 level

### INSTRUCTIONS FOR USE

Use caution blades are sharp!!

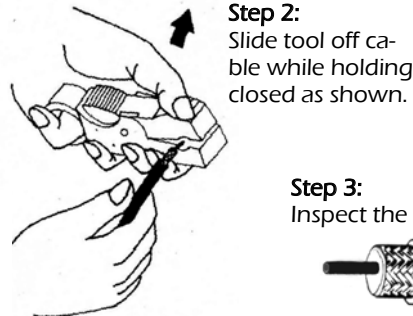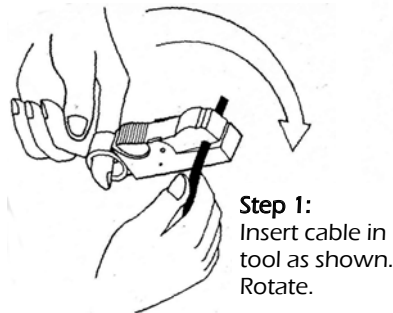

**Step 3:**  
Inspect the strip.



### ADJUSTING TOOL

Factory pre-set for .236" (6 mm) strip length

1. Set V-Block to proper cable type (see Fig-A) by sliding V-Block out of housing. Rotate to proper setting and re-insert.
2. Adjust the blade stripping depth with the hex wrench as shown in Fig B. The Hex wrench is stored in the bottom of the tool.
3. Stripping distance (see Fig D) or length of the exposed shield & dielectric can be adjusted. Push out the blade roll pin (see Fig A) with the hex wrench. Use tweezers (not supplied) to reposition the blade to the proper slot in bottom jaw housing as shown in Fig C.

IS15030B.pub © 2003 Platinum Tools, Inc.

IS 15030 B1 One Up.pub Date: 8.14.2003



99 Washington Street  
Melrose, MA 02176  
Phone 781-665-1400  
Toll Free 1-800-517-8431

Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)