

# AFG-4000 Series

## Arbitrary Function Generator

### FEATURES

- Provide Single-channel or Dual-channel Output  
Single Channel : AFG-4125E/4125AE(25MHz)  
Dual Channel : AFG-4225E/4235/4260/4280/4210H/4225H(25/35/60/80/100/250MHz)
- Built-in Sine, Square, Triangle, Ramp, Pulse, Noise, Harmonic Wave, Arbitrary Wave
- Min. Resolution : 1 $\mu$ Hz
- Sampling Rate : AFG-4225H : 1.25GSa/s; AFG-4235/4260/4280/4210H : 500MSa/s;  
AFG-4125E/4125AE/4225E : 125MSa/s
- Amplitude Resolution : AFG-4125E/4125AE/4225E : 14bits;  
AFG-4235/4260/4280/4210H/4225H : 16bits
- Memory Length : AFG-4225E/4235/4260/4280/4210H/4225H : 10M/per channel;  
AFG-4125E/4125AE : 16k/per Channel
- Modulation : AM,DSB-AM,FM,PM,PWM,ASK,PSK,BPSK,QPSK,FSK,FSK,4FSK,OSK,SUM
- Built-in Sweep, Burst, Counter Function
- AFG-4125AE Built-in Power Amplifier Function
- Communication Interface : AFG-4235/4260/4280/4210H/4225H Provide USB, LAN Interface  
AFG-4125E/4125AE/4225E Provide USB Interface
- 8" TFT LCD Display, 800 x 480 Resolution
- Multi-Touch Display : AFG-4235/4260/4280/4210H/4225H

# 25MHz~250MHz Frequency Bandwidth Selections to Meet Diverse Signal Generation Needs!

AFG-4000 arbitrary function generator series is GW Instek's first arbitrary function generator series to be equipped with an 8" large touch screen. The frequency bandwidth of the single-channel models is 25MHz, and dual-channel models feature 250MHz/100MHz/80MHz/60MHz/35MHz/25MHz frequency bandwidth selections. The entire series provides high resolution of 10Hz and has built-in standard waveforms such as sine wave, square wave, triangle wave, pulse wave, noise wave, harmonic wave, etc. The highest bandwidth 250MHz model provides 1.25GSa/s sample rate; the mid-range models ranging from 35MHz ~ 100MHz provide 500MSa/s sample rate; and the 25MHz entry-level models have a sampling rate of 125MSa/s. For vertical resolution, the 35MHz ~ 250MHz models feature 16-bit resolution, and 25MHz entry-level models provide 14-bit resolution. In addition, in terms of memory depth, dual channel 25MHz ~ 250MHz models provide 10M memory depth, and entry-level single channel 25MHz models provide arbitrary waveform editing function with 16k memory depth. The entire series has built-in 146 arbitrary waveforms for editing and output.

The dual-channel models provide dual-channel related settings such as frequency coupling, amplitude coupling and tracking, allowing users to quickly set the output related to the two channels. In terms of modulation function, the AFG-4000 series provides AM, DSB-AM, FM, PM, PWM, ASK, PSK, BPSK, QPSK, FSK, 3FSK, 4FSK, OSK, SUM and other modulation signal outputs. Standard functions include Sweep and Burst outputs and the Counter function. AFG-4125AE has a built-in power amplifier. The power output of the amplifier reaches 10W, and the amplification factor reaches 10 times to produce a maximum output of 22V. The independent input/output power amplifier provides a bandwidth range from 5Hz to 100 kHz, which can be used for audio signal and other application requirements.

The AFG-4000 series is equipped with an 8-inch high-resolution TFT LCD, and models above 35MHz are equipped with the touch screen function. The configuration of touch screen makes inputting parameters more convenient. Users only need to touch parameters such as Frequency, Amplitude or DC offset, and a numeric input window will appear on the screen. Users can intuitively input parameters through this window or the numeric keys on the AFG-4000 panel. Through the 8" large screen, touch screen and diverse built-in waveforms, users can control it at will to meet their signal generation needs.



As for the interfaces, the 25MHz models: AFG-4125E/4125AE/ 4225E have a built-in USB Host/Device interfaces, and the models with higher bandwidths ranging from 35MHz to 250MHz come standard with USB Host/Device and LAN interfaces.

## SELECTION GUIDE

| Model                   | AFG-4125E         | AFG-4125AE* | AFG-4225E | AFG-4235               | AFG-4260 | AFG-4280 | AFG-4210H | AFG-4225H |
|-------------------------|-------------------|-------------|-----------|------------------------|----------|----------|-----------|-----------|
| No. of Channel          | Single            |             | Dual      |                        |          |          |           |           |
| Frequency Range (Sine)  | 25MHz             |             | 25MHz     | 35MHz                  | 60MHz    | 80MHz    | 100MHz    | 250MHz    |
| Sample Rate (Sa/s)      | 125M              |             |           | 500M                   |          |          |           | 1.25G     |
| Amplitude Resolution    | 14 bits           |             |           | 16 bits                |          |          |           |           |
| Memory Length           | 16k/CH            |             | 10M/CH    |                        |          |          |           |           |
| Touch Panel             | N/A               |             |           | Yes                    |          |          |           |           |
| Communication Interface | USB(Host, Device) |             |           | USB(Host, Device), LAN |          |          |           |           |

\*AFG-4125AE built-in power amplifier function

### A. 8" TOUCH SCREEN DISPLAY

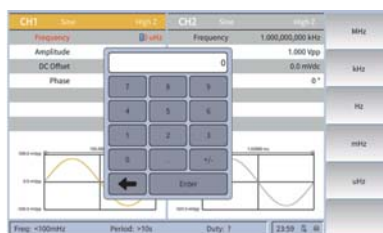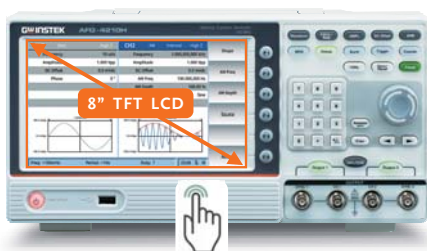

The AFG-4000 series is equipped with an 8-inch high-resolution TFT LCD, and models above 35MHz are equipped with the touch screen function. The configuration of touch screen makes inputting parameters more convenient. Users only need to touch parameters such as Frequency, Amplitude or DC offset, and a numeric input window will appear on the screen. They can intuitively enter setting parameters through this window or the numeric keys on the AFG-4000.

## B. WIDE FREQUENCY SELECTION


| Channel | Model       | Display                 | Main Output |
|---------|-------------|-------------------------|-------------|
| Dual-CH | AFG-2225    | 3.5" TFT LCD            | 25MHz       |
|         | AFG-4225E   | 8" TFT LCD              | 25MHz       |
|         | MFG-2230M   | 4.3" TFT LCD            | 30MHz       |
|         | AFG-4235    | 8" TFT LCD Touch Screen | 35MHz       |
|         | AFG-4260    | 8" TFT LCD Touch Screen | 60MHz       |
|         | MFG-2260M   | 4.3" TFT LCD            | 60MHz       |
|         | MFG-2260MFA | 4.3" TFT LCD            | 60MHz       |
|         | MFG-2260MRA | 4.3" TFT LCD            | 60MHz       |
|         | AFG-4280    | 8" TFT LCD Touch Screen | 80MHz       |
|         | AFG-4210H   | 8" TFT LCD Touch Screen | 100MHz      |
|         | MFG-2220HM  | 4.3" TFT LCD            | 200MHz      |
|         | AFG-4225H   | 8" TFT LCD Touch Screen | 250MHz      |

| Channel   | Model      | Display          | Main Output |
|-----------|------------|------------------|-------------|
| Single-CH | AFG-2005   | 3.5" 3-color LCD | 5MHz        |
|           | AFG-2012   | 3.5" 3-color LCD | 12MHz       |
|           | AFG-2025   | 3.5" 3-color LCD | 25MHz       |
|           | AFG-2105   | 3.5" 3-color LCD | 5MHz        |
|           | AFG-2112   | 3.5" 3-color LCD | 12MHz       |
|           | AFG-2125   | 3.5" 3-color LCD | 25MHz       |
|           | MFG-2110   | 4.3" TFT LCD     | 10MHz       |
|           | MFG-2120   | 4.3" TFT LCD     | 20MHz       |
|           | MFG-2120MA | 4.3" TFT LCD     | 20MHz       |
|           | AFG-4125E  | 8" TFT LCD       | 25MHz       |
|           | AFG-4125AE | 8" TFT LCD       | 25MHz       |
|           | MFG-2130M  | 4.3" TFT LCD     | 30MHz       |
|           | MFG-2160MF | 4.3" TFT LCD     | 60MHz       |
|           | MFG-2160MR | 4.3" TFT LCD     | 60MHz       |


The bandwidth range covers from 25MHz to 250MHz. Combined with the original AFG/MFG series, GW Instek signal source selections are rich and

diverse, which can meet users' usage habits and diverse testing needs.

## C. BUILT-IN VARIOUS STANDARD WAVEFORMS

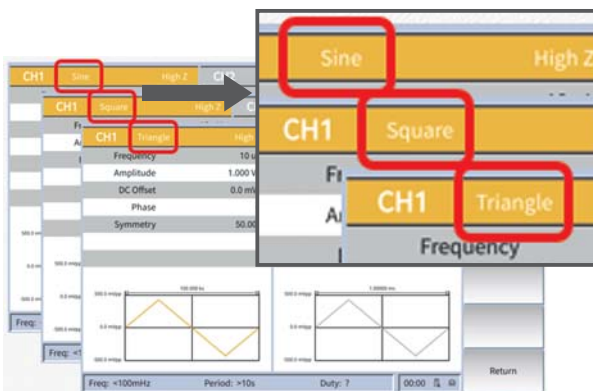


Various standard waveforms are built-in, such as sine wave, square wave, triangle wave, pulse wave, noise wave, harmonics, etc., allowing users to

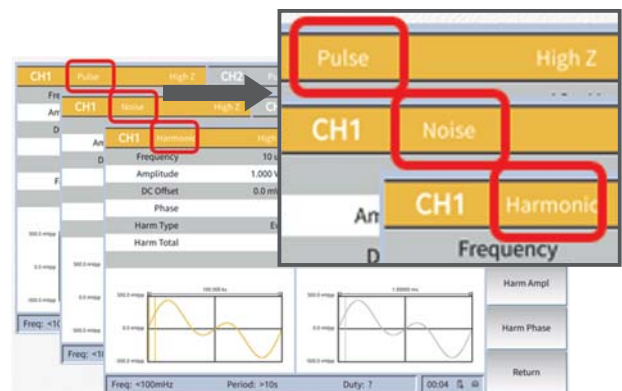

easily select and set to generate the waveforms required for their applications.


## D. HARMONIC SIGNAL GENERATOR

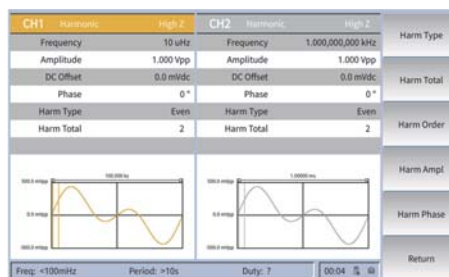

The harmonic signal generator can simulate the harmonic signal of the switching power supply and test the characteristics of the EMI power filter.

Users can set the amplitude and phase of each order signal to achieve the desired signal. AFG-4000 can set and generate up to 16th order harmonics.

## E. RICH BUILT-IN ARBITRARY WAVEFORM SELECTIONS

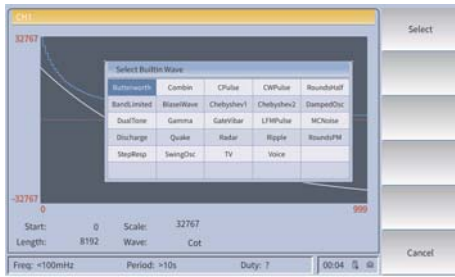


Users can use the built-in 146 application arbitrary waveforms for signal editing and output.


ARB's built-in waveforms include Common, Medical, Standard, or Math and Trigonometric, Window, Engineer, and Segmented Modulation related waveforms.

From the panel, users can select built-in waveforms and edit, save, recall and output arbitrary waveforms..

### COMMON WAVEFORMS INCLUDE DC AND ABSINEHALF WAVEFORMS




DC




ABSinehalf

### MATH WAVEFORMS INCLUDE AIRY AND BESSELJ WAVEFORMS



Airy




Besselj


### ENGINEERING WAVEFORMS INCLUDE TV, VOICE, CWPULSE, SWINGOSC, ROUNDHALF AND OTHER WAVEFORMS




TV




Voice



Cwpulse



SwingOsc



Roundhalf



Bandlimit




Blaseiwave




DepandOSC


## F. BUILT-IN RICH MODULATION WAVEFORMS

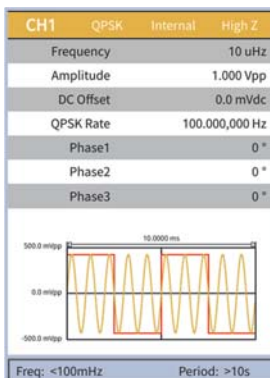


QPSK

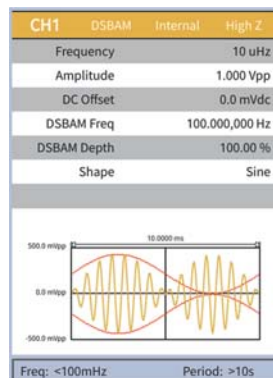

DSBAM

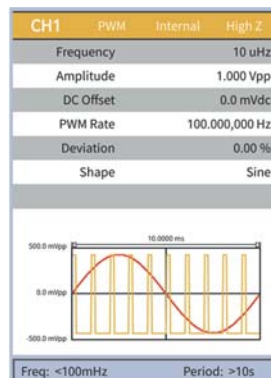

PWM

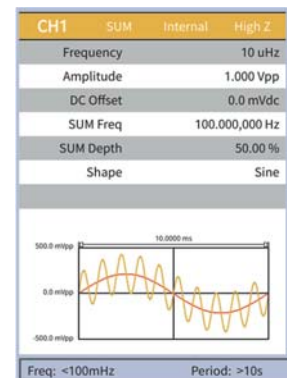


SUM

Provides a wide range of modulation signals, including analog and digital modulation, such as AM, DSB-AM, FM, PM, PWM, ASK, PSK, BPSK, QPSK, FSK, 3FSK, 4FSK, OSK, SUM and other modulation signals.


Suitable for various tests such as fundamental frequency function of communications system, motor control and lighting adjuster, etc.

## G. PROVIDES SWEEP, BURST, COUNTER FUNCTIONS

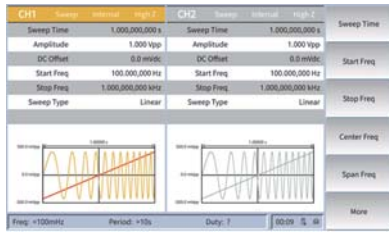

Sweep

Frequency sweeping function can be set to sine wave, square wave, triangle wave and arbitrary wave mode. Linear/logarithmic output can be set to meet various application requirements with different sweeping methods. Frequency sweep can test the frequency response of electronic components such as filters and low-frequency amplifiers, etc.



Burst


Supports N-cycle or Gate mode triggering, and can adjust its duration, operating frequency, waveform polarity and internal or external triggering to achieve discontinuous output related applications.



Counter

Provides 100mHz ~ 200MHz frequency counter function

## H. POWER AMPLIFIER

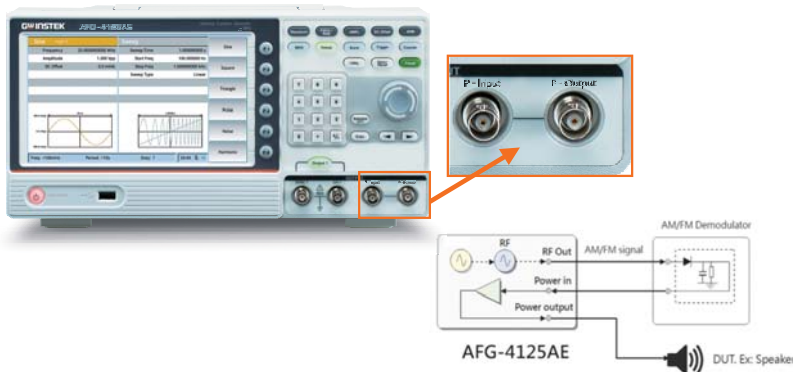

AFG-4125AE features a power amplifier with a built-in amplifier that can independently input/output 10W power and has a gain of 10 times.

This power amplifier has a bandwidth of 5Hz-100kHz and can be used as an audio amplifier; or for a power component characteristic test; for a drive amplifier for piezoelectric components (collocate with an impedance transformer, 10W output).

Users can connect the AFG-4125AE's low-frequency amplifier to a speaker and use it as the driver source for the speaker, which is a common educational application.

## PANEL INTRODUCTION



1. 8" Display
2. Menu Soft Keys
3. Function Keys
4. Numeric Input Keys
5. Selection Knob
6. Arrow Keys
7. Power Button
8. USB Host Port
9. Channel 1 Output Key
10. Sync 1 Output Port
11. Channel 1 Output Port
12. CH1/CH2 Setting Switch Key
13. Channel 2 Output Key
14. Channel 2 Output Port
15. Sync 2 Output Port
16. LAN Port (Available for Models Above 35MHz)
17. USB Device Port
18. Security Lock Hole
19. 10MHz In/Out/Counter Connector
20. Mod/FSK/Trig Connector

\* No.12-15 for dual CH model only.

| SPECIFICATIONS                     |   |            |   |          |   |          |  |           |                    |
|------------------------------------|---|------------|---|----------|---|----------|--|-----------|--------------------|
| Models                             | AFG-4125E   | AFG-4125AE | AFG-4225E   | AFG-4235 | AFG-4260  | AFG-4280 | AFG-4210H  | AFG-4225H |                    |
| Channels                           | 1   |            | 2   |          |   |          |  |           |                    |
| Waveforms                          | Sine, Square, Triangle, Ramp, Pulse, Noise, Harmonic wave, Arbitrary wave                     |            |   |          |   |          |  |           |                    |
| Arbitrary Functions                | Built-in  |            |   |          |   |          |  |           |                    |
| ARB Function                       | Built-in  |            |   |          |   |          |  |           |                    |
| Sample Rate(*1)                    | 125MSa/s  |            | 500MSa/s  |          |   |          | 1.25GSa/s  |           |                    |
| Repetition Rate (Arbitrary Wave)   | 15MHz   |            | 30MHz   |          |   |          |  |           |                    |
| Waveform Length                    | 2 ~ 16K points  |            | 2 ~ 10M points  |          |   |          |  |           |                    |
| Amplitude Resolution               | 14 bits   |            | 16 bits   |          |   |          |  |           |                    |
| Minimum Rise and Fall Time         | < 10 ns   |            | < 8ns   |          |   |          | < 5ns  |           |                    |
| Jitter                             |   |            | 8ns   |          |   |          | 32MB   |           |                    |
| Non-Volatile Memory                |   |            | 8ns   |          |   |          | 32MB   |           |                    |
| User-defined Output Section        | From point 2 ~ 16,384   |            | From point 2 ~ 10,240,000   |          |   |          |  |           |                    |
| User-defined Output Marker Section | From point 2 ~ 16,384   |            | From point 2 ~ 10,240,000   |          |   |          |  |           |                    |
| Output Mode                        | 1 ~ 1,000,000 cycles or infinite mode   |            |   |          |   |          |  |           |                    |
| Frequency Characteristics          |   |            |   |          |   |          |  |           |                    |
| Sine                               | 25MHz   |            | 35MHz   |          | 60MHz   |          | 80MHz  |           | 100MHz             |
| Square                             | 5MHz  |            | 15MHz   |          | 30MHz   |          | 50MHz  |           | 250MHz             |
| Pulse                              | 5MHz  |            | 15MHz   |          | 25MHz   |          | 3MHz   |           | 5MHz               |
| Triangle, Ramp                     | 1MHz  |            | 3MHz  |          | 5MHz  |          | 125MHz   |           | 125MHz             |
| Noise (-3dB)                       | 25MHz BW  |            | 35MHz BW  |          | 60MHz BW  |          | 80MHz BW   |           | 100MHz BW          |
| Harmonic Wave                      | 12.5MHz   |            | 17.5MHz   |          | 30MHz   |          | 40MHz  |           | 50MHz              |
| Resolution                         | 1 μHz or 10 significant figures   |            |   |          |   |          |  |           |                    |
| Accuracy Stability                 | ±2 ppm at 25°C ± 5°C  |            |   |          | ±1 ppm, per 1 year  |          |  |           | ±1 ppm at 0 ~ 40°C |
| Aging                              | ±1 ppm  |            |   |          |   |          |  |           |                    |
| Tolerance                          | ±1 ppm  |            |   |          |   |          |  |           |                    |
| Output Characteristics(*2)         |   |            |   |          |   |          |  |           |                    |
| Output Amplitude                   | Into 50Ω  |            | 1mVpp ~ 10Vpp, for ≤ 25MHz; 1mVpp ~ 5Vpp, for ≤ 60MHz; 1mVpp ~ 2.5Vpp, for ≤ 100MHz             |          |   |          | 1mVpp ~ 10Vpp, for ≤ 40MHz; 1mVpp ~ 5Vpp, for ≤ 80MHz    |           |                    |
| Open-circuit                       |   |            | 2mVpp ~ 20 Vpp, for ≤ 25MHz; 2mVpp ~ 10 Vpp, for ≤ 60MHz; 2mVpp ~ 5 Vpp, for ≤ 100MHz           |          |   |          | 1mVpp ~ 2.5Vpp, for ≤ 120MHz; 1mVpp ~ 1Vpp, for ≤ 250MHz |           |                    |
| Bandwidth Flatness                 |   |            | ≤ 10MHz: ±0.2dB; ≤ 60MHz: ±0.3dB; ≤ 100MHz: ±0.5dB; (relative to 100 kHz Sine wave, 1 Vpp, 50Ω) |          |   |          | 2mVpp ~ 20 Vpp, for ≤ 40MHz; 2mVpp ~ 10 Vpp, for ≤ 80MHz |           |                    |
| Accuracy                           | ± (2% of setting + 1 mVpp)(1kHz sine, 0V offset, >10mVpp)                                     |            |   |          |   |          |  |           |                    |
| Resolution                         | 0.1mVpp or 4 digits (The amplitude ≥ 1Vpp is 1mVpp)   |            |   |          |   |          |  |           |                    |
| Output Impedance                   | 50Ω (Typical)   |            |   |          |   |          |  |           |                    |
| Output protection                  | Short circuit protection, the output will be automatically turned off when overloaded         |            |   |          |   |          |  |           |                    |
| DC Offset                          | Range   |            | ± (10 Vpk - Amplitude Vpp / 2), (High resistance)   |          |   |          | ± (1% of  setting  + 5 mV + amplitude Vpp × 0.5%)        |           |                    |
| Accuracy                           | Accuracy  |            | ± (3% of  setting  + 5 mV + amplitude Vpp × 0.5%)   |          |   |          | ± (1% of  setting  + 5 mV + amplitude Vpp × 0.5%)        |           |                    |
| Resolution                         | Resolution  |            | 0.1 mVpp or 4 digits (The amplitude > 1 Vpp is 1 mVpp)  |          |   |          |  |           |                    |
| Sine Wave Characteristics          |   |            |   |          |   |          |  |           |                    |
| Harmonic Distortion(*3)            | DC-1MHz: <65dBc; 1MHz-10MHz: <60dBc; 10MHz-60MHz: <55dBc; 60MHz-100MHz: <50dBc Typical (0dBm) |            |   |          | DC-1MHz: <65dBc; 1MHz-10MHz: <60dBc; 10MHz-120MHz: <50dBc; 120MHz-250MHz: <45dBc Typical (0dBm) |          |  |           |                    |
| Total Harmonic Distortion          | < 0.05%, 10 Hz to 20 kHz, 1 Vpp   |            |   |          |   |          |  |           |                    |
| Non-harmonic Distortion            | ≤ 10MHz: <-70dBc; >10MHz: <-70dBc + 6dB/sound interval; Typical (0dBm)                        |            |   |          |   |          |  |           |                    |
| Phase Noise                        | 10MHz: ≤ -110dBc/Hz Typical (0dBm, 10kHz offset)  |            |   |          |   |          |  |           |                    |
| Square Wave Characteristics        |   |            |   |          |   |          |  |           |                    |
| Rise/Fall Time                     | < 30ns  |            | < 8ns   |          |   |          | < 5ns  |           |                    |
| Overshoot                          | Typical (100 kHz, 1 Vpp) < 5%, (1 Vpp, 50Ω)   |            | Typical (100 kHz, 1 Vpp) < 3%, (1 Vpp, 50Ω)   |          |   |          |  |           |                    |
| Duty Cycle                         | 50.00% (fixed)  |            |   |          |   |          |  |           |                    |
| Ramp Wave Characteristics          |   |            |   |          |   |          |  |           |                    |
| Linearity                          | < 0.1% of peak output (typical 1 kHz, 1 Vpp, symmetry 50%)                                    |            |   |          |   |          |  |           |                    |
| Symmetry                           | 0.0% ~ 100.0%   |            |   |          |   |          |  |           |                    |
| Pulse Wave Characteristics         |   |            |   |          |   |          |  |           |                    |
| Period                             | 200ns-1000ks  |            | 66.667ns-1000ks   |          | 40ns-1000ks   |          | 20ns-1000ks  |           |                    |
| Pulse Width                        | ≥ 48ns  |            | ≥ 18ns  |          | ≥ 12ns  |          | ≥ 7ns  |           |                    |
| Duty cycle                         | 0.1% ~ 99.9% (limited by the frequency setting)   |            |   |          |   |          |  |           |                    |
| Rise and fall time                 | ≥ 32ns (limited by the pulse width setting)   |            | ≥ 8ns (limited by the pulse width setting)  |          |   |          | ≥ 7ns (limited by the pulse width setting)               |           |                    |
| Overshoot                          | Typical (100 kHz, 1 Vpp) < 5%   |            | Typical (100 kHz, 1 Vpp) < 3%   |          |   |          |  |           |                    |
| Jitter                             | < 2ns   |            | ≤ 5MHz: 2ppm + 300ps, >5MHz: 300ps (rms), typical (1Vpp, 50Ω)                                   |          |   |          |  |           |                    |
| Noise Wave Characteristics         |   |            |   |          |   |          |  |           |                    |
| Types                              | Gaussian white noise  |            |   |          |   |          |  |           |                    |
| Bandwidth (-3dB)                   | 25MHz BW  |            | 35MHz BW  |          | 60MHz BW  |          | 80MHz BW   |           | 100MHz BW          |
| Harmonic Wave Characteristics      |   |            |   |          |   |          |  |           |                    |
| Harmonic number                    | ≤ 16  |            |   |          |   |          |  |           |                    |
| Frequency Range                    | 1μHz-12.5MHz  |            | 1μHz-17.5MHz  |          | 1μHz-30MHz  |          | 1μHz-40MHz   |           | 1μHz-50MHz         |
| Harmonic type                      | Odd, even, sequential, custom   |            |   |          |   |          |  |           |                    |
| Harmonic amplitude                 | Each harmonic amplitude can be set  |            |   |          |   |          |  |           |                    |
| Harmonic phase                     | Each harmonic phase can be set  |            |   |          |   |          |  |           |                    |
| Advanced Waveform Characteristics  |   |            |   |          |   |          |  |           |                    |
| Modulation Function                | AM, DSB-AM, FM, PM, PWM, ASK, PSK, BPSK, QPSK, FSK, 3FSK, 4FSK, OSK, SUM                      |            |   |          |   |          |  |           |                    |
| Sweep Function                     | Support type: Linear, logarithmic, Step   |            |   |          |   |          |  |           |                    |
| Burst Function                     | Support type: count (1 ~ 1000,000 cycles), Infinite, gated                                    |            |   |          |   |          |  |           |                    |
| Counter Function                   | Support frequency range: 100 mHz ~ 200 MHz  |            |   |          |   |          |  |           |                    |
| Power Amplifier Function           | - Built-in -  |            |   |          |   |          |  |           |                    |
| Input/Output Characteristics       |   |            |   |          |   |          |  |           |                    |
| Channel Coupling                   | Channel copy, amplitude syn, frequency syn, align phase                                       |            |   |          |   |          |  |           |                    |
| Input                              | External modulation input, External trigger input, External clock input                       |            |   |          |   |          |  |           |                    |
| Output                             | Internal clock output, Sync Output  |            |   |          |   |          |  |           |                    |
| General Specifications             |   |            |   |          |   |          |  |           |                    |
| Display                            | Type  |            | 8-inch color LCD display  |          |   |          |  |           |                    |
| Resolution                         | 800 Horizontal × 480 Vertical pixels  |            |   |          |   |          |  |           |                    |
| Color                              | 65,536 colors, 16 bits, TFT   |            |   |          |   |          |  |           |                    |
| Touch Screen Capacitive            |   |            |   |          | Multi-touch   |          |  |           |                    |
| Communication Interface            | USB Host, USB Device  |            |   |          | USB Host, USB Device, LAN   |          |  |           |                    |
| Power                              | Source  |            | 100 ~ 240 V (±10%), 50/60 Hz  |          |   |          |  |           |                    |
| Power Consumption                  | Less than 50VA  |            |   |          |   |          |  |           |                    |
| Fuse                               | 250V, F2AL  |            |   |          |   |          |  |           |                    |
| Operating Environment              | Temperature to Satisfy  |            | 18 °C ~ 28 °C   |          |   |          |  |           |                    |
| Operating Temperature              | 0 °C ~ 40 °C  |            |   |          |   |          |  |           |                    |
| Relative Humidity                  | Less than 35°C: ≤ 90% relative humidity; 35°C ~ 40°C: ≤ 60% relative humidity                 |            |   |          |   |          |  |           |                    |
| Installation Category              | CAT II  |            |   |          |   |          |  |           |                    |
| Operating Altitude                 | Operating 3,000 meters; Non-operation 12,000 meters   |            |   |          |   |          |  |           |                    |
| Storage Temperature                | -20 °C ~ 60 °C, Humidity: ≤ 70%   |            |   |          |   |          |  |           |                    |
| Pollution Degree                   | IEC 61010 degree 2, Indoor use  |            |   |          |   |          |  |           |                    |
| Safety Designed                    | EN61010-1   |            |   |          |   |          |  |           |                    |
| Cooling Method                     | Smart fan cooling   |            |   |          |   |          |  |           |                    |
| Dimensions & Weight                | 340 (W) × 177 (H) × 90 (D) mm; Approx. 2.5kg  |            |   |          |   |          |  |           |                    |

Note: \*1. The User's available range of the sample rate is from 1 μSa/s to 75 MSa/s. (AFG-4125E/4125AE/4225E is from 1 μSa/s to 30MSa/s) Specifications subject to change without notice. AFG-4000D1\_E\_BH\_202409  
\*2. Not specifically labeled, the load defaults to 50Ω. \*3. DC offset set to zero.

| ORDERING INFORMATION |   |
|----------------------|---|
| AFG-4125E            | 25MHz, 1-Channel Arbitrary Function Generator                       |
| AFG-4125AE           | 25MHz, 1-Channel Arbitrary Function Generator, Plus Power Amplifier |
| AFG-4225E            | 25MHz, 2-Channel Arbitrary Function Generator                       |
| AFG-4235             | 35MHz, 2-Channel Arbitrary Function Generator                       |
| AFG-4260             | 60MHz, 2-Channel Arbitrary Function Generator                       |
| AFG-4280             | 80MHz, 2-Channel Arbitrary Function Generator                       |
| AFG-4210H            | 100MHz, 2-Channel Arbitrary Function Generator                      |
| AFG-4225H            | 250MHz, 2-Channel Arbitrary Function Generator                      |

| ACCESSORIES                   |   |
|-------------------------------|---|
| USB Cable x 1, Power Cord x 1 |   |
| AFG-4125E/4125AE:             | Test Lead, BNC to Alligator Clips Cable x 1       |
| AFG-4225E/4235:               | Test Lead, BNC to Alligator Clips Cable x 2       |
| AFG-4260/4280/4210H/4225H:    | Test Lead, BNC Cable x 2                          |
| OPTIONAL ACCESSORIES          |   |
| GTL-101                       | Test Lead, BNC (P/M) to Alligator, approx. 1100mm |
| GTL-110                       | BNC Cable, BNC (P/M) to BNC (P/M), approx. 1000mm |

**GW INSTEK**  
Simply Reliable