

MSO-2000E Series

VPO
Visual Persistence Oscilloscope

200/100/70MHz Mixed-signal Oscilloscope

FEATURES

- 200/100/70MHz Bandwidth Selections : 2 or 4 Channels
- Real Time Sample Rate Per Channel : 1GSa/s (2 Channel Models);
Maximum Real Time Sample Rate : 1 GSa/s (4 Channel Models)
- MSO-2000E Equips with a 16 Channel Logic Analyzer
- MSO-2000EA Equips with a 16 Channel Logic Analyzer and a Dual Channel
25MHz Arbitrary Waveform Generator
- Free Frequency Response Analyzer Software for MSO-2000EA
- Per Channel 10M Memory Depth and VPO Waveform Display Technology
- Waveform Update Rate up to 120,000 wfms/s
- 8" WVGA TFT LCD
- Maximum 1M FFT Provides Higher Frequency Domain Resolution Measurements
- High Pass, Low Pass and Band Pass Filter Functions
- 29,000 Segmented Memory Sections and Waveform Search Function
- I²C/SPI/UART/CAN/LIN Serial Bus Trigger and Decoding Functions
- Data Log Function is Able to Track Signal Changes up to 1000 Hours
- Mask Test Function
- Network Storage Function

GW INSTEK
Simply Reliable

Economical and Multi-Functional MSO

The MSO-2000E series is a mixed-signal oscilloscope, which offers dual analog channels + 16 digital channels or 4 analog channels + 16 digital channels. The MSO-2000E series includes MSO-2000E and MSO-2000EA. MSO-2000E has a built-in 16-channel logic analyzer and MSO-2000EA has a built-in 16-channel logic analyzer and a dual channel 25MHz arbitrary waveform generator. The entire series features bandwidth selections of 200MHz, 100MHz, and 70MHz. Dual analog channel models provide 1GSa/s real-time sampling rate per channel; four analog channel models provide 1GSa/s maximum real-time sampling rate. The 8-inch 800*480 TFT LCD and the minimum 1mV/div vertical range allow the MSO-2000E series to measure complex feeble signals and clearly display measurement results.

For analog channels, the MSO-2000E series provides 10M long memory for users to completely retrieve and analyze waveforms. Users, based upon the application requirements, can select 1k, 10k, 100k, 1M or 10M memory depth. Short memory depth collocating with the high sampling rate allows users to observe fast-changing waveforms and, on the other hand, long memory depth aims for continuously changing waveforms. The MSO-2000E series is equipped with waveform search and segmented memory functions to expand the flexible applications of 10M long memory. The segmented memory can be divided the maximum into 29,000 sections for users to bypass any unimportant waveforms so as to swiftly search all required waveforms. With the segmented memory function, more meaningful waveforms can be saved and target waveforms can be displayed rapidly. Users, by using the waveform search function, can rapidly search desired waveforms according to the required trigger conditions.

16-channel logic analyzer has a memory depth of 10Mpts per channel, which can retrieve more and longer digital signals as well as clearly display digital signals to obtain sufficient information for analysis. The minimum input swing of logic analyzer represents the minimum operating voltage of ± 250 mV, which demonstrates that digital channels are highly sensitive with respect to input. The standard bus trigger and decoding functions include serial and parallel bus such as I²C, SPI, UART (RS232/422/485) and CAN/LIN bus for automotive communications. The parallel bus function is only for digital channels. Bus waveforms can be triggered and decoded in real time. The MSO-2000E series offers complete analysis and debugging capabilities with the economical pricing.


In addition to a 16-channel logic analyzer, MSO-2000EA has a built-in dual channel 25MHz arbitrary waveform generator with the modulation capability and also features 14 bits vertical resolution; sample rate of 200MSa/s; 13 standard output waveforms Sine, Square, Pulse, Ramp, DC, Noise, Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac; AM/FM/FSK modulation and sweep function. The user friendly interface is the ideal choice for applications such as circuit simulation and education tests.

MSO-2000EA also provide the frequency response analysis function (Bode plot). The FRA software can be directly downloaded from GW Instek website. Via arbitrary waveform generator, oscilloscope, and FRA software, users can obtain DUT's FRA characteristic curve plot. FRA has a very wide application range, including product circuit and component performance verification and analysis such as Feedback of Circuit Design, Filter Design, Amplifier Design, Resonant Circuit Design, Cable Frequency Response, and Signal Transformer Performance. Via FRA, users can preliminarily verify product and analyze component's characteristics without the expensive instrument.

The frequency range of FRA is from 20Hz to 25MHz; the number of test point can be selected from 10 to 90 points per decade. After completing the Bode plot, users can select measurement curve by Cursor so as to retrieve each point's amplitude and phase on the curve.



CAN Bus Trigger and Decode



Dual Channel Arbitrary Waveform Generator




FRA of RC high-pass filter




Cursor measurement for the determination at 3dB cut-off frequency of the high-pass filter.

A. 120,000wfms/WAVEFORM UPDATE RATE AND VPO WAVEFORM DISPLAY TECHNOLOGY

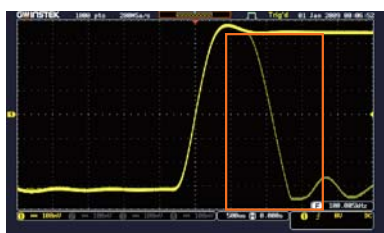


The MSO-2000E series oscilloscope allows users to easily and completely observe inrush signals and rare transient waveforms to increase waveform debugging efficiency by using features, including advanced VPO (Visual Persistence Oscilloscope) signal processing technology, waveform update rate as high as 120,000 wfms/s, and multi-layered afterglow display to enhance waveform display efficiency. Oscilloscope with VPO technology displays signals with three dimensional waveforms constructed by amplitude, time and signal strength to show each waveform point. 256 color gradients yield clear waveform changes. Comparing with the conventional digital storage oscilloscope, the MSO-2000E series provides more natural and more genuine signal display effect which is very close to the original analog signal.

B. DUAL DISPLAY SCREEN ZOOM-IN AND PLAY/PAUSE FUNCTIONS

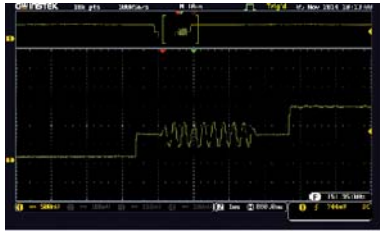


The MSO-2000E series provides the dual display screen zoom-in function to simultaneously display waveforms and major target areas. Users can zoom in display area by adjusting time/div. Under zoom-in mode, waveform can be played or paused so as to automatically view all input waveforms on the moving zoom-in screen. User can swiftly identify each desired event. Manual control play speed and direction can be adjusted according to users' requirements. Press "Pause" to stop the play function. With "waveform search", all desired events from different stages can be rapidly identified and examined back and forth. The MSO-2000E series is capable of swiftly searching signals and observing signals' details. 10M long memory depth provides the function of complete waveform retrieval and analysis.

C. 1M FFT FREQUENCY DOMAIN DISPLAY FUNCTION

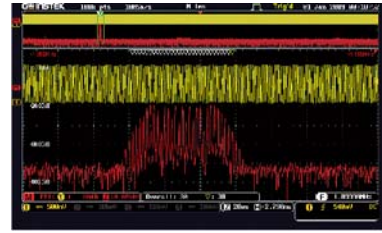

The FFT function of the MSO-2000E Series provides the maximum 1M display for more precision frequency domain display. The function supports four-window displays, including Rectangular, Hamming, Hanning, and Black-harris. Users select window display for frequency domain analysis according to test requirements. The MSO-2000E series not only provides the FFT function but also FFTrms, vertical adjustment, and local zoom-in functions for users to adjust waveforms of frequency domain by their requirements. Via rapid waveform update rate and waveform search functions, users can precisely observe the test results of frequency domain.

D. 38 ITEMS OF AUTO MEASUREMENT SELECTION AND THE STATISTICS FUNCTION

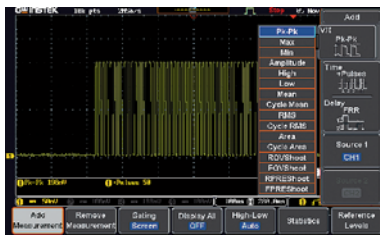

The MSO-2000E series soundly provides 38 measurement items. Based upon the parameters such as voltage, current, time, frequency, and delay measurement, users can decide which measurement items to choose. On the single display screen, the MSO-2000E series



provides 8 measurement selections. The statistics mode can also be selected for users to analyze the mean value, the maximum, the minimum, and standard deviation of the retrieved waveforms to ensure signal's integrity and identify abnormal waveforms.

E. SUPPORT I²C , SPI, UART, CAN, LIN BUS TRIGGER AND DECODING FUNCTION



Decode by Analog Channel



Decode by digital Channel




Display analog waveform converted from digital signal

The serial bus technology has been widely applied in the present embedded application design. To rapidly and correctly trigger and analyze serial bus data has posed a difficult challenge to engineers. The MSO-2000E series provides parallel and serial bus analysis function with 10M long memory depth. Users can select either analog or digital channels to trigger, decode, and analyze frequently used I²C, SPI and UART serial bus and CAN/LIN bus, which is often used by automotive communications. While using digital


channels, the analog waveform converted from digital channels can be observed so as to examine and analyze time-related analog and digital signals. The above-mentioned function can verify and analyze the conversion between analog and digital signals. Currently, many embedded designs are digital signals. The MSO series also provides digital channels for parallel bus analysis and decoding. The above standard serial and parallel bus functions are the best test platform for school courses and embedded circuit designs.

F. WAVEFORM SEARCH FUNCTION

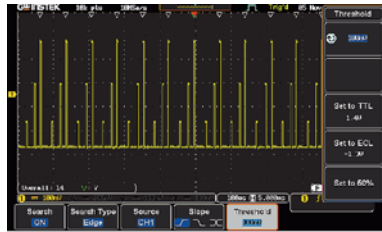


Users can rapidly search desired waveforms according to the trigger condition. After activating the search function, hollow inverted triangles will show the location met the trigger condition. The upper left hand corner Overall will show the total number of waveforms met the trigger condition. Users can set waveform search by the trigger condition such as Edge, pulse width, Runt, Rise/Fall, and Bus. When the trigger condition is met, hollow inverted triangles will appear. Users can save all marks to compare with the next input signal. The front panel of the MSO-2000E series controls waveform zoom-out and play/pause function to swiftly identify each desired event. The function allows users to conveniently complete waveform search and save marks for rapid comparison and analysis.

H. DATA LOG FUNCTION

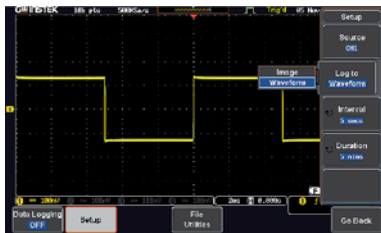


Users, via the data log function, can observe waveform changes in long periods of time to ensure product reliability or measure sporadically appeared signals. The data log function, based on the requirements, can set record time and interval. Record time can be selected from 5 minutes to 1000 hours, and record interval is 5 seconds, the minimum. Waveform type for record data and CSV file format for each channel can also be selected. Data can be stored in USB drive, the MSO-2000E series or the remote computer via LAN.

J. MASK FUNCTION

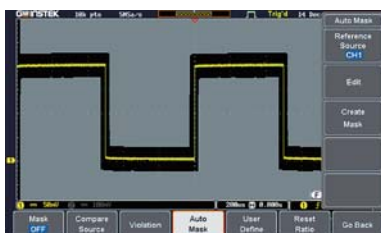


The MSO-2000E series provides the Mask function, which allows users to apply Auto Mask and user-defined Mask to determine whether the quality of the product meets the regulation. Via user-defined mask, users can set up to 8 areas and each area is up to

G. DIGITAL FILTER FUNCTION




Unfiltered Waveform with Noise Interference



Filtered Waveform, Noise Removed


Engineers are often troubled by noise interference while measuring signals in the electric circuit tests. The MSO-2000E series features the digital filter function which can be set to high pass or low pass digital filter. Digital filter allows users to independently set filter frequency for each channel. The tracking on function rapidly sets same filter frequency for all channels.

I. SEGMENTED MEMORY FUNCTION



Users Can Also Select “Analyze Segments” to Conveniently Obtain The Analysis Results.

To achieve the most ideal application for memory depth, the MSO-2000E series has the built-in segmented memory function. The segmented memory function allows users to select the desired important signals for observation. Hence, insignificant signals can be neglected and serial bus decoding; pulse or inrush signals can be identified when retrieving signals. The segmented memory function of the MSO-2000E series allows users to select the number of sections. The maximum sections can be selected are 29,000. After activating the function, users can select and observe waveform for each segment by turning the Variable knob. The ultimate application of memory depth, therefore, is completely realized.

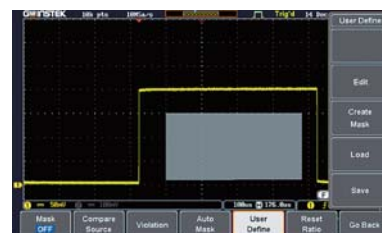

10 points to meet test requirements. Users can also refer to the examples from user manual to edit Mask by the PC to satisfy all test needs. By setting Save On, users can log and monitor signals, which violate test conditions.

PANEL INTRODUCTION



1. Hardcopy Key
2. Autoset, Run/Stop, Single & Default Keys
3. Search and Zooming Controls
4. Trigger Controls
5. Math, Reference & Bus Keys
6. Probe Calibration Output
7. USB Host Port
8. Option Key
9. Menu Off Key
10. Logic Analyzer Probe Connector
11. USB Device Port
12. LAN Port
13. Go-NoGo Output
14. Calibration Output
15. Dual Channel Arbitrary Waveform Generator (MSO-2000EA only)
16. GTL-16E : 16-Channel Logic Analyzer Probe
17. GCP-201 : Probe Clip , 20PCS



MSO-2000E Series SELECTION GUIDE

Model	MSO-2204E	MSO-2202E	MSO-2104E	MSO-2102E	MSO-2074E	MSO-2072E
Bandwidth	200MHz	200MHz	100MHz	100MHz	70MHz	70MHz
Channels	4	2	4	2	4	2
Record Length	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch
Real-time Sampling Rate	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s
Built-in	16 Channel Logic Analyzer					

MSO-2000EA Series SELECTION GUIDE

Model	MSO-2204EA	MSO-2202EA	MSO-2104EA	MSO-2102EA	MSO-2074EA	MSO-2072EA
Bandwidth	200MHz	200MHz	100MHz	100MHz	70MHz	70MHz
Channels	4	2	4	2	4	2
Record Length	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch
Real-time Sampling Rate	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s
Built-in	16 Channel Logic Analyzer and Dual Channel 25MHz Arbitrary Waveform Generator					

SPECIFICATIONS

		MSO-2072E(A)	MSO-2074E(A)	MSO-2102E(A)	MSO-2104E(A)	MSO-2202E(A)	MSO-2204E(A)
VERTICAL SENSITIVITY	Channels	2Ch+EXT	4Ch	2Ch+EXT	4Ch	2Ch+EXT	4Ch
	Bandwidth	DC~70MHz(-3dB)		DC~100MHz(-3dB)		DC~200MHz(-3dB)	
	Rise Time	5ns		3.5ns		1.75ns	
	Bandwidth Limit	20MHz		20MHz		20M/100MHz	
	Vertical Resolution	8 bits : 1mV ~ 10V/div					
	Input Coupling	AC, DC, GND					
	Input Impedance	1MΩ // 16pF approx.					
	DC Gain Accuracy	±(3% when 2mV/div or greater is selected ; ±(5% when 1mV/div is selected					
	Polarity	Normal & Invert					
	Maximum Input Voltage	300Vrms , CAT I (300Vrms CAT II with GTP-070B-4/100B-4/200B-4, 10 : 1 probe)					
	Offset Position Range	1mV/div ~ 20mV/div : ±0.5V ; 50mV/div ~ 200mV/div : ±5V ; 500mV/div ~ 2V/div : ±25V ; 5V/div~10V/div : ±250V					
	Waveform Signal Process	+ , - , × , ÷ , FFT, User Defined Expression FFT : 1Mpts ; FFT : Spectral magnitude. Set FFT Vertical Scale to Linear RMS or dBV RMS ; FFT Window Displays : Rectangular, Hamming , Hanning, Blackman-Harris					

SPECIFICATIONS

		MSO-2072E(A)	MSO-2074E(A)	MSO-2102E(A)	MSO-2104E(A)	MSO-2202E(A)	MSO-2204E(A)
TRIGGER	Source Trigger Mode Trigger Type Trigger Holdoff Range Coupling Sensitivity	CH1 ,CH2, CH3, CH4, Line, EXT* ; *dual channel models only. Auto (Supports Roll Mode for 100 ms/div and slower), Normal, Single Sequence Edge, Pulse Width(Glitch), Video, Pulse Runt, Rise & Fall(Slope), Alternate, Time out, Event-Delay(1~65,535 events),Time-Delay(Duration;4ns~10s), Bus 4ns ~ 10s AC, DC, LF rej. , Hf rej. , Noise rej. 1div					
EXT TRIGGER	Range Sensitivity Input Impedance	±15V DC ~ 100MHz Approx. 100mV; 100MHz ~ 200MHz Approx. 150mV 1MΩ±3%, ~16pF					
HORIZONTAL	Time Base Range Pre-trigger Post-trigger Time Base Accuracy Real Time Sample Rate Record Length Acquisition Mode Peak Detection Average	1ns/div ~ 100s/div (1-2-5 increments); ROLL : 100ms/div ~ 100s/div 10 div maximum 2,000,000 div maximum ±50 ppm over any ≥ 1 ms time interval Max. : 1GSa/s (4ch model); Per channel 1GSa/s (2ch model) 10Mpts/CH Normal, Average, Peak Detect, Single 2ns (typical) Selectable from 2 to 256					
X-Y MODE	X-Axis Input Y-Axis Input Phase Shift	Channel 1 ; Channel 3* (* : four channel models only) Channel 2 ; Channel 4* (* : four channel models only) ±3° at 100kHz					
CURSORS AND MEASUREMENT	Cursors Automatic Measurement Control Panel Function Auto Counter Autoset Save Setup Save Waveform	Amplitude, Time, Gating Available; Unit : Seconds(S), Hz(1/S), Phase (Degrees), Ratio(%) 38 sets : Pk-Pk, Max, Min, Amplitude, High, Low, Mean, Cycle Mean, RMS, Cycle RMS, Area, Cycle Area, ROVShoot, FOVShoot, RPREShoot, FPREShoot, Frequency, Period, RiseTime, FallTime, +Width, -Width, Duty Cycle, +Pulses, -Pulses, +Edges, -Edges, %Flicker, Flicker Idx., FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF, Phase Cursors measurement Cursors measurement 6 digits, range from 2Hz minimum to the rated bandwidth Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo Autoset 20set 24set					
DISPLAY SYSTEM	TFT LCD Type Display Resolution Interpolation Waveform Display Waveform Update Rate Display mode Display Graticule	8" TFT LCD WVGA color display 800 horizontal x 480 vertical pixels (WVGA) Sin(x)/x Dots, Vectors, Variable persistence(16ms~10s), Infinite persistence 120,000 waveforms per second, maximum YT ; XY 8 x 10 divisions					
INTERFACE	USB Port Ethernet Port (LAN) Go/NoGo BNC Kensington Style Lock	USB 2.0 High-speed host port x 1, USB 2.0 High-speed device port x 1 RJ-45 connector, 10/100Mbps with HP Auto-MDIX 5V Max/10mA TTL open collector output Rear-panel security slot connects to standard Kensington-style lock					
LOGIC ANALYSER SPECIFICATIONS	Sample Rate Bandwidth Record Length Input Channels Trigger Type Thresholds Quad Threshold Selections User-defined Threshold Range Maximum Input Voltage Minimum Voltage Swing Input Impedance Vertical Resolution	Per Channel 1GSa/s 200MHz Per Channel 10M pts (max) 16 Digital (D15 - D0) Edge, Pattern, Pulse Width, Serial bus (I2C, SPI, UART(RS232/422/485), CAN, LIN), Parallel Bus D0~D3, D4~D7,D8~D11 ,D12~D15 Thresholds TTL, CMOS(5V,3.3V,2.5V), ECL, PECL,0V ,User Defined ±5V ±40 V ±250 mV 101KΩ probe loading 8pF 1 bit					
AWG SPECIFICATIONS (MSO-2000EA only)	Channels Sample Rate Vertical Resolution Max. Frequency Waveforms Output Range Output Resolution Output Accuracy Offset Range Offset Resolution	2 200 Msa/s 14 bits 25 MHz Sine, Square, Pulse, Ramp, DC, Noise, Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac 20 mVpp to 5 Vpp, HighZ;10 mVpp to 2.5 Vpp, 50 Ω 1mV 2% (1 kHz) ±2.5 V, HighZ;±1.25 V, 50 Ω 1mV					
FREQUENCY RESPONSE ANALYSIS	Dynamic Range Input and Output Sources Frequency Range Number of Test Points Test Amplitude Test Results Manual Measurements Plot Scaling	> 80 dB (typical) Channel 1 or 2 (3 or 4 for four channel model) 20 Hz to 25 MHz 10 to 90 points per decade 20 mVpp to 5 Vpp into High-Z Fixed amplitude across entire sweep Logarithmic overlaid gain and phase plot Two pairs of tracking gain and phase markers Auto-scaled during test					
POWER SOURCE MISCELLANEOUS	Line Voltage Range Multi-Language Menu On-Line Help Time clock Operation Environment	AC 100V ~ 240V, 48Hz ~ 63Hz, auto selection Available Available Time and date, provide the date/time for saved data Temperature: 0°C to 50°C. Relative Humidity: ≤ 80%, 40°C or below; ≤ 45%, 41°C ~ 50°C					
DIMENSIONS & WEIGHT	384(W) X 208(H) X 127.3(D)mm, Approx. 2.8 kg						

Note : Three-year warranty, excluding probes & LCD display panel.

Specifications subject to change without notice.

MSO2000GD2DH

ORDERING INFORMATION

MSO-2204E(A)	200MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2202E(A)	200MHz, 2 + 16 Channel, Mixed-signal Oscilloscope
MSO-2104E(A)	100MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2102E(A)	100MHz, 2 + 16 Channel, Mixed-signal Oscilloscope
MSO-2074E(A)	70MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2072E(A)	70MHz, 2 + 16 Channel, Mixed-signal Oscilloscope

"(A)" have built-in a Dual Channel 25MHz Arbitrary Waveform Generator

ACCESSORIES

Quick start guide, User manual CD x 1, Power cord x 1, **GTL-16E** :16-Channel Logic Analyzer Probe
GTP-070B-4:70MHz(10:1/1:1)Switchable passive probe for MOS-2072E(A)/2074E(A) (one per channel)
GTP-100B-4:100MHz(10:1/1:1)Switchable passive probe for MOS-2102E(A)/2104E(A) (one per channel)
GTP-200B-4:200MHz(10:1/1:1)Switchable passive probe for MOS-2202E(A)/2204E(A) (one per channel)

OPTIONAL ACCESSORIES

GTL-16E	16-Channel Logic Analyzer Probe	GCP-100	Current Probe, DC-100KHz, 100A, Current Probe
GRA-426	Rack Adapter Panel	GCP-1030	Current Probe, DC-100MHz, 30Arms, Current Probe
CAK-003	50Ω Impedance Adapter	GCP-206P	Current Probe - Power Supply, 2 Channel Power Supply for GCP-530/1030
CSC-008	Soft Carrying Case	GCP-425P	Current Probe - Power Supply, 4 Channel Power Supply for GCP-530/1030
GTL-246	USB Cable, USB 2.0, A-B Type, 1200mm	GCP-530	Current Probe, DC-50MHz, 30Arms, Current Probe
GDB-03	Oscilloscope Education & Training Kit	GDP-025	Differential Probe, 25M High Voltage Differential Probe
GTP-033A	Oscilloscope Probe, 35MHz 1:1 Passive Probe, BNC(P/M)	GDP-050	Differential Probe, 50M High Voltage Differential Probe
GCP-020	Current Probe, 40Hz-40kHz, 240A, Current Probe	GDP-100	Differential Probe, 100M High Voltage Differential Probe
GCP-201	Probe Clip, 20PCS		

FREE DOWNLOAD

PC Software	OpenWave software	Driver	USB driver ; LabView driver
--------------------	-------------------	---------------	-----------------------------

GW INSTEK
Simply Reliable