

## TEST SIGNAL GENERATOR FOR COAXIAL CABLE



✓ **Test signal generator to certificate coaxial cable in all the bands used for coaxial cable: CATV and SMATV**

✓ **Six pilots of frequency and level selectable by the user**

- P1: from 5.00 MHz to 10.00 MHz
- P2: from 55.00 MHz to 100.00 MHz
- P3: from 460.00 MHz to 540.00 MHz
- P4: from 800.00 MHz to 1000.00 MHz
- P5: from 1450.00 MHz to 1750.00 MHz
- P6: from 1850.00 MHz to 2150.00 MHz


✓ **Upstream bandwidth: P1, P2**

✓ **Downstream bandwidth (Downstream CATV and UHF): P2, P3, P4**

✓ **Satellite Downstream bandwidth (IF Sat): P4, P5, P6**

- ✓ **Output level independent for each pilot and variable from 80 to 110 dBµV in 1 dB steps.**
- ✓ **Frequency resolution: 25 kHz.**
- ✓ **User interface in several languages.**
- ✓ **USB to PC connection for firmware updating and to configure frequencies and levels.**

Attenuation test compatible with  
TV EXPLORER field meters

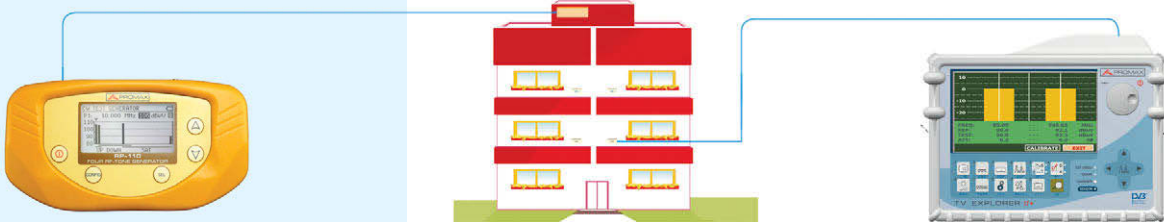

Automatic operation when using the ATTENUATION TEST included in PROMAX TV EXPLORER field meters.