

43050
AIR POWERED BRAKE CALIPER WIND BACK TOOL SET

SAFETY WARNING AND PRECAUTIONS:



- Always follow the instructions provided by the vehicle manufacturer
- For use by trained personnel only
- To maintain an acceptable noise level, do not exceed 116 psi (8 bar) pressure
- The tool is designed to be used with 73 - 116 psi (5-8 bar) pressure.

OPERATING INSTRUCTIONS:

1. Choose an adapter suitable for working on the brake caliper piston. Fit it onto magnetic adapter ①. Connect the tool to the compressed air line, making sure that it does not exceed 8 bar pressure. (Fig.1)
2. Press the release button ② and operate lever ③ to move the push spindle ⑤ forward or backward and fit the tool in to the caliper. (Fig.2)
3. Press button ④ and rotating lever ③ to rotate the brake caliper piston. (Fig.2)
4. After pushing the piston backward, press button ② and pull lever ③ to move the push spindle ⑤ backward, releasing the tool from the caliper. (Fig.3)

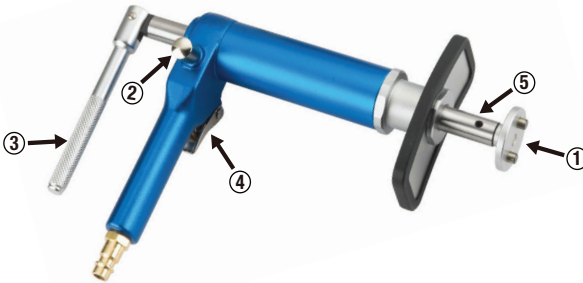


Fig.1



Fig.2






Fig.3



INFORMATION ON ADAPTERS:

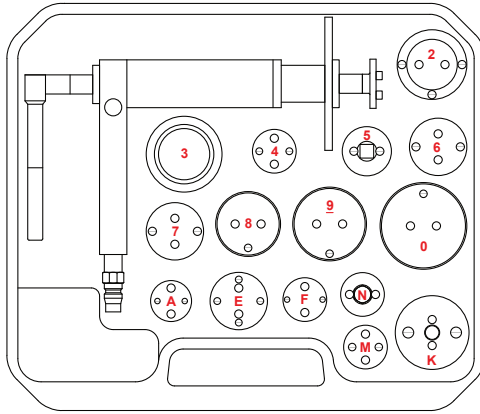

No.	Application
0	GM most 2-1/2" diameter pistons (Seville/Eldored 79)
2	CITROËN (XM, Xantia (F/R)), HONDA
3	AUDI (F), FIAT, ALFA ROMEO (F), FORD (Fiesta (F)), ISUZU (F), HONDA (Concesto (F)), JAGUAR (XJ6, XJ40 (F/R)), BMW (318is, 320i, 325TD, 518i, 525i & 1x, 740i, 850ci, M5 (F)), MERCEDES BENZ (190, 200, 300, 420, 560 series (F)), MITSUBISHI (Colt (F)), NISSAN (Miera, Stanza, Sunny (F)), ROVER (Austin, Metro 200 & 400 series, Maestra, Montego (F)), TOYOTA (Camry (F)), VOLVO (F), VW (Passat, Golf GTI (F))
4	FORD (Australia, NZ Telstar), MAZDA (R), SAAB (9000 (R), Lumina), TOYOTA, FIAT, ALFA ROMEO (164 2.0 (R)), HONDA (Prelude, CRS 16i) GM (Saturn(R), Grand Prix)
5	3/8" Adapter
6	NISSAN (PRIMERA), VW (Golf IV)
7	AUDI (80, 90, V8+100, Coupe E (R)), ROVER (800 ABS), SUBARU (L+Z (R)), FORD (Sierra ABS, Granada, Scorpio ABS 85 (R)), NISSAN (Bluebird 1.8 Turbo, Silvia Turbo, Primera 2.0i LS/GS/GSX (R)), PEUGEOT (405 1.9Gi, Gri, Sri, Gtxi, MI 16, 605 2.0 Sri (R)), TOYOTA (Celica, Corolla GT, MR2 (R)) VW (Golf Gti, Jeta Synchro, Jetta Gti 16v, Passat CL, GL, GT, GT 16v, Corrado 16V Scirocca GTX 16V(R)), CITROËN, ALFA ROMEO, FIAT, HONDA, JAGUAR, RENAULT, SAAB, SEAT, LANCIA
8	GM most 1-7/8" diameter pistons
9	GM most 2-1/8" diameter pistons
A(Z)	RENAULT (R21, Laguna (R))
E	NISSAN (Maximas), FORD
F(G)	OPEL (R)
K	CITROËN
M	FORD (Motors), MINI R68, MAZDA 3
N	SAAB, HONDA, ALFA ROMEO, AUDI, VW, LANCIA



99 Washington Street
 Melrose, MA 02176
 Phone 781-665-1400
 Toll Free 1-800-517-8431

 Visit us at www.TestEquipmentDepot.com

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer.
 For more information go to www.P65Warnings.ca.gov