

# Test Fixtures




## Model 8010 High Power Device Test Fixture:

The Model 8010 High Power Device Test Fixture provides safe and easy connections for testing packaged high power devices at up to 3000V or 100A. The Model 8010 provides connections for a high voltage SourceMeter SMU instrument (Model 2657A), one or two high current SourceMeter SMU instruments (Model 2651A), and three low power SourceMeter SMU instruments (other Series 2600B or Model 4200-SCS source measure unit (SMU) instruments). This allows devices with two terminals (diodes) or three terminals (transistors) or even four or five terminals to be characterized safely and accurately. The Model 8010 has full interlock capability for up to six SourceMeter SMU instruments. The Model 8010 has integrated protection circuits that protect the low voltage SourceMeter SMU instruments from high voltages the Model 2657A can output should a device fault occur. The Model 8010 includes both a high current (100A) and a high voltage (3000V) test socket. Various replacement test socket modules are available, including TO-247, TO-220, axial lead, and a blank socket module that allows building a custom socket. In addition to standard banana jumpers, the Model 8010 has rear-panel scope and thermal probe ports to simplify system integration.

## ACCESSORIES SUPPLIED

|                  |  |
|------------------|--|
| 3 ea. CA-558-2   | Three-Pin Interlock Connector Cables (2m)        |
| 12 ea CA-560-x   | Banana to Banana Jumper Cables (203mm)           |
| 2 ea. CA-562-x   | Safety Banana to Banana Jumper Cables (254mm)    |
| 6 ea. CA-563     | BNC to Banana cables (241mm)                     |
| 2 ea. CA-568-120 | Earth Safety Ground Cables (305cm)               |
| 1 ea. 8010-317   | Socket Insulating Plug Card                      |
| 1 ea. 8010-CTB   | Customizable Test Board                          |
| 2 ea. 8010-DTB   | Device Test Board for TO-247 Devices (3kV, 100A) |

**For use with: 2651A, 2657A, 4200-SCS, 26xxB, 2600-PCT-x, 4200-PCT-x**

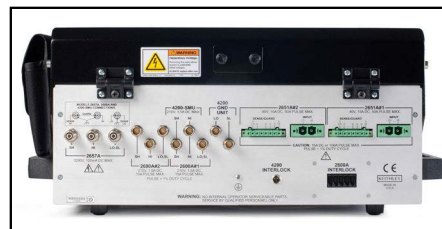

**Model 8009 Resistivity Chamber:** The Model 8009 is a guarded test fixture for measuring volume and surface resistivities. It assures good electrostatic shielding and high insulation resistance up to 1100V. The 8009 is designed for safe operation with the 6517A or 6517B. Opening the lid of the 8009 automatically turns off the 6517A or 6517B voltage source. The 8009 accommodates sheet samples from 64mm to 102mm (2½ to 4 in) in diameter and up to 3.2mm (¼ in) thick. It maintains good sample contact with uniform pressure (from 6 to 10 lbs depending on thickness) on smooth parallel samples.

With the front panel switch on the 8009, toggle between volume and surface resistivity, with the 6517A or 6517B configured to calculate and display the appropriate result automatically. The 8009 permits direct measurement of volume resistivity up to  $10^{18}\Omega\text{-cm}$  (on samples 0.1cm thick) and surface resistivity up to  $10^{17}\Omega/\text{square}$ , in accordance with ASTM procedures.

## ACCESSORIES SUPPLIED

|             |                           |
|-------------|---------------------------|
| 6517-ILC-3  | Interlock Cable for 6517A |
| 6517B-ILC-3 | Interlock Cable for 6517B |
| 7078-TRX-3  | Triax Cable               |
| 8007-GND-3  | Safety Ground Wire        |
| 8607        | Source Cable Set          |

**ENVIRONMENTAL LIMITS:** Operating:  $-30^{\circ}$  to  $+85^{\circ}\text{C}$ , 65% R.H. up to  $35^{\circ}\text{C}$ , derate 3% R.H./ $^{\circ}\text{C}$  above  $35^{\circ}\text{C}$ . Storage:  $-25^{\circ}$  to  $+85^{\circ}\text{C}$ .

**DIMENSIONS:** 108mm high  $\times$  165mm wide  $\times$  140mm deep (4¼ in  $\times$  6½ in  $\times$  5½ in).

**WEIGHT:** 1.45kg (3.19 lbs).

**For use with: 6487, 6517A, 6517B**