

R1234yf SELF-SEALING DESIGN RECHARGE KIT

FEATURES

- Charge A/C systems using R1234yf self-sealing/reusable designed cans

SAFETY WARNING AND PRECAUTIONS




WARNING: Make sure hose has been purged or vacuumed before use

WARNING: Wear safety glasses

OPERATING INSTRUCTIONS

1. Connect can tap fitting to hose and coupler assembly.
2. Connect refrigerant can to the bottom of can tap, turn *counterclockwise*.
3. Turn handle clockwise, to depress the valve in refrigerant can, to flow refrigerant.
4. First time use, purge air in hose.
5. Connect coupler to low side of system, refrigerant will flow into the system.
6. When can is empty properly discard can.

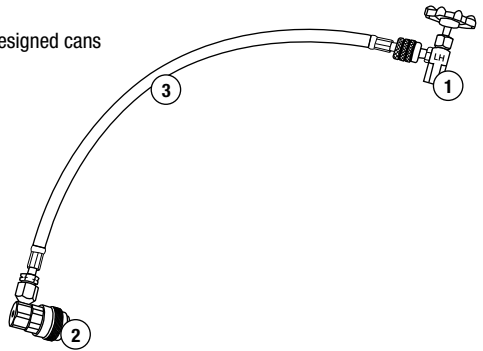

PARTS LIST

ITEM#	PART#	DESCRIPTION
1	85512-YF	R1234yf 1/2" ACME-LH thread self-sealing design can tap valve
2	67534	R1234yf low side quick coupler 12 mm-F x 14 mm
3	83181	R1234yf 18" blue hose



1-800-517-8431

99 Washington Street
Melrose, MA 02176
Phone 781-665-1400
Toll Free 1-800-517-8431

 Visit us at www.TestEquipmentDepot.com

⚠ **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.