



AIRFLOW & ENVIRONMENTAL METER


ABM-200

The ABM-200 Airflow & Environmental Meter is a small, portable, wireless smart tool that, when paired with a smart phone or tablet running the latest CPS Link, can measure, record and e mail a variety of indoor/outdoor temperature, humidity, airflow or pressure conditions taken at residential or commercial job sites.

KEY FEATURES:

- On screen guidance to accurately measure and record test data:
 - Temperature differential, dry bulb, wet bulb
 - and feels like temperatures
 - Airflow velocity and volume
 - Relative humidity, dew point
 - Barometric pressure, air density
 - Indoor/outdoor conditions
 Wind speed/direction/gusts
- Test And Balance Report- Automatically generated from data collected.
- E-mail professional reports for work completed, and where located
- Client Lists Easy to enter and retain client contact information
- Cloud back up of data



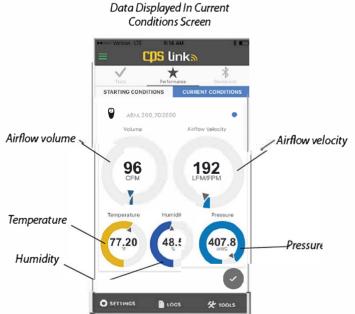





SPECIFICATIONS

Wireless Connection Range	≤100 ft. (30.5 m)						
Airflow Volume	Range: 35-1200 CFM (59-2,038 M³/H)						
Velocity	Range: 44-12,320 fpm (13 - 3,755 mpm)	Accuracy: ±0.5%					
Pressure (mbar)	Range: 300-1100	Accuracy: ±0.12 mbar					
RH	Range: 0-85%	Accuracy: ±4%					
Temperature	Range: 0 °F to 140 °F (-18 °C to 60 °C)						
	Accuracy: ±0.7 °F (0.4 °C)						
Bluetooth Smart	✓						
Auto Power Off	No connection or 30 sec after closing ap	р					
Battery Type	3.0V CR2450 coin cell lithium (remove/reinstall rubbe	r skin to access battery compartment)					
Battery Life	> 500 hrs.						
CPS Link	Patented modular test and measurement system tech	nnology (US Patent No. 9,043,161)					
Warranty	1 Year						

CONDITIONS MEASURED FOR INDOOR **OR OUTDOOR TESTS**

Environmental Condition	Outdoor Test	Indoor Test			
Dry Bulb	✓	✓			
Web Bulb	✓	✓			
Feels Like	✓	✓			
Relative Humidity	✓	✓			
Dew Point	✓	✓			
Barometric Pressure	✓	✓			
Air Density	✓	✓			
Wind Speed	✓				
Wind Direction	✓				
Maximum Wind Gust	✓				

EASY ON-SCREEN GUIDANCE TO RECEIVE, STORE & SEND DATA



ABM-200 packed in clamshell (included)



List of tests to select from

Volume: 137 CFM

Velocity: 274.4 LFM/FPM

Relative Humidity: 49.8 %

ADD NOTE

Temperature: 77.8 °F

00:00:11



Enter duct information



Log of completed tests



Airflow Velocity and Volume test data



Test & Balance report

FRFF	CPS	I INIK™	ΔPP	DOWNLOAD
FNEE	UFO		AFF	DOWNLOAD









iPhone 4S or newer.



Hara-ces	
Google Play	Airflow Temperature and
rsion 4.3 or higher	Humidity test data

PACKAGING	CLAMSHELL				INTERMEDIATE CARTON				MASTER CARTON			
	LxWxH	Weight	Meter Qty	Bar Code	LxWxH	Weight	Meter Qty	Bar Code	LxWxH	Weight	Meter Qty	Bar Code
ABM-200	5.00 x 2.40 x 1.00 inches (127 x 61 25 mm)	0.22 lb 0.10 kg	1	850470006022	7.00 x 5.80 x 5.80 inches (178 x 147 x 147 mm)	2.93 lb 1.33 kg	12	30850470006023 ABM-200-C	12.60 x 7.70 x 12.70 inches (320 x 196 x 323 mm)	12.00 lb 5.44 kg	48	20850470006026 ABM-200-MC