

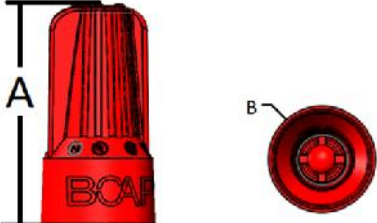


		<b>B-CAP® WIRE CONNECTORS</b>		<b>MODELS B1, B2, B4</b>																									
<b>FEATURES/BENEFITS:</b>																													
		<ul style="list-style-type: none"> <li>- LOW PROFILE DESIGN GETS YOU INTO TIGHT SPACES AND HARD-TO-REACH SPOTS COMFORTABLY</li> <li>- SLIM, CLASSIC FINS OFFER A SECURE GRIP FOR EXTRA LEVERAGE AND EASY INSTALLATION</li> <li>- LIVE-ACTION SPRING EASILY HANDLES 2 #18 TO 5 #12, AND WILL EVEN DEAD-END A SINGLE #14</li> <li>- UNIQUE, SPACE-SAVING PROFILE IS PERFECT FOR "OLD WORK" OR SHALLOW BOXES</li> <li>- EASILY REMOVED FOR REPEAT USAGE ON SAME SIZE OR LARGER WIRE COMBINATION</li> </ul>																											
<b>ELECTRICAL:</b>																													
VOLTAGE:		600 V MAX																											
GENERAL:		1000 V MAX																											
SIGN/LUMINAIRES:																													
<b>PHYSICAL:</b>			<b>STANDARDS &amp; SPECIFICATIONS:</b>																										
HOUSING: <b>NYLON</b>			UL 486 C																										
INSERT: <b>STEEL</b>			UL 94V-2 FLAME RATING																										
PLATING: <b>ZINC</b>			CSA- C22.2 NO. 188																										
TEMPERATURE: 105° C (221° F)			RoHS COMPLIANT																										
			IEC 998-2-4																										
																													
<b>WIRE RANGE &amp; COMBINATIONS:</b>																													
- Solid and/or stranded wire combinations unless stated otherwise - Consult website for other combinations not listed																													
<b>MODEL B1 (YELLOW)</b>		<b>MODEL B2 (RED)</b>		<b>MODEL B4 (BLUE/GRAY)</b>																									
STRIP LENGTH: 1/2", strip wires #16 and smaller 5/8"		STRIP LENGTH: 1/2", strip wires #16 and smaller 5/8"		STRIP LENGTH: 3/4"																									
4 to 6 #22 3 to 6 #20 2 to 6 #18 2 to 5 #16 2 to 4 #14 2 to 3 #12		5 to 6 #22 3 to 6 #20 2 to 5 #18 2 to 5 #16 2 to 5 #14 2 to 4 #12 2 #10		4 to 6 #14 2 to 5 #12 2 to 4 #10 2 #8 2 #6																									
<b>DIMENSIONS:</b>																													
		<table border="1"> <thead> <tr> <th rowspan="2">MODEL</th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>INCHES</th> <th>mm</th> <th>INCHES</th> <th>mm</th> </tr> </thead> <tbody> <tr> <td>B1</td> <td>0.96</td> <td>24.5</td> <td>0.5</td> <td>12.6</td> </tr> <tr> <td>B2</td> <td>1.22</td> <td>29.6</td> <td>0.59</td> <td>14.9</td> </tr> <tr> <td>B4</td> <td>1.51</td> <td>38.2</td> <td>0.76</td> <td>19.3</td> </tr> </tbody> </table>				MODEL	A		B		INCHES	mm	INCHES	mm	B1	0.96	24.5	0.5	12.6	B2	1.22	29.6	0.59	14.9	B4	1.51	38.2	0.76	19.3
MODEL	A		B																										
	INCHES	mm	INCHES	mm																									
B1	0.96	24.5	0.5	12.6																									
B2	1.22	29.6	0.59	14.9																									
B4	1.51	38.2	0.76	19.3																									
<b>ORDERING INFO:</b>																													
<b>MODEL B1 (YELLOW)</b>			<b>MODEL B2 (RED)</b>			<b>MODEL B4 (BLUE/GRAY)</b>																							
QUANTITY	CAT. NO.	WEIGHT (lbs)	QUANTITY	CAT. NO.	WEIGHT (lbs)	QUANTITY	CAT. NO.	WEIGHT (lbs)																					
BOX OF 100	<b>B1-1</b>	0.70	BOX OF 100	<b>B2-1</b>	0.77	BOX OF 25	<b>B4-1</b>	0.45																					
JAR OF 250	<b>B1-250JR</b>	1.00	JAR OF 350	<b>B2-350JR</b>	2.56	CARTON OF 250	<b>B4-B</b>	4.20																					
JAR OF 500	<b>B1-500JR</b>	1.90	JAR OF 500	<b>B2-500JR</b>	3.65																								
BAG OF 500	<b>B1-B</b>	1.70	BAG OF 500	<b>B2-B</b>	3.25																								
BARREL OF 25,000	<b>B1-SK</b>	85.00	BARREL OF 25,000	<b>B2-SK</b>	160.00																								