

BLACKMAX[®]

BTLDTW DIGITAL TORQUE WRENCH

BLACKMAX[®] DIGITAL TORQUE WRENCH

Ideal for HVAC mini-split installations or where OEM-specified torque settings are critical, the BlackMax[®] digital torque wrench exceeds the capabilities of mechanical-only torque wrenches by offering a variety of user-friendly features in a lightweight, durable and ergonomic housing.

The BTLDTW stores 5 factory and 5 user-defined presets, and is able to simultaneously display stored vs. actual torque values. Large display numbers prevent misreading torque data, a common problem when using wrenches without digital displays. View "Peak" and "Track" torque data with audible (tone), visual (LED) and tactile (vibration) "torque alerts" to prevent over-tightening by providing advance warning when approaching or exceeding predefined torque settings.


KEY FEATURES

- Ensures OEM torque setting compliance
- Ideal for HVAC mini-split installations
- Jaw opening: 3/16" to 1-3/8" (5 to 35mm)
- Torque settings: Lbf.ft, Lbf.in, N-m, Kgf.m
- Pre-set and actual torque values:- View both same time
- LED Torque Alerts: Green= within 50-98%, Red= within 2%
- Memory Presets: 5 common, 5 open for custom torque values
- Track mode - View real-time torque value reached during use
- Peak mode - Maximum torque value reached is stored temporarily
- Auto-Off (Selectable): Conserves battery life
- Display light key



BTLDTW

Test Equipment Depot



1-800-517-8431

99 Washington Street Melrose,
MA 02176

800.517.8431

TestEquipmentDepot.com

CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of any relevant information before placing any orders. © CPS Products, Inc. All rights reserved.

cps[®]

FEATURES


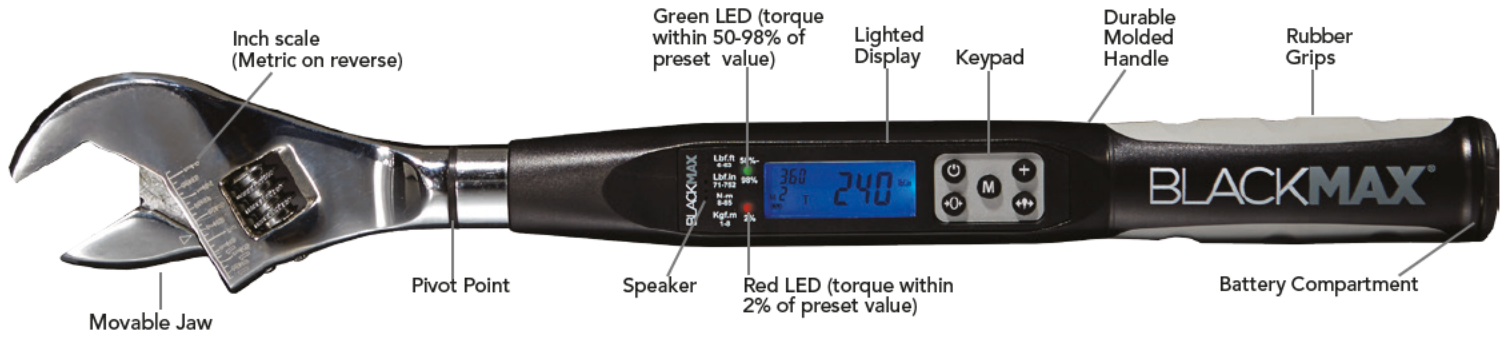


Chart inside Case Lid


MEMORY#	Memory Presets		Nut Size		Tube Size
1	Lbf.ft	14	5/8"	1/4"	5/16"
	Lbf.in	168	11/16"		
	N-m	18		17mm	
	Kgf.m	1.8		1/4"	
2	Lbf.ft	30	13/16"	3/8"	3/8"
	Lbf.in	360		22mm	
	N-m	42		22mm	
	Kgf.m	4.2		3/8"	
3	Lbf.ft	40	15/16"	1/2"	1/2"
	Lbf.in	480		24mm	
	N-m	54		24mm	
	Kgf.m	5.5		1/2"	
4	Lbf.ft	48	1-1/16"	5/8"	1/2"
	Lbf.in	576		26mm	
	N-m	55		26mm	
	Kgf.m	5.6		1/2"	
5	Lbf.ft	59	1-5/16"	3/4"	5/8"
	Lbf.in	708		27mm, 29mm	
	N-m	65		27mm, 29mm	
	Kgf.m	6.6		27mm, 29mm	

Positions 6-10 available for user-defined torque values

DISPLAY (Enlarged, Light On)

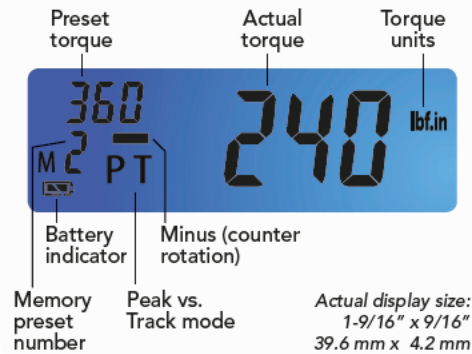


KEYPAD (Enlarged)

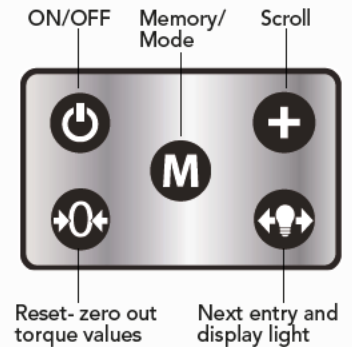

BATTERY COMPARTMENT



REVERSE SIDE

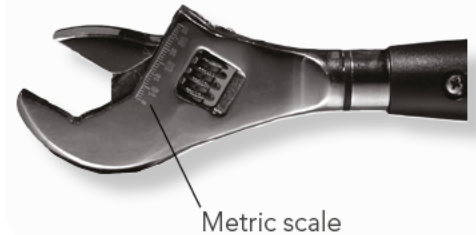

Torque Units (Selectable)	N-m	Kgf.m	Lbf.ft	Lbf.in
Torque Measurement Range	8-85	1-8	6-63	71-752
Display Resolution	0.1 N-m	0.1 Kgf.m	0.1 Lbf.ft	1.0 Lbf.in
Accuracy	± 2% clockwise and counter-clockwise of reading, 10% to 100% of full scale			
Jaw Opening	3/16" – 1-3/8" (5 - 35 mm)			
Operating Voltage	3V (2 x AAA batteries, supplied)			
Operating Temperature	32°F~104°F (0°C ~ 40°C)			
Storage Temperature	-4°F ~113°F (-20°C ~ 45°C)			
Wrench (+ Case) Weight	2.79 lbs (1.27 kg)			
Wrench Length	15.25" (0.387 m)			
Green LED Flashes	Within 50% to 98% of programmed torque (in Peak or Track mode)			
Intermittent Tone	Within +5N-m of programmed torque value			
Red LED On	Within 2% of programmed torque value			
Faster Tone	Within +- 2 N-m of programmed torque value			
Continuous Tone + Constant Green LED & Handle Vibrates	When >2% over programmed torque value			
Display Constant On:	Battery life = approx. 120 hours			
Display & Backlight Constant On:	Battery life = approx. 96 hours			
Replacement Battery Cap	BTLDTWCX			