



Cruiser

Ideal for weighing, counting and checkweighing, the durable Cruiser series includes two portable ranges. The CCT counting scale stores 140 PLUs or piece weights to improve efficiency. The CKT checkweighing scale offers a color-changing display that shows if the weight is over, under, or within set limits.

Both ranges feature the same sturdy design with heavy-duty stainless steel platforms and identical user interfaces. All Cruiser models provide smooth connectivity with computers and printers.

CRUISER BENCH SCALE SERIES

CRUISER CKT CHECKWEIGHING SCALES



- Expedite repetitive weighing tasks with a backlit display that changes color, showing if the weight is over, under, or within the set limit.
- Cruiser CKT scales can store and recall over/under limits. Quickly enter known sample weights on the full numeric keypad.
- Seven built-in applications.

Applications

- Weighing
- Parts counting
- Checkweighing
- Check counting
- Accumulation of weight
- Percentage weighing
- Net total weighing

CRUISER CCT COUNTING SCALES



- Intuitive software keeps track of the count, automatically optimizing the unit weight for greater accuracy.
- Cruiser CCT can store and recall piece weights for 140 product lookups (PLUs).
- Three screens show 'Weight', 'Unit Weight' and 'Count'.


Applications

- Weighing
- Parts counting
- Check counting

Featuring durable construction, the Cruiser compact bench series includes several ranges that are ideal for production, warehouse, or field use.

Rugged Design

All Cruiser models feature ABS housing, stainless steel recessed pan, and non-slip feet.

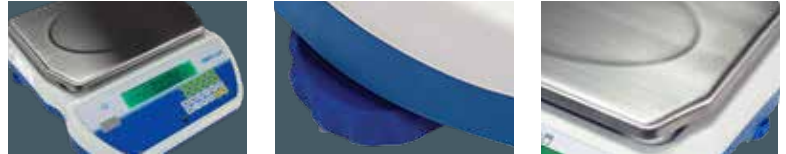

Power Options

Cruiser scales are powered by an AC adapter or rechargeable battery.



Data Connections

Quickly transmit results to a computer or printer via the RS-232 connection or optional USB interface.



Features	CKT	CCT
Screen changes color	in checkweighing mode	N/A
RS-232	Standard	Standard
USB	Optional	Optional
Rechargeable battery	Included	Included
Number of LCDS	1	3
High-resolution models	5	4
PLU	50	140
Weighing Units	5	3

Accessories

Item number Description

3074010267	USB cable
2020013913	In-use cover (pack of 5)
2020013914	In-use cover (pack of 10)
3022013911	In-use cover
1120011156	ATP thermal printer
3014011014	RS-232 cable M-F
600002028	AdamDU Data Collection Program
202000001	Weigh-below hook (factory-fitted)
700660290	Calibration certificate
1120014641	AIP impact printer
2020013915	USB option
303147960	Small scoop
303147961	Medium scoop
303147959	Large scoop

General Specifications

- Interface: RS-232, optional USB
- Power supply: 12VDC 800mA adapter
- Display: Backlit LCD with 15mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

Cruiser CKT Checkweighing Scales

Model	CKT 4	CKT 8	CKT 16	CKT 32	CKT 48	CKT 8H	CKT 8UH	CKT 16UH	CKT 32UH	CKT 48UH
Capacity	8lb / 4kg	16lb / 8kg	35lb / 16kg	70lb / 32kg	100lb / 48kg	16lb / 8kg	16lb / 8000g	35lb / 16kg	70lb / 32kg	100lb / 48kg
Readability	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g	0.002lb / 1g	0.005lb / 2g	0.0002lb / 0.1g	0.0001lb / 0.05g	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g
Repeatability (S.D.)	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g	0.004lb / 2g	0.01lb / 4g	0.0004lb / 0.2g	0.0002lb / 0.1g	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g
Linearity (+/-)	0.0006lb / 0.3g	0.001lb / 0.6g	0.003lb / 1.5g	0.006lb / 3g	0.01lb / 6g	0.0006lb / 0.3g	0.0006lb / 0.3g	0.001lb / 0.6g	0.003lb / 1.2g	0.006lb / 3g
Pan Size	8.3"x11.8" / 210x300mm									
Weighing Units	g, kg, lb, oz, lb:oz									

Cruiser CCT Counting Scales

Model	CCT 4	CCT 8	CCT 16	CCT 32	CCT 48	CCT 8UH	CCT 16UH	CCT 32UH	CCT 48UH	
Capacity	8lb / 4kg	16lb / 8kg	35lb / 16kg	70lb / 32kg	100lb / 48kg	16lb / 8000g	35lb / 16kg	70lb / 32kg	100lb / 48kg	
Readability	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g	0.002lb / 1g	0.005lb / 2g	0.0001lb / 0.05g	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g	
Repeatability (S.D.)	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g	0.004lb / 2g	0.01lb / 4g	0.0002lb / 0.1g	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g	
Linearity (+/-)	0.0006lb / 0.3g	0.001lb / 0.6g	0.003lb / 1.5g	0.006lb / 3g	0.01lb / 6g	0.0006lb / 0.3g	0.001lb / 0.6g	0.003lb / 1.2g	0.006lb / 3g	
Internal Counting Resolution	1:600,000									
Pan Size	8.3"x11.8" / 210x300mm									
Weighing Units	g, kg, lb									

GENERAL SPECIFICATIONS

Stabilization Time (sec)	2
Interface	RS-232, Optional USB
Calibration	External calibration
Display	Backlit LCD with 0.6"/ 15mm -high digits
Power Supply	12VDC 800mA adapter / Internal rechargeable battery
Operating Temperature	-10° to 40°C / 14° to 104°F
Housing	ABS plastic
Overall Dim.	12.8"x14"x4.5" / 326x355x115mm (wxdxh)
Net Weight	7.3lb / 3.29kg