THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

Test Equipment Depot

99 Washington St. Melrose MA, 02176 1.800.517.8431 781.665.0780 (Fax)

Visit us at www.TestEquipmentDepot.com

REVISIONS REV. **DESCRIPTIONS** DATE **APPROVED** CLASS A RELEASED 7/12/99 NOTE 3: ADDED IEC 61010-031 1,000 V CAT IV & Α 2/7/05 RoHS; REVISED PLUG CONFIGURATION, PAGE 2.

- 1. 4mm BANANA PLUG LEAD, SHEATHED PLUG TO SHEATHED PLUG, 0.75mm2, SILICONE JACKETED WIRE. CE MARK AND CSA LISTED (US AND CANADA).
- 2. SPECIFICATIONS:

WIRE:

REINFORCED SILICONE (-60° C TO +180° C) 195x0.07mm STRANDED BARE COPPER, 0.75mm2 CROSS SECTION, 18 AWG, $\emptyset.146\pm.008$ ($\emptyset3.7\pm0.2$ mm) O.D.

INSULATED HOUSING:

POLYPROPYLENE THERMOPLASTIC, UL94V-0.

CONTACT:

4mm, 9 LEAF, BERYLLIUM COPPER, NICKEL PLATED.

PLUG BODY:

BRASS, NICKEL PLATED.

3. RATING:

IEC 61010-031 @ 1,000 V CAT IV P2.

CURRENT: 12 A MAX.


INTERNAL RESISTANCE: 55 m Ω MAX @ 200 cm LENGTH.

TEMPERATURE: -25° C TO $+80^{\circ}$ C.

CE DECLARATION OF CONFORMITY, LVD CONFORMS TO ROHS DIRECTIVE 2002/95/EC.





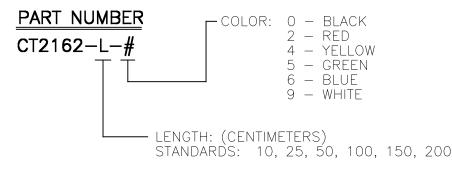

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA					
		± 1/32 .XX ± .02 .XXX ±.005 DO NOT SCALE DRAWING	APPROVALS DRAWN WDH CHECKED	DATE 7/12/99					D PLUGS, CONE	
NEXT ASSY	USED ON	FINISH	ENGR. DESIGN ACTIVITY		SIZE	CAGE CODE 43F45	DWG	. NO. P	217600	REV.
APPLICATION					SCALE	NONE			SHEET 1 OF	2

