


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

Test Equipment Depot
 99 Washington St. Melrose MA, 02176
 1.800.517.8431 | 781.665.0780 (Fax)
 Visit us at www.TestEquipmentDepot.com

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/11/99	

- DO-IT-YOURSELF (DIY) 4mm IN-LINE JACK, SCREW ATTACHMENT.
- SPECIFICATIONS:
 INSULATOR BODY: POLYAMIDE (NYLON)
 JACK BODY: BRASS, NICKEL PLATED
- RATING:
 VOLTAGE: 1,200V AC/DC
 CURRENT: 36A MAX.
 TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:
 CONDUCTOR: Ø.090 (12AWG)
 STRIP LENGTH: .25 (6.4)

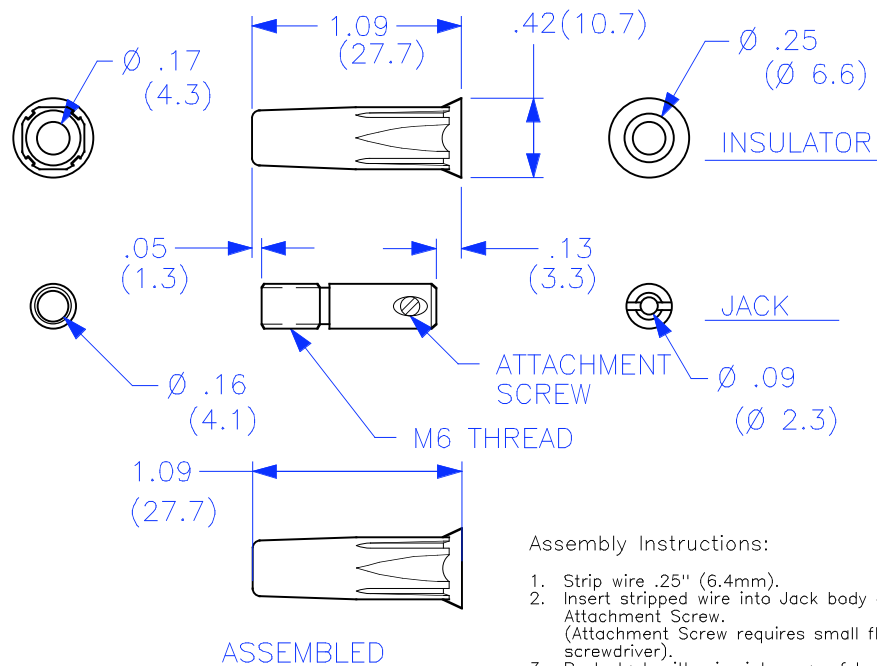

PART NUMBER

CT2215-#

COLOR: 0 — BLACK
 2 — RED
 4 — YELLOW
 5 — GREEN
 6 — BLUE
 9 — WHITE

Assembly Instructions:

- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack body and tighten Attachment Screw.
(Attachment Screw requires small flat blade screwdriver).
- Push Jack with wire into rear of Insulator housing and thread.
- Using same small screwdriver, engage Jack slots through rear of Insulator and snug Jack into Insulator housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING		CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA	
		MATERIAL		APPROVALS		DATE	
		FINISH		DRAWN WDH		7/11/99	
NEXT ASSY		USED ON		CHECKED		TITLE	
APPLICATION				ENGR.		DIY 4mm JACK, SCREW	
				DESIGN ACTIVITY		SIZE A	
						CAGE CODE 43F45	
						DWG. NO. P221500	
						REV. —	
						SCALE 1:1	
						SHEET 1 OF 1	