

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

**Test Equipment Depot**  
99 Washington St. Melrose MA, 02176  
1.800.517.8431 | 781.665.0780 (Fax)  
© Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)


REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/11/99	


- 4mm INSULATED JACK, SOLDER.
- SPECIFICATIONS:  
INSULATOR: POLYAMIDE (NYLON)  
JACK BODY: BRASS, NICKEL PLATED  
NUT: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1,200V AC/DC  
CURRENT: 36A MAX.  
TEMPERATURE: -20° C TO +80° C.
- MOUNTING HOLE: REFERENCE DIAGRAM.
- MAXIMUM PANEL THICKNESS: .20 (5.1)

### PART NUMBER

**CT2228-#**

COLOR: 0 — BLACK  
2 — RED  
4 — YELLOW  
5 — GREEN  
6 — BLUE  
9 — WHITE

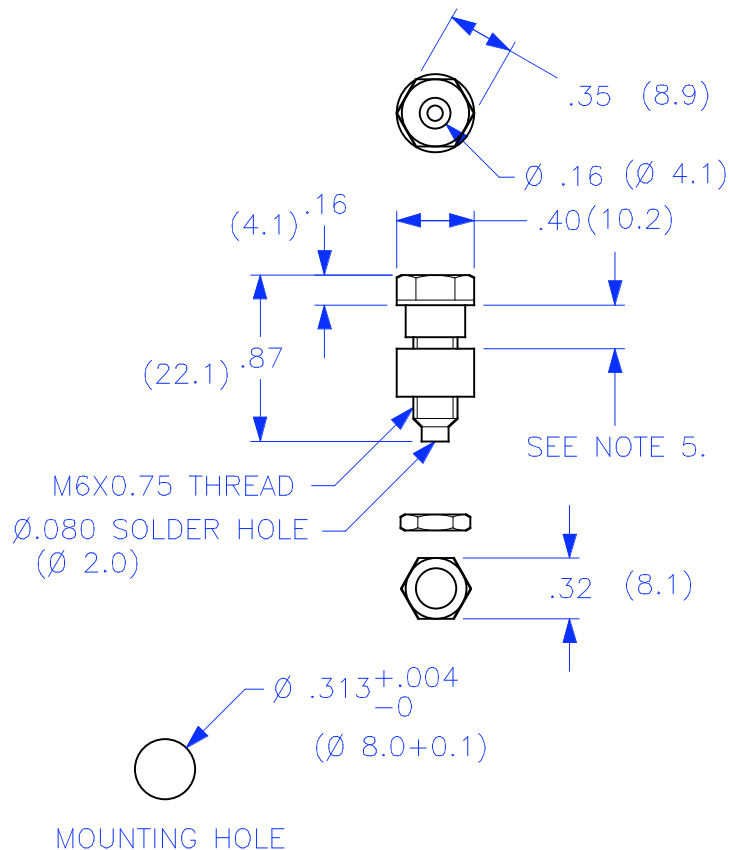

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS      DECIMALS ± 1/32            .XX ± .02 .XXX ±.005  DO NOT SCALE DRAWING	CONTRACT NO.		<div>Cal Test Electronics</div> <div>22820 Savi Ranch Parkway Yorba Linda, CA</div>				
			APPROVALS	DATE	TITLE  4mm INSULATED JACK, SOLDER				
			DRAWN	WDH					7/11/99
			CHECKED						
			ENGR.						
MATERIAL		DESIGN ACTIVITY		SIZE	CAGE CODE	DWG. NO.	REV.		
FINISH				A	43F45	P222800	—		
NEXT ASSY				SCALE		1:1	SHEET	1 OF 1	
USED ON									
APPLICATION									

For detailed specifications and ordering info go to [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)