THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS. INC.



99 Washington St. Melrose MA, 02176 1.800.517.8431 781.665.0780 (Fax)

Visit us at www.TestEquipmentDepot.com

1. 4mm SAFETY JACK w/.25 FASTON® TERMINAL.

2. SPECIFICATIONS:

INSULATOR: POLYAMIDE (NYLON). CONTACT: BRASS, NICKEL PLATED LOCKING NUT: BRASS, NICKEL PLATED

3. RATING:

VOLTAGE: 1,000 V CAT III/600 V CAT IV P2 (IEC61010-031)

CURRENT: 36 A MAX. RESISTANCE: $<5 \text{ m}\Omega$.


TEMPERATURE: -20° C TO $+80^{\circ}$ C.

4. MOUNTING HOLE: REF. DIAGRAM.

5. INSULATOR THREAD, M12 X 0.75. MAX. TORQUE 1.7 ft-lb (2.3 Nm) AT 20° C.

6. MAXIMUM PANEL THICKNESS: .40 (10).

7. RECOMMENDED ASSEMBLY TOOL: CT2246A.



- COLOR: 0 - BLACK

1 - BROWN

2 - RED

3 - ORANGE (SPECIAL)


4 - YELLOW 5 - GREEN

6 - BLUE 7 - PURPLE

8 - GRAY

CONFORMITY TO RoHS 2002/95/EC 9 - WHITE

REVISIONS									
REV.	DESCRIPTIONS	DATE	APPROVED						
_	CLASS A RELEASED	7/12/99							
А	TITLE, ORANGE DISCONTINUED	9/20/03							
В	NOTE 2, MAT'L WAS POLYACETAL	5/19/06							
С	COLOR ORANGE RE-ADDED AS SPECIAL; REVISED NOTE 5 WITH NUT TORQUE SPECIFICATION; NOTED ROHS COMPLIANCE.	6/2/09							

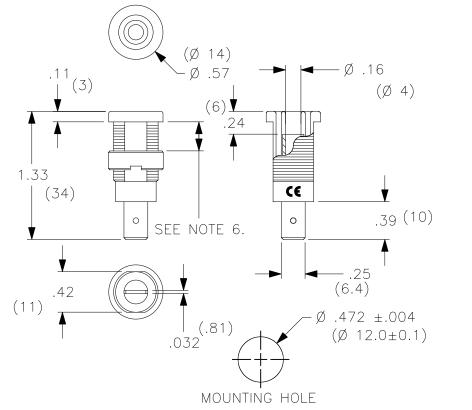

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS			Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA						way
$-(\oplus)$		± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE	TITLE					
			DRAWN WDH	7/12/99	1	4mm SAFETY JACK, PANEL					
		MATERIAL	ATERIAL CHECKED		w/.25 FASTON® TERMINAL						
		FINISH	ENGR.		SIZE	CAGE CODE		DWG. NO.	DO	223800	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		<u> </u>	43F4	ŀ 5	P223800 C			С
APPLICATION		1			SCALE	1:1				SHEET 1 OF	1