

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

Test Equipment Depot
 99 Washington St. Melrose MA, 02176
 1.800.517.8431 | 781.665.0780 (Fax)
 Visit us at www.TestEquipmentDepot.com


- SAFETY JACK w/ \varnothing .075 (\varnothing 1.9) X .48 (12) PIN.
- SPECIFICATIONS:
 INSULATOR: POLYAMIDE
 CONTACT: BRASS, NICKEL PLATED
 LOCKING NUT: BRASS, NICKEL PLATED
- RATING:
 VOLTAGE: 1,000 V CAT III P2 (IEC 61010-1)
 CURRENT: 36 A MAX.
 RESISTANCE: <5m Ω .
 TEMPERATURE: -20° C TO +80° C.
- MOUNTING HOLE: REF. DIAGRAM
- INSULATOR THREAD, M12 X 0.75
- MAXIMUM PANEL THICKNESS: .40 (10.2).

PART NUMBER

CT2904-#

COLOR: 0 - BLACK
 1 - BROWN
 2 - RED
 3 - ORANGE
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 7 - PURPLE
 8 - GRAY
 9 - WHITE

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/99	
A	REVISED CONFIGURATION & MATL. MOUNTING HOLE. NEW TOOLING.	4/18/04	

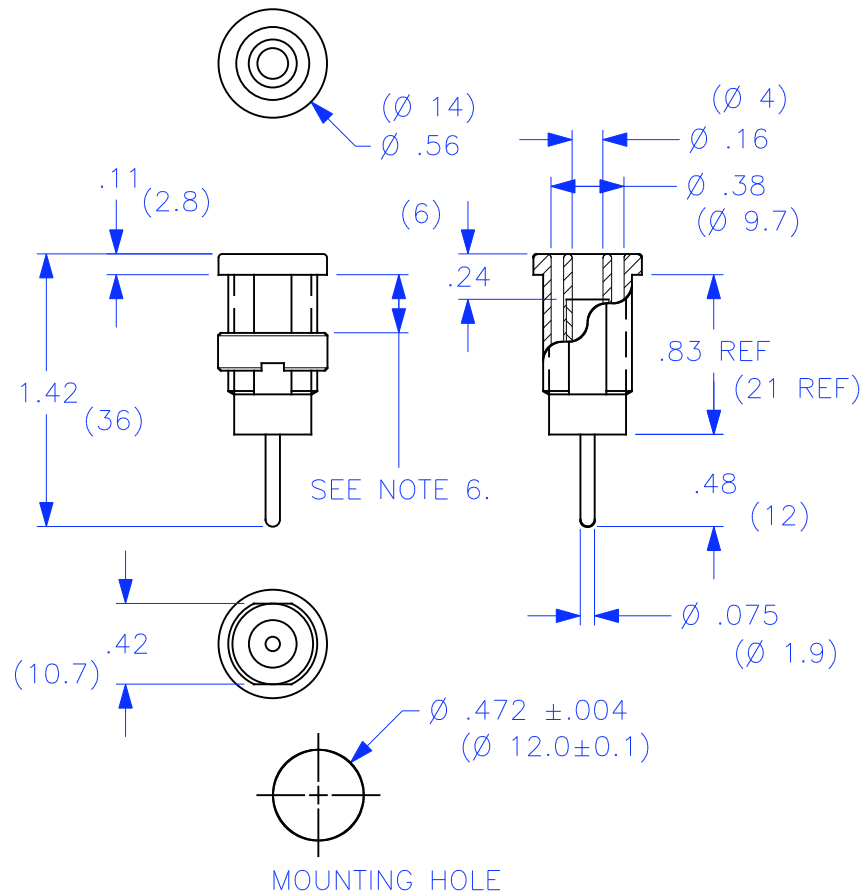

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$.XX \pm .02 DO NOT SCALE DRAWING .XXX \pm .005		CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA	
		MATERIAL		APPROVALS		TITLE	
		FINISH		DATE		4mm SAFETY JACK, w/ \varnothing .075X.48 SHORT PIN	
NEXT ASSY		USED ON		DRAWN WDH		7/12/99	
APPLICATION				CHECKED			
				ENGR.			
				DESIGN ACTIVITY			
				SIZE A		CAGE CODE 43F45	
				DWG. NO. P290400		REV. A	
				SCALE 1:1		SHEET 1 OF 1	