

CT4072

100 MHz Differential Probe

Datasheet

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

TestEquipmentDepot.com

Overview:

The CT4072 is an active differential probe with a high input impedance and low input capacitance. With a 100 MHz bandwidth, this probe is great for working on a wide variety of measurements ranging up to ± 3500 V. The CT4072 is compatible with oscilloscopes from all major manufacturers.

Features:

- 100 MHz bandwidth (-3 dB)
- Up to ± 3500 V (DC + AC peak)
- Attenuation 100x/200x/500x/1000x
- High accuracy ($\pm 2\%$)
- Power indicator LED
- Meets IEC 61010-1 CAT II safety standard



Kit Contents:

- Differential probe
- (2) High voltage hook probes
- (2) Alligator clips
- (2) 4 mm probes
- (2) Retractable, sheathed 4 mm banana plug test leads, silicone jacketed
- (1) Insulated BNC cable
- (1) 9 V power adapter

Technical data subject to change.

© Cal Test Electronics 2017.

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25 °C ± 5 °C.

Electrical Characteristics	
Bandwidth	100 MHz
Rise Time	18 ns for 200x, 500x, & 1000x 25 ns for 100x
Attenuation	100x, 200x, 500x, 1000x
Accuracy	±2% *
AC CMRR	80 dB @ 60 Hz 60 dB @ 100 Hz 50 dB @ 1 MHz
Maximum Input Voltage (100x) (DC + AC peak)	±350 V
Maximum Input Voltage (200x) (DC + AC peak)	±700 V
Maximum Input Voltage (500x) (DC + AC peak)	±1750 V
Maximum Input Voltage (1000x) (DC + AC peak)	±3500 V
Absolute Maximum Rated Input Voltage (each side to ground)	2500 Vrms
Input Impedance (Differential)	54 MΩ // 1.2 pF
Input Impedance (each side to ground)	27 MΩ // 2.3 pF
Output Voltage Swing	±8 V (driving 1 MΩ oscilloscope input)
Offset (typical)	±5 mV
Noise (typical)	2 mVrms
Source Impedance	50 Ω
Power Supply	9 V power adapter (included)

Mechanical Characteristics	
Weight (probe only)	280 g
Dimensions	240 x 80 x 30 mm
BNC Cable Length	100 cm
Input Leads Length	55 cm each

Environmental Characteristics	
Operating Temp/Humidity	0°C to 50°C / 10% to 85% RH
Storage Temp/Humidity	-30°C to 70°C / 10% to 90% RH
Pollution Degree	Pollution Degree 2

Safety Specifications	
IEC 61010-031:2015 CAT II	

* Accuracy based on DMM with 10 MΩ input impedance


Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com

Technical data subject to change.

© Cal Test Electronics 2017.



Performance Data Plots

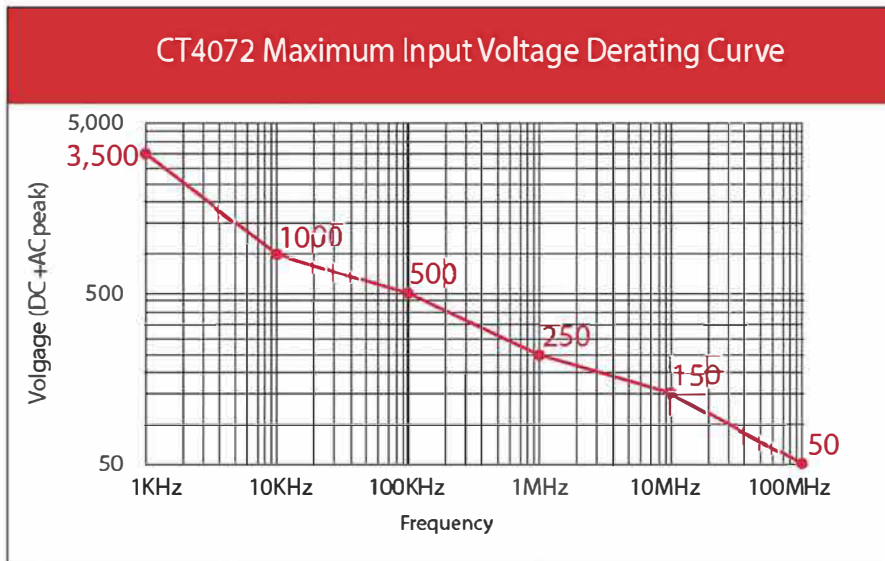

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

TestEquipmentDepot.com

Technical data subject to change.

© Cal Test Electronics 2017.

