

ALLIGATOR CLIP, PHOTOVOLTAIC CT4501



Features:

- IEC 61010-031 safety rated
- Higher rated working voltage
- Reinforced insulation
- Compatible with both sheathed and standard 4 mm banana plugs
- CE & UKCA Compliant
- RoHS 2 Compliant

Description:

The CT4501 alligator clips feature a high working voltage rating of 1500 V CAT III* making them ideal when working with photovoltaic panels as well as other applications. The 4 mm jack accepts both sheathed and standard plugs, making these clips easy to connect to measuring devices. Their 30 mm jaw opening provides flexibility and ensures a secure connection. With a higher voltage rating, the CT4501 will provide convenience and the safety required when working with solar panels.


*Must be used in conjunction with similarly rated products

Available individually in 8 colors or as a black & red pair. See Order Information on page 2.

Specifications:

- Voltage Rating: 1500 V CAT III / 1000 V CAT IV
- Max Current: 20 A
- Body: Polybutylene Terephthalate
- Contact: Steel, Ni Plated
- Jaw Opening: 30 mm
- Working Temperature: -20°C to +80°C
- RoHS 2 Compliant

Outline Drawing: (not to scale)

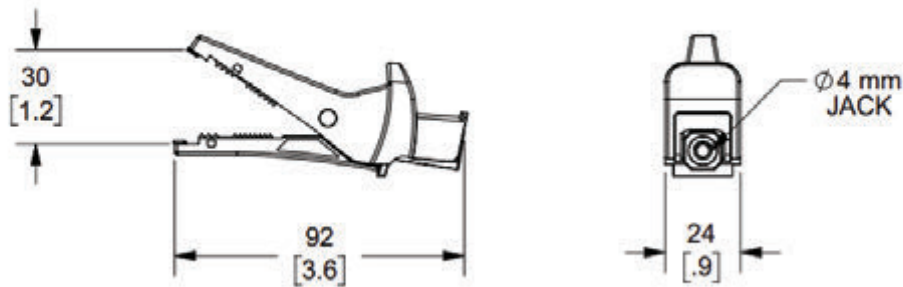

Ordering Information:

CT4501

Alligator Clip, Photovoltaic, Individual

#Colors Available:

-0 Black, -1 Brown, -2 Red, -4 Yellow, -5 Green, -6 Blue, -8 Grey, -9 White

Order Example:

CT4501-0 (Individual black alligator clip)

CT4502

Alligator Clip, Photovoltaic, Pair

Black and Red

Copyright © Cal Test Electronics, Inc. All rights reserved. Information in this publication supersedes that in all previously published material. Trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

