

HDE LOOKOUT APP

Features:

- Remotely turn detectors on/off
- Select system voltage
- Remotely self-test connected detectors
- Monitor battery level
- Rename connected detectors
- Real time notifications when voltage is detected









The App utilizes the charger to communicate with the network of LOOKOUT voltage detectors - Charger must be powered






LOOKOUT™ Voltage Detection Network


Operator Unit

Shown with optional

equipment mount









LOOKOUT 6-Pack Kit



PART NO.	DESCRIPTION					
LO-01	LOOKOUT Voltage Detector					
LO-OP	LOOKOUT Operator Unit - Relays network alerts to the operator (Does NOT detect voltage)					
LOC-01	LOOKOUT Charger, 12V					
LO-EM	Equipment Mount					
LO-CL	Claw Tool for Detector Installation					
LO-CB	Safety Cone Mounting Bracket					
LO-HB	Fence Hanger Bracket					
LO-XF1	Charger Adapter, 120V					
LO-XF2	Charger Adapter, 220V					
LO-BGS	Carrying Bag					

	TECHNICAL SPECIFICATIONS					
Voltage Range	System voltage from 4kVAC to 500kVAC - Do no use below 2400VAC line-to-ground					
Operating Frequency	50/60Hz					
Typical Warning Distance*	~ 3 ft (91cm) from a 4kVAC conductor - For more details refer to the instruction manual					
Communication Range	Up to 100 ft (30m) between detectors					
Weight	1 lb. (0.45kg) single detector					
Dimensions	6.75" Ø x 1.55" H (17.14cm x 3.94cm)					
Enclosure Rating	IP67					

*Based on OSHA standard 1910.269 for minimum approach distances for qualified electrical workers

PART NO.	DESCRIPTION	INCLUDES							
	DESCRIPTION	LO-01	LOC-01	LO-OP	LO-EM	LO-CL	LO-CB	LO-HB	LO-BGS
LO-06	LOOKOUT 6-Pack Kit	6	1	-	-	-	-	-	1
LO-P6E	LOOKOUT 6-Pack Kit, Equipment	5	1	1	4	1	-	-	1
LO-06C	LOOKOUT 6-Pack Kit, Cones	6	1	-	-	-	6	-	1
LO-06H	LOOKOUT 6-Pack Kit, Hangers	6	1	-	-	-	-	6	1

Additional kits are available, contact HDE

U.S. patents pending. Printed in U.S.A. © HD Electric Company 2018



LOOKOUT™ **Voltage Detection Network**






Depot Melrose, MA 02176 Phone 781-665-1400 Toll Free 1-800-517-8431





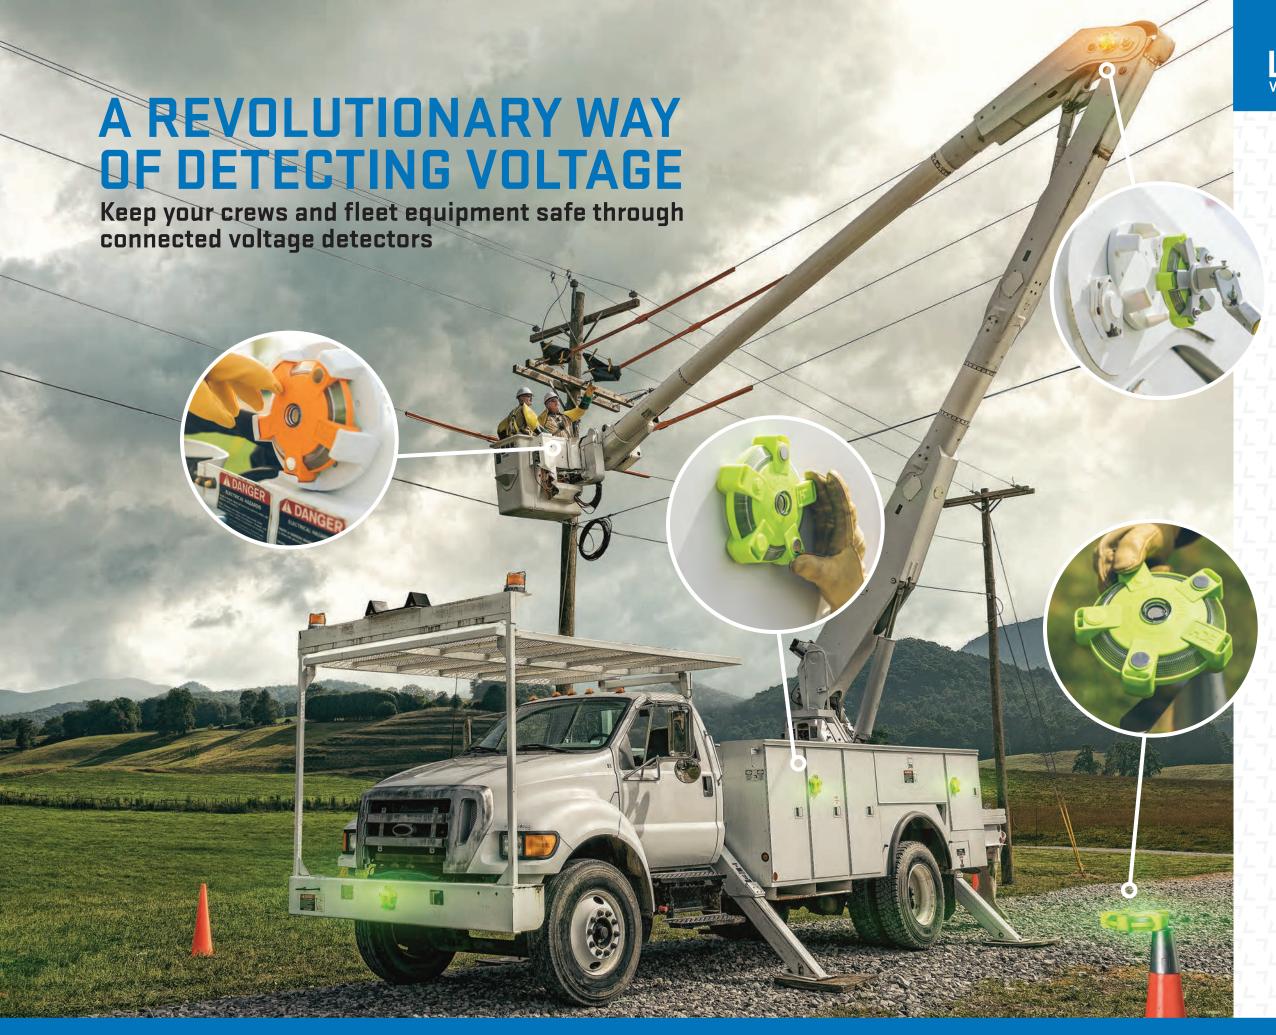







Visual and audible warning indicates the location of energized fields in a green-yellow-red sequence



Detectors communicate with each other within a mesh network



Remotely control detectors through the LOOKOUT mobile app



Warns of high voltage electric fields using WAVi® technology - Work Area Voltage Indication



Battery life of up to 500 hours in Monitor mode and up to 8 hours in Alert mode



Durable water resistant housing