Power Electronics Trainer

PB-600



Description:

The Global Specialties Power Electronics Trainer, model PB-600, is a powerful and versatile educational tool. It's designed with a wide choice of built-in circuit accessories providing user convenience and allow easy construction of numerous power electronics circuits. Designers, Engineers, Technicians, Students, and Hobbyists will find this trainer to be a useful experimenting and prototyping tool.

The PB-600 contains all the necessary controls and devices required to construct power electronics circuits. From a firing angle control to semiconductor devices, this unit provides the user with several options to choose from when connecting a circuit.

The trainer includes (PDF download) an 85-page Student Lab Manual which is essentially a mini Power Electronics Course. Reading the lessons and completing the select circuits, will provide the user with a practical and solid understanding of power electronics.

The PB-2 board is removable for easy placement in the breadboarding area. This feature would be ideal for multi-student use in a classroom environment.

The PB-600 is designed to withstand the toughest treatment. It is constructed with the highest quality components for many years of reliable service.

Applications:

Device Characteristics
Commutation Circuit
Resistor Triggering Circuit
Ramp and Pedestal Triggering
Relaxation Oscillator
Voltage Commutated Chopper

Inverter Circuit
Half Wave Controlled Rectifier
Full-Wave Controlled Rectifier
Buck Converter
Boost Converter
Buck-Boost Converter

Features:

- Power Output:
 - 8 Fixed DC output options
 - 4 Fixed AC output options
- Removable circuit breadboard with 1,680 contact points
- Variety of semiconductor devices to choose from
- PWM and frequency controls
- Firing angle control, variable 0°-180°
- Pulse transformer 1:1 and 1:1:1
- Duty cycle control 0 to 100%
- Potentiometer 4.7 KΩ and 1 MΩ
- Power Electronics courseware available (Model PB-600 Student Lab Manual--PDF Download)
- Input power source, AC line switchable between:
 - 110 120V @ 60 Hz
 - 220 240 V @ 50 Hz
- 1-Year Warranty

Specifications and appearance subject to change without notice 451-091-001_rA




Front Panel Breadboard Semiconductor Resistive Load Area **Devices** Selector POWER ELECTRONICS TRAINER PB-600 Power Supply Fixed DC Power Supply Fixed AC SCR's Firing Angle Control Single Pole Double Throw (SPDT) Diodes, Resistors, Capacitors, and Inductors $4.7K\Omega$ & $1M\Omega$ **Potentiometers** Power Switch (ON/OFF) Frequency **PWM** Duty Cycle Pulse Control Control Control **Transformers**

Side Panel



Accessories

Many additional classroom parts are available (examples below):

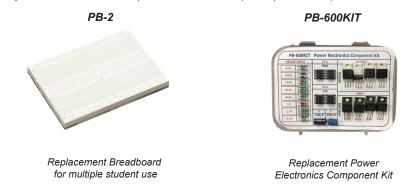

Specifications and appearance subject to change without notice 451-091-001_rA




Included with PB-600



Specifications:

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient range of 20 °C ± 5 °C.

Model	PB-600
Power	3-wire AC Input with 115 V / 230 V (Selectable)
DC Power Supply	± 5V at 100mA, ± 12V at 150mA, ± 15V at 50mA & ± 35V at 50mA
AC Power Supply	18V - 0V - 18V at 50mA, & 15V - 0V - 15V at 50mA
Breadboard	1280 Tie Points and 4 Bus Strips with 100 Tie Points each, Totaling 1680 Tie Points. Size 112mm x 170mm (Approx.)
Triggering Circuit	5 Gate Signal Output, Frequency Range: 40Hz to 900Hz Variable, Amplitude: 12V PWM control of G1, G2, G3 and G4. Duty Cycle Control of "Gate" Signal is 0 to 100%
Single Phase Rectifier	Firing Angle Control 0°-180° Variable
Pulse Amplifier	Firing Circuit Four Gate Signal Output with Isolation Transformer
SCR Assembly	2P4M (4 pieces) 600V, 2A
Power Devices	IGBT- G4BC20S; MOSFET- IRF540; UJT- 2N2646, DIAC- DB3; TRIAC- BT136; PUT- 2N6027; SCR- TYN612/02
Circuit Components	Capacitor: 0.01uF, 0.047uF, 0.1uF, 0.33uF, 1uF/63V (4 pieces), 2.2uF/50V Diode: IN4007 (8 pieces), Zener Diode 9V Inductor: 10mH, 68mH (2 pieces) Resistor: 22Ω/5W, 100Ω/2W, 220Ω/2W, 10ΚΩ (3 pieces), 22ΚΩ, 33ΚΩ, 47ΚΩ,
Potentiometer	4.7KΩ (2 pieces), 1MΩ
Load Resistance	120Ω, 270Ω, 1ΚΩ, 2.2ΚΩ, (each 5W)
Rocker Switch	Single Pole Double Throw (SPDT)
Pulse Transformer	1:1 (2 pieces), 1:1:1
Dimensions	16.3" x 4.7" x 12.3" (W x H x D)
Weight	9.25 lbs
Included Accessories	PB-2 Breadboard, PB-600KIT Power Electronics Component Kit , WK-3 Jumper Wire Kit (70 pc), Patch Cords (36 pc), Power Cord
Warranty	1 Year



PB-600 Student Lab Manual (PDF Download)

 $C \in$

