


Part No.

QTHA-TEVR-HC-SS

n-line fine adjust vernier piston - male Quick-test x female Quick-test, Stainless Steel

Connect one end to a Quick-test hose and the other to the process connection then turn the knob to control the pressure

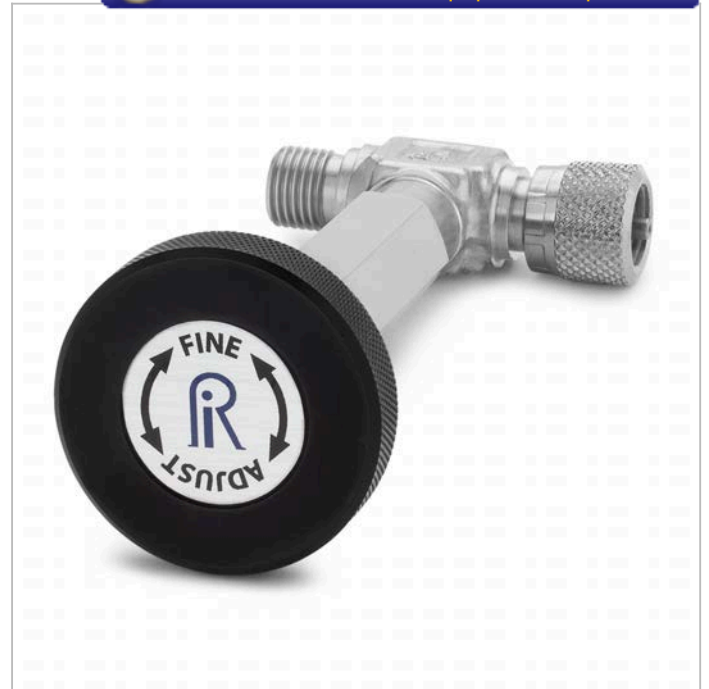

QTHA-TEVR-HC-SS

Specs/Attributes

| | |
|---------------------------|---|
| Country of origin | USA |
| Has Block Valve | No |
| Has Vent Valve | No |
| Materials | Stainless Steel |
| Max Operating Temperature | 225 °F / 105 °C |
| Max Pressure | 5000 PSI / 350 bar / 35 MPa |
| Min Operating Temperature | 0 °F / -18 °C |
| Seal Materials | Buna-N, Teflon |
| Dimensions | H: 1.85 in (4.7 cm) x W: 3.5 in (8.89 cm) |