

# VIAVI RF Adapters



**VIAVI**  
VIAVI Solutions



**Test Equipment  
Depot**  
1-800-517-8431

99 Washington Street  
Melrose, MA 02176  
Phone 781-665-1400  
Toll Free 1-800-517-8431



Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)

VIAVI offers commonly-used RF and coaxial adapters for 50 Ohm applications that connect 2 different types of RF interfaces, from N to N, DIN, SMA, BNC, QMA, 4.1/9.5 Mini DIN and 4.3-10, and from 7/16 DIN to 7/16 DIN.





# Table of Contents

## **Adapter Types..... 4-5**

Selection Table..... 4-5

## **Specifications .....5-24**

N to N Adapters ..... 5-8

N to 7/16 DIN Adapters ..... 9-14

N to SMA Adapter..... 15

N to BNC Adapter ..... 16

N to QMA Adapters..... 17-18

N to 4.1/9.5 Mini DIN Adapters..... 19-20

N to 4.3-10 Adapters..... 21-22

7/16 DIN to 7/16 DIN Adapters ..... 23-24

# Adapter Types

## Selection Table

Adapter Types	Catalog Number	Connectors	Frequency Range
N to N	G700050575	N(f) to N(f)	DC to 18 GHz
	G700050580	N(m) to N(m)	DC to 11 GHz
	G710050575*	N(f) to N(f)	DC to 4 GHz
N to 7/16 DIN	G700050571	N(m) to DIN(f)	DC to 75 GHz
	G700050576	N(m) to DIN(m)	DC to 75 GHz
	G700050577	N(f) to DIN(f)	DC to 75 GHz
	G700050578	N(f) to DIN(m)	DC to 75 GHz
	G710050577*	N(f) to DIN(f)	DC to 4 GHz
	G710050578*	N(f) to DIN(m)	DC to 4 GHz
N to SMA	G700050573	N(m) to SMA(f)	DC to 18 GHz


\* Not available in EU

Adapter Types	Catalog Number	Connectors	Frequency Range
N to BNC	G700050574	N(m) to BNC(f)	DC to 4 GHz
N to QMA	G700050581	N(m) to QMA(f)	DC to 6 GHz
	G700050582	N(m) to QMA(m)	DC to 6 GHz
N to 4.1/9.5 Mini DIN	G700050583	N(m) to 4.1/9.5 Mini DIN(f)	DC to 6 GHz
	G700050584	N(m) to 4.1/9.5 Mini DIN(m)	DC to 6 GHz
N to 4.3-10	G700050585	N(m) to 4.3-10(f)	DC to 6 GHz
	G700050586	N(m) to 4.3-10(m)	DC to 6 GHz
7/16 DIN to 7/16 DIN	G700050572	DIN(m) to DIN(m)	DC to 7.5 GHz
	G700050579	DIN(f) to DIN(f)	DC to 7.5 GHz

# Specifications

## N to N Adapters

G700050575

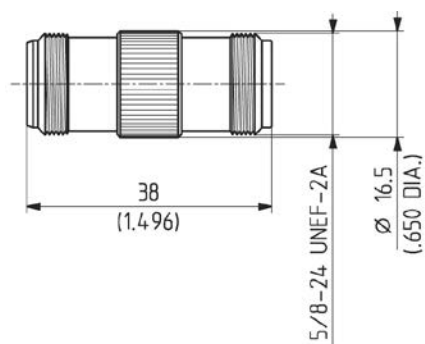

(mm)

### Mechanical Data

Connectors	N jack (female)	N jack (female)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	--	--

### Interface Surface Plating

Center Contact:	Sucopro Plating	Sucopro Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	--	--


### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------

### Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
Return Loss	≥ 30 dB (DC to 2 GHz) ≥ 15 dB (2 to 8 GHz) ≥ 10 dB (8 to 12.4 GHz)
VSWR	≤ 1.07 (DC to 2 GHz) ≤ 1.43 (2 to 8 GHz) ≤ 1.92 (8 to 12.4 GHz)

**G700050580**

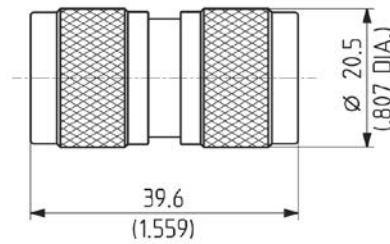


(mm)

Mechanical Data		
Connectors	N plug (male)	N plug (male)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PTFE	--
Coupling Nut:	Brass	Brass
Gasket:	Silicone Rubber	Silicone Rubber
Interface Surface Plating		
Center Contact:	Gold Plating	Gold Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	Sucoplate Plating
Environmental Data		
Temperature Range	-65 to 165°C	
Electrical Data		
Impedance	50 Ω	
Frequency	DC to 11 GHz	
Return Loss	--	
VSWR	≤ 1.06 + 0.04 · f(GHz) (DC to 9 GHz) ≤ 1.40 (9 to 11 GHz)	

# Specifications

## N to N Adapters

G710050575



(mm)


### Mechanical Data

Connectors	N jack (female)	N jack (female)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	--	--
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	--	--
Interface Surface Plating		
Center Contact:	Gold Plating	Gold Plating
Outer Contact:	--	--
Body:	Nickel Alloy Plating	Nickel Alloy Plating
Coupling Nut:	--	--
Environmental Data		
Temperature Range	-40 to 125°C	
Electrical Data		
Impedance	50 $\Omega$	
Frequency	DC to 4 GHz	
Return Loss	--	
VSWR	$\leq 1.1$	



## N to 7/16 DIN Adapters

G700050571



(mm)


### Mechanical Data

Connectors	N plug (male)	7/16 DIN jack (female)
Interface Material		
Center Contact:	Brass	Bronze
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	Brass	--
Gasket:	Silicone Rubber	--
Interface Surface Plating		
Center Contact:	Gold Plating	Sliver Plating
Outer Contact:	Sucoplate Plating	Silver Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	--
Environmental Data		
Temperature Range	-65 to 165°C	
Electrical Data		
Impedance	50 Ω	
Frequency	DC to 75 GHz	
Return Loss	--	
VSWR	$\leq 1.03 + 0.02 \cdot f(\text{GHz})$	

# Specifications

## N to 7/16 DIN Adapters

G700050576




(mm)

### Mechanical Data

Connectors	N plug (male)	7/16 DIN plug (male)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PTFE	PFA/PTFE
Coupling Nut:	Brass	Brass
Gasket:	Silicone Rubber	Silicone Rubber
Interface Surface Plating		
Center Contact:	Gold Plating	Silver Plating
Outer Contact:	Sucoplate Plating	Silver Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	Sucoplate Plating
Environmental Data		
Temperature Range	-65 to 165°C	
Electrical Data		
Impedance	50 Ω	
Frequency	DC to 7.5 GHz	
Return Loss	--	
VSWR	$\leq 1.03 + 0.02 \cdot f(\text{GHz})$	

G700050577



(mm)

### Mechanical Data

Connectors	N jack (female)	7/16 DIN jack (female)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Bronze
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	--	--
Gasket:	--	--

### Interface Surface Plating

Center Contact:	Gold Plating	Silver Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	--	--

### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------


### Electrical Data

Impedance	50 Ω
Frequency	DC to 75 GHz
Return Loss	--
VSWR	$\leq 1.03 + 0.02 \cdot f(\text{GHz})$

# Specifications

## N to 7/16 DIN Adapters

G700050578



(mm)

### Mechanical Data

Connectors	N jack (female)	7/16 DIN plug (male)
------------	-----------------	----------------------

### Interface Material

Center Contact:	Copper Nickel Alloy	Brass
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	--	Brass
Gasket:	--	Silicone Rubber

### Interface Surface Plating

Center Contact:	Gold Plating	Silver Plating
Outer Contact:	Sucoplate Plating	Silver Plating
Body:	Sucoplate Plating	Silver Plating
Coupling Nut:	--	Sucoplate Plating


### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------

### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 75 GHz
Return Loss	--
VSWR	$\leq 1.03 + 0.02 \cdot f(\text{GHz})$

G710050577



(mm)

#### Mechanical Data

Connectors	7/16 DIN jack (female)	N jack (female)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	--	--
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	--	--

#### Interface Surface Plating

Center Contact:	Gold Plating	Gold Plating
Outer Contact:	--	--
Body:	Ternary Alloy	Ternary Alloy
Coupling Nut:	--	--

#### Environmental Data

Temperature Range	-55 to 135°C
-------------------	--------------


#### Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
Return Loss	--
VSWR	≤ 1.05

# Specifications

## N to 7/16 DIN Adapters

G710050578

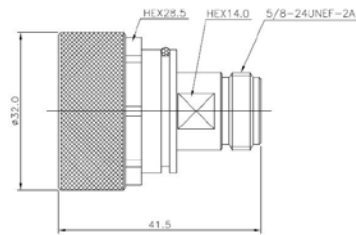


(mm)

### Mechanical Data

Connectors	7/16 DIN plug (male)	N jack (female)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	--	--
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	--	--
Interface Surface Plating		
Center Contact:	Gold Plating	Gold Plating
Outer Contact:	--	--
Body:	Ternary Alloy	Ternary Alloy
Coupling Nut:	--	--
Environmental Data		
Temperature Range	-55 to 135°C	
Electrical Data		
Impedance	50 Ω	
Frequency	DC to 4 GHz	
Return Loss	--	
VSWR	≤ 1.05	

## N to SMA Adapter

G700050573

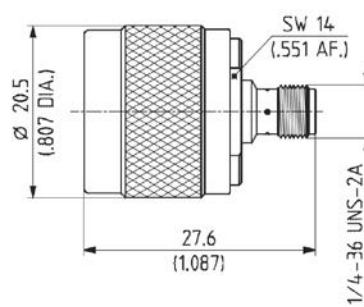

mm)

### Mechanical Data

Connectors	N plug (male)	SMA jack (female)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Outer Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Body:	Brass	Copper Beryllium Alloy
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	Brass	--
Gasket:	Silicone Rubber	--

### Interface Surface Plating

Center Contact:	Hard Au min. 1.3 $\mu\text{m}$	Gold Plating
Outer Contact:	Hard Au min. 0.8 $\mu\text{m}$	Gold Plating
Body:	Sucoplate min. 0.5 $\mu\text{m}$ over Ag min. 2 $\mu\text{m}$	Gold Plating
Coupling Nut:	Sucoplate min. 2 $\mu\text{m}$	--

### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------


### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 18 GHz
Return Loss	--
VSWR	$\leq 1.05 + 0.015 \cdot f(\text{GHz})$ (DC to 12.4 GHz)

# Specifications

## N to BNC Adapter

G700050574

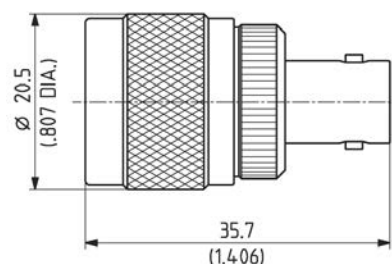

(mm)

### Mechanical Data

Connectors	N plug (male)	BNC jack (female)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	Brass	--
Gasket:	Silicone Rubber	--

### Interface Surface Plating

Center Contact:	Gold Plating	Gold Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	--

### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------


### Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
Return Loss	≥ 20 dB
VSWR	≤ 1.22



## N to QMA Adapters

G700050581

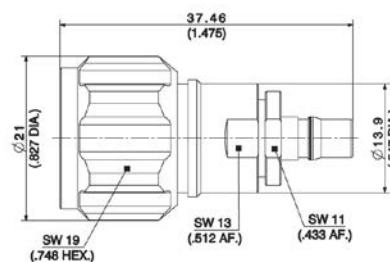

mm)

### Mechanical Data

Connectors	N plug (male)	QMA jack (female)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	Brass	--
Gasket:	--	--

### Interface Surface Plating

Center Contact:	Gold Plating	Sucopro Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	--

### Environmental Data

Temperature Range	-40 to 85°C
-------------------	-------------


### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 6 GHz
Return Loss	$\geq 34$ dB
VSWR	$\leq 1.04$

# Specifications

## N to QMA Adapters

G700050582

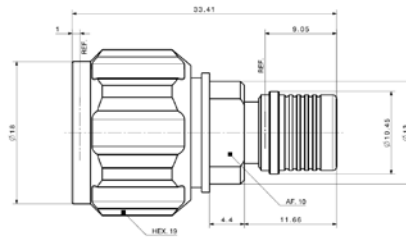


(mm)

### Mechanical Data

Connectors	N plug (male)	QMA plug (male)
Interface Material		
Center Contact:	Copper Beryllium Alloy	Copper Beryllium Alloy
Outer Contact:	Brass	Bronze
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	Brass	--
Gasket:	Silicone Rubber	--
Interface Surface Plating		
Center Contact:	Sucopro Plating	Sucopro Plating
Outer Contact:	Sucoplate Plating	Sucoplate Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	Sucoplate Plating	--
Environmental Data		
Temperature Range	-40 to 85°C	
Electrical Data		
Impedance	50 $\Omega$	
Frequency	DC to 6 GHz	
Return Loss	--	
VSWR	$\leq 1.04$	

## N to 4.1/9.5 Mini DIN Adapters

G700050583

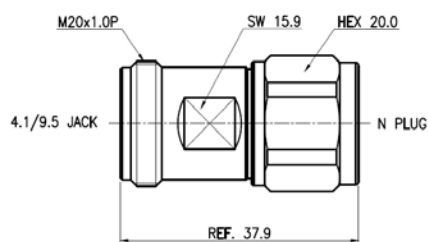

(mm)

### Mechanical Data

Connectors	4.1/9.5 jack (female)	N plug (male)
------------	-----------------------	---------------

### Interface Material

Center Contact:	Brass	Brass
Outer Contact:	--	--
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	Brass	Brass
Gasket:	--	--

### Interface Surface Plating

Center Contact:	Silver Plating	Silver Plating
Outer Contact:	--	--
Body:	Tri-alloy Plating	Tri-alloy Plating
Coupling Nut:	Tri-alloy Plating	Tri-alloy Plating

### Environmental Data

Temperature Range	-45 to 125°C
-------------------	--------------


### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 6 GHz
Return Loss	--
VSWR	$\leq 1.10$ at 3 GHz $\leq 1.15$ at 4 GHz $\leq 1.20$ at 6 GHz

# Specifications

## N to 4.1/9.5 Mini DIN Adapters

G700050584

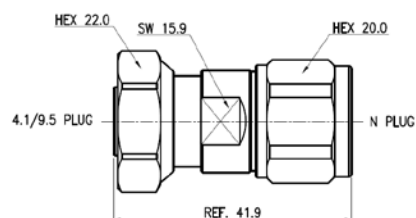



(mm)

### Mechanical Data

Connectors	4.1/9.5 plug (male)	N plug (male)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	--	--
Body:	Brass	Brass
Insulator:	PTFE	PTFE
Coupling Nut:	Brass	Brass
Gasket:	--	--
Interface Surface Plating		
Center Contact:	Silver Plating	Silver Plating
Outer Contact:	--	--
Body:	Tri-alloy Plating	Tri-alloy Plating
Coupling Nut:	Tri-alloy Plating	Tri-alloy Plating
Environmental Data		
Temperature Range	-45 to 125°C	
Electrical Data		
Impedance	50 Ω	
Frequency	DC to 6 GHz	
Return Loss	--	
VSWR	≤ 1.10 at 3 GHz ≤ 1.15 at 4 GHz ≤ 1.20 at 6 GHz	

## N to 4.3-10 Adapters

### Catalog Number

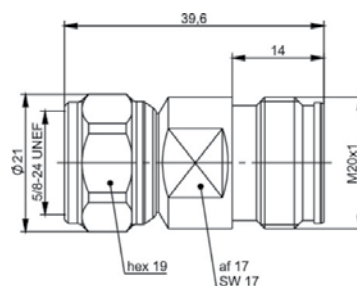

(mm)


### Mechanical Data

Connectors	N plug (male)	4.3-10 jack (female)
Interface Material		
Center Contact:	Copper Alloy	Copper Alloy
Outer Contact:	Copper Alloy	Copper Alloy
Body:	Copper Alloy	Copper Alloy
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	Silicone	Silicone
Interface Surface Plating		
Center Contact:	Silver Plating	Silver Plating
Outer Contact:	CuSnZn	CuSnZn
Body:	Nickel Plating	Nickel Plating
Coupling Nut:	--	--
Environmental Data		
Temperature Range	--	
Electrical Data		
Impedance	50 $\Omega$	
Frequency	DC to 6 GHz	
Return Loss	$\geq 40$ dB at 1 GHz $\geq 35$ dB at 4 GHz $\geq 28$ dB at 6 GHz	
VSWR	--	

# Specifications

## N to 4.3-10 Adapters

G700050586



(mm)

### Mechanical Data

Connectors	N plug (male)	4.3-10 plug (male)
Interface Material		
Center Contact:	Copper Alloy	Copper Alloy
Outer Contact:	Copper Alloy	Copper Alloy
Body:	Copper Alloy	Copper Alloy
Insulator:	PTFE	PTFE
Coupling Nut:	--	--
Gasket:	Silicone	Silicone

### Interface Surface Plating

Center Contact:	Silver Plating	Silver Plating
Outer Contact:	CuSnZn	CuSnZn
Body:	Nickel Plating	Nickel Plating
Coupling Nut:	--	--

### Environmental Data

Temperature Range


--

### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 6 GHz
Return Loss	$\geq 40$ dB at 1 GHz $\geq 35$ dB at 4 GHz $\geq 28$ dB at 6 GHz
VSWR	--

## 7/16 DIN to 7/16 DIN Adapters

G700050572



(mm)

### Mechanical Data

Connectors	7/16 DIN plug (male)	7/16 DIN plug (male)
Interface Material		
Center Contact:	Brass	Brass
Outer Contact:	Brass	Brass
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	Brass	Brass
Gasket:	Silicone Rubber	Silicone Rubber

### Interface Surface Plating

Center Contact:	Silver Plating	Silver Plating
Outer Contact:	Silver Plating	Silver Plating
Body:	Silver Plating	Silver Plating
Coupling Nut:	Sucoplate Plating	Sucoplate Plating

### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------


### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 7.5 GHz
Return Loss	$\geq 40$ dB (DC to 2 GHz) $\geq 36$ dB (2 to 4 GHz) $\geq 34$ dB (4 to 6 GHz)
VSWR	$\leq 1.02$ (DC to 2 GHz) $\leq 1.03$ (2 to 4 GHz) $\leq 1.04$ (4 to 6 GHz)

# Specifications

## 7/16 DIN to 7/16 DIN Adapters

G700050579

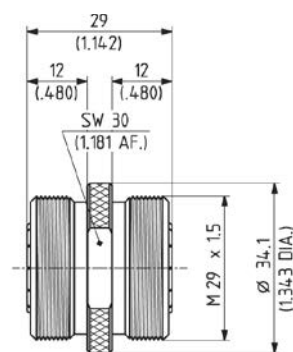

(mm)

### Mechanical Data

Connectors	7/16 DIN jack (female)	7/16 DIN jack (female)
Interface Material		
Center Contact:	Bronze	Bronze
Outer Contact:	Bronze	Bronze
Body:	Brass	Brass
Insulator:	PFA/PTFE	PFA/PTFE
Coupling Nut:	--	--
Gasket:	--	--

### Interface Surface Plating

Center Contact:	Silver Plating	Silver Plating
Outer Contact:	Silver Plating	Silver Plating
Body:	Sucoplate Plating	Sucoplate Plating
Coupling Nut:	--	--

### Environmental Data

Temperature Range	-65 to 165°C
-------------------	--------------

### Electrical Data

Impedance	50 Ω
Frequency	DC to 75 GHz
Return Loss	--
VSWR	≤ 1.03 (DC to 3 GHz) ≤ 1.03 + 0.01 · f(GHz) (3 to 75 GHz)







99 Washington Street  
Melrose, MA 02176  
Phone 781-665-1400  
Toll Free 1-800-517-8431

 Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)



VIIVI Solutions

© 2018 Viavi Solutions Inc.  
Product specifications and descriptions  
in this document are subject to change  
without notice.