

# AC/DC Current Probe

## TCP0150 Datasheet



The TCP0150 is a high performance and easy-to-use 150 A AC/DC current probe designed for use and direct connection to the TekVPI™ probe interface.

### Key performance specifications

- DC to 20 MHz bandwidth
- 150 A<sub>RMS</sub> maximum current capability
- 500 a peak pulse current capability
- High accuracy with typically less than 1% DC gain error
- Accurately measures current levels as low as 5 mA

### Key features

- Easy-to-Use and accurate AC/DC current measurements
- Connects directly to oscilloscopes with the TekVPI™ probe interface

- Low noise and DC drift
- Provides automatic units scaling and readout on the oscilloscope's display
- Remote GPIB/USB probe control through the oscilloscope
- Split-core probe head construction allows easy connection to conductors
- Easy to degauss and autozero
- Setup controls and probe status and diagnostic indicators are provided on both the probe hardware and through an Easy-to-Access scope UI display menu

### Applications

- Power supplies
- Semiconductor devices
- Power inverters/converters
- Electronic ballasts
- Industrial/consumer electronics
- Motor drives
- Transportation systems

This AC/DC current measurement probe provides 20 MHz of frequency bandwidth with selectable range control for 25 A and 150 A measurement ranges. It also provides low-current measurement capability and accuracy to current levels as low as 5 mA per division — important for achieving broad dynamic current range of high-level and low-level measurement signals.

## Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

### Warranted characteristics

<b>Bandwidth</b>	DC to $\geq 20$ MHz (-3 dB). Derate with frequency. See Figure 1. (Calculated from Rise Time $BW = .35/\text{Rise Time}$ )
<b>Rise time</b>	$\leq 17.5$ ns
<b>Max RMS current</b>	150 A
<b>Max peak pulse current</b>	500 A
<b>Minimum sensitivity</b>	5 mA (on oscilloscope's 1 mV/div setting) AC coupling (on oscilloscopes that support AC/DC coupling)
<b>Current ranges</b>	25 A and 150 A
<b>Max bare-wire voltage</b>	600 V <sub>RMS</sub> CAT I and II 300 V <sub>RMS</sub> CAT III

### Typical characteristics

<b>DC accuracy</b>	$\pm 1\%$ typical (3% warranted)
<b>Max amp-second product</b>	
25 A range	3,000 a $\mu$ s
150 A range	15,000 a $\mu$ s
<b>Insertion impedance</b>	0.03 $\Omega$ at 1 MHz 0.075 $\Omega$ at 5 MHz .125 at 10 MHz .3 at 20 MHz
<b>Signal delay</b>	$\approx 21$ ns
<b>Displayed RMS noise</b>	$\leq 500$ $\mu$ A <sub>RMS</sub> (probe only)

### Physical characteristics

<b>Cable length</b>	2 meters (79 in.)
<b>Probe head size</b>	
Length	26.8 cm (10.55 in.)
Width	4.1 cm (1.6 in.)
Height	15.6 cm (6.13 in.)
<b>Max conductor diameter</b>	21 mm x 25 mm (0.83 in. x 1.0 in.)

## Physical characteristics

Shipping weight	.7865 kg (1.734 lb.)
Power requirements	TCP0150 is powered directly by oscilloscopes with the TekVPI interface

## Environmental

### Temperature

Operating	0 °C to +50 °C
Nonoperating	-40 °C to +75 °C

### Humidity


Operating	5% to 95% RH (Relative humidity) at up to +30 °C 5% to 85% RH above 30 °C up to +50 °C, noncondensing
Nonoperating	5% to 95% RH (Relative humidity) at up to +30 °C 5% to 85% RH above 30 °C up to +75 °C, noncondensing

### Altitude

Operating	Up to 2,000 meters (6,560 feet)
Nonoperating	Up to 12,000 meters (40,000 feet)


## Recommended oscilloscopes

Oscilloscopes with the TekVPI probe interface.

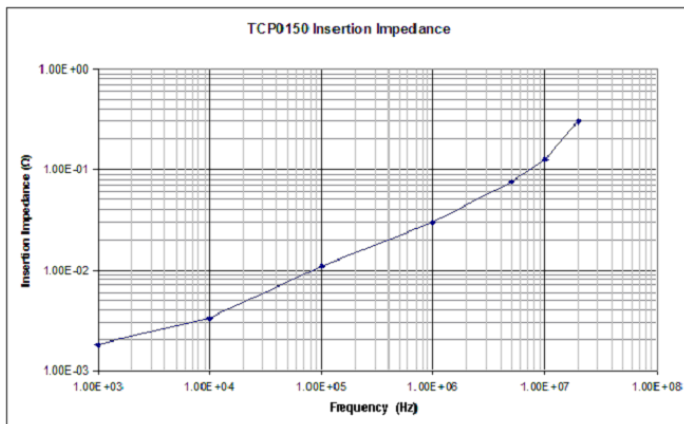


TCP0150 insertion impedance

Recommended oscilloscopes

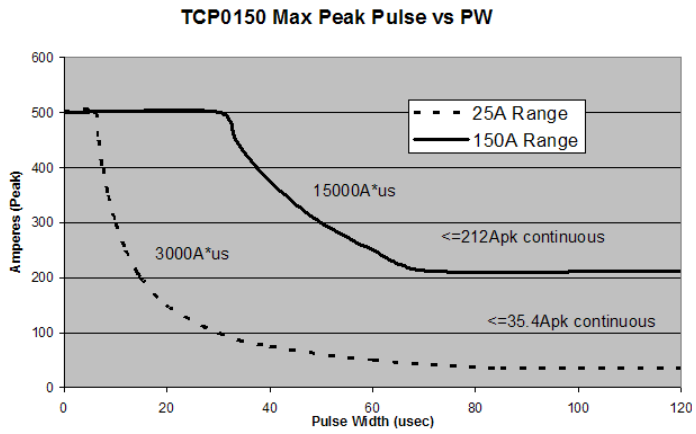

TCP0150 Max Peak Pulse versus PW

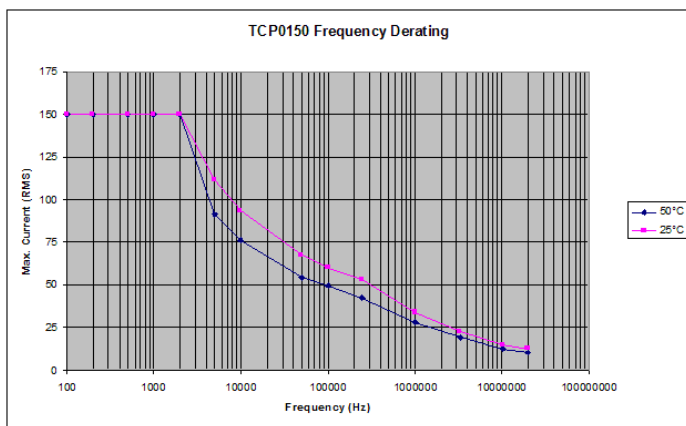

Do not apply currents greater than the max continuous current for more than 10 seconds to minimize heating effects.

## Ordering information

### Models

TCP0150 AC/DC current probe with TekVPI interface.

**Includes:** protective cover (016-1924-xx), and certificate of traceable calibration and data standard.

### Options

#### Language options

Opt. L0	English manual
Opt. L5	Japanese manual
Opt. L7	Simplified Chinese manual
Opt. L9	Korean manual

#### Service options

Opt. CA1	Single Calibration or Functional Verification
Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)
Opt. SILV600	Standard warranty extended to 5 years

### Recommended accessories

015-0601-50	Current loop, 1 turn, 50 $\Omega$ with BNC connector used for performance verification
067-1701-xx	TekVPI calibration fixture
067-1686-xx	Cal/Deskew fixture for DPO7000/70000 series



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176 - TestEquipmentDepot.com

**Tektronix**<sup>®</sup>

