



TEMPERATURE & HUMIDITY DATA LOGGER **TS-100 & TS-100-6PK**

The TS-100 is a small, portable, wireless smart tool that, when paired with a smart phone or tablet running the latest CPS Link app, can measure, record and email temperature and humidity conditions taken at residential or commercial job sites.

The TS-100 data logger is packed and sold as a single meter. Or, when readings from multiple locations at a jobsite are needed, the TS-100-6PK (6 TS-100 data loggers per clamshell pack) may be a better purchase option. Once deployed, each meter can be individually named to make tracking and analysis easy.

KEY FEATURES:

- On screen guidance to accurately measure and record test data:
 - Dry Bulb Temperature
 - Wet Bulb Temperature
 - Feels Like Temperature (compares temperature and humidity)
 - Dew Point
 - Relative Humidity
- E-mail professional reports for work completed, and where located
- Client Lists - Easy to enter and retain client contact information
- Select from 4 languages to work in (English, French, Spanish, German)
- Cloud back up of data

Ways to gather temperature and humidity data with the TS-100




Suspend from grille

Mount on Tri-Mini

Mount on EXP-64

Data Displayed In Starting Conditions Screen

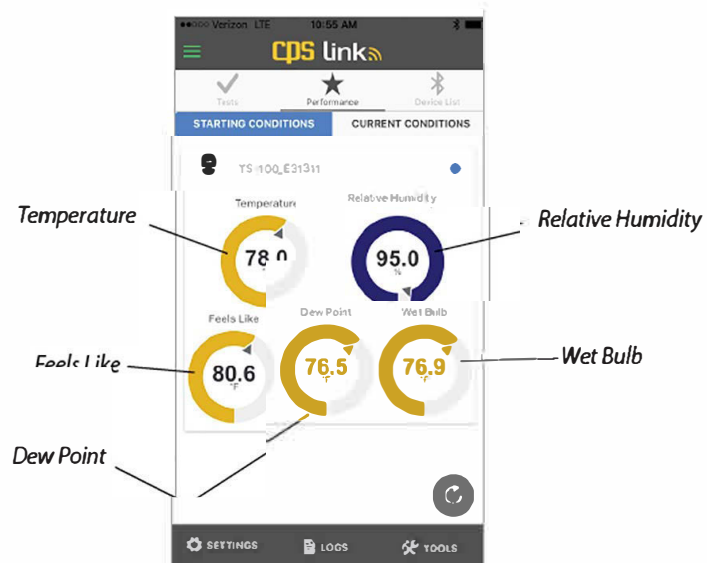


Connect with us on social media



TS-100 & TS-100-6PK

SPECIFICATIONS

| | |
|-------------------------------|---|
| Wireless Connection Range | ≤100 ft. (30.5m) |
| Operational temperature range | -4°F to +158°F (-20°C to +70°C) |
| Temperature accuracy | ±0.36°F, (±0.2°C) |
| Relative Humidity Range | 0-85% |
| Relative Humidity Accuracy | ±3% |
| Units of Measure | Fahrenheit, Celcius or Kelvin |
| Battery | 3V, CR 2450 Coin Cell Lithium Battery |
| Battery Life | >500 hours of activity (May vary in extreme conditions) |
| Warranty: | 1 Year |

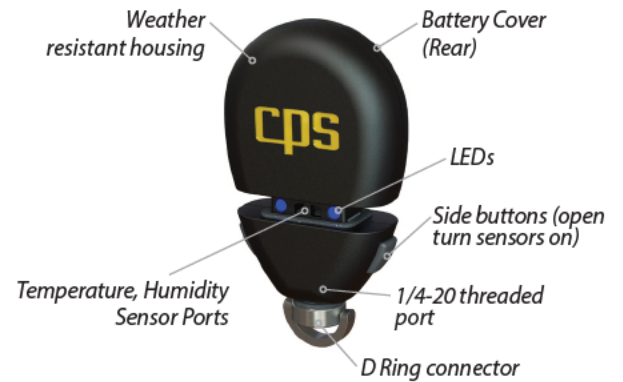

TS-100-6PK

TS-100

Clamshell Packaging (Included)

FREE CPS LINK™ APP DOWNLOAD



All Apple iPhones 4S or newer & iPads Generation 3 or newer operating on iOS 7.0 or newer.




All Bluetooth Smart compatible Android phones & tablets with operating system 4.3 (Jelly Bean) or newer.


EASY ON-SCREEN GUIDANCE TO RECEIVE, STORE & SEND DATA



Current Conditions Screen

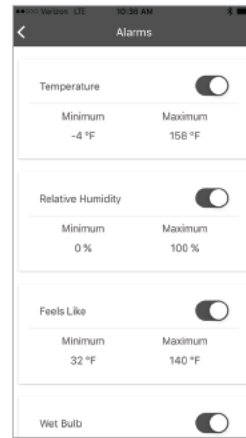

Alarms Screen

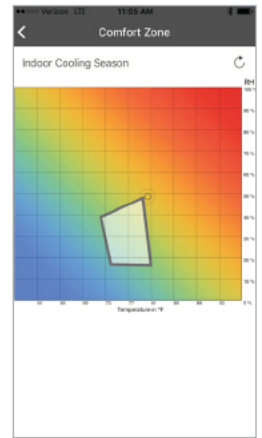

Comfort Zone Screen

| Reading Increments | Data Log Capacity | |
|--------------------|-------------------|--------|
| | Hours | Days |
| 5 Seconds | 28 | 1.2 |
| 30 Seconds | 167 | 7 |
| 1 Minute | 333 | 14 |
| 5 Minutes | 1,667 | 69 |
| 30 Minutes | 10,000 | 417 |
| Hourly | 20,000 | 833 |
| Daily | 480,000 | 20,000 |

If the meter is set to take a reading once every 5 minutes, the log will retain the last 69 days of data.

| PACKAGING | CLAMSHELL | | | | INTERMEDIATE CARTON | | | | MASTER CARTON | | | |
|------------|---------------------------|---------|-----------|----------------------------|----------------------------|---------|-----------|---------------------------------|-----------------------------|----------|-----------|-----------------------------------|
| | L x W x H | Weight | Meter Qty | Bar Code | L x W x H | Weight | Meter Qty | Bar Code | L x W x H | Weight | Meter Qty | Bar Code |
| TS-100 | 4.20 x 2.20 x 1.00 inches | 0.19 lb | 1 | 850470006084 TS-100 | 12.20 x 4.50 x 3.00 inches | 2.42 lb | 12 | 10850470006081 TS-100-C12 | 12.60 x 10.00 x 6.70 inches | 10.31 lb | 48 | 20850470006088 TS-100-MC48 |
| TS-100-6PK | 6.80 x 4.25 x 1.80 inches | 1.00 lb | 6 | 850470006107 TS-100-6PK | 11.50 x 4.60 x 7.50 inches | 6.31 lb | 36 | 10850470006104 TS-100-6PK-C6 | 11.70 x 9.50 x 15.50 inches | 25.62 lb | 144 | 20850470006101 TS-100-6PK-MC24 |