	MODELS 60®, 64® & 66™	UNDERGROUND WIRE CONNECTORS

FEATURES/BENEFITS:

- PRE-FILLED TWIST-ON WIRE CONNECTORS PROVIDE ONE-STEP PROCESS
- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE & CORROSION IN WET LOCATION APPLICATIONS
- LISTED TO UL 486G SEALED TWIST-ON WIRE CONNECTOR
- FOR USE IN DAMP/WET LOCATIONS OR DIRECT BURIAL/BELOW-GRADE APPLICATIONS

ELECTRICAL:

VOLTAGE:	MODEL 60®	600 V MAX*
	MODEL 64®	600 V MAX*
	MODEL 66®	600 V MAX*
		*SIGNS/FIXTURES 1000V

PHYSICAL:

HOUSING:	THERMOPLASTIC POLYESTER
INSERT:	STEEL
PLATING:	ZINC
TEMPERATURE:	105 C (221 F)
SEALANT	100% SILICONE

STANDARDS & SPECIFICATIONS:

UL 486C
UL 486G SEALED TWIST-ON WIRE CONNECTOR
UL 94V-2 FLAME RATING
CSA- C22.2 NO. 188
CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL
RoHS COMPLIANT

WIRE RANGE:

- Solid and/or stranded wire combinations unless stated otherwise
- Consult factory for numerous other combinations not listed

MODEL 60®	MODEL 64®	MODEL 66™
STRIP LENGTH: 1/2" (12,7mm)	STRIP LENGTH: 5/8" (15,9mm)	STRIP LENGTH: 1" (25,4mm)
1 to 2 #10	1 to 3 #10	1 to 2 #6
1 to 3 #12	1 to 3 #12	2 to 3 #8
1 to 4 #14	2 to 5 #14	2 to 5 #10
2 #16	2 to 4 #16	3 to 6 #12
2 #18	2 to 4 #18 solid	1 #6 w/ 1 to 2 #8
1 #10 w/ 2 #12	3 or 4 #20 solid	2 #6 w/ 1 #10 or 1 #12 or 1 #14
1 #20 w/ 1 #18	3 or 4 #22 solid	2 #8 w/ 1 or 2 #10

DIMENSIONS:

Length = 1.68 in (42,7 mm)
Diameter = 0.65 in (16,5 mm)
Wingspan = 0.85 in (21,7 mm)

MODEL 60® IMAGE NOT AVAILABLE



MODEL 64®

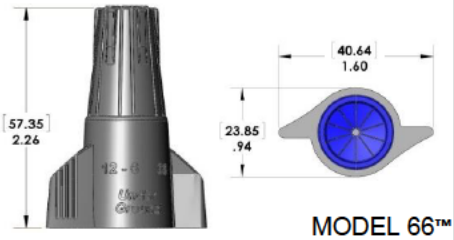

MODEL 66™

ORDERING INFO:

CATALOG #	MODEL	COLOR	PACKAGE TYPE:	WEIGHT LBS (KG):
30-1260	60®	Gray/Gray	Box of 100	14.4 (6.5)
30-1264	64®	Gray/Dk. Blue	Box of 50	34.1 (15.5)
30-1066	66™	Gray/Dk. Blue	Box of 50	5.5 (2,5)

Revision: January 7, 2019