

ET130 DIGITAL LIGHT METER AUTO-RANGING

Easy-to-use precision light meter measures illuminance levels in Foot Candles (FC) and Lux

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

TestEquipmentDepot.com




CE FC

KLEIN TOOLS 

For Professionals... Since 1857™

ET130 Digital Light Meter Auto-Ranging

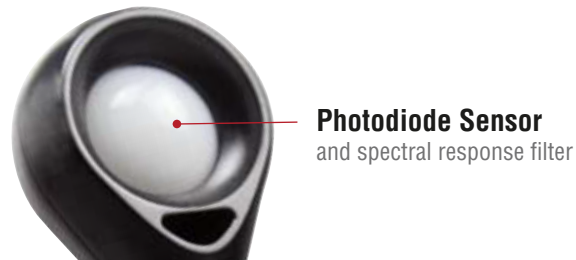

Photodiode Sensor
and spectral response filter



Digital LCD Screen
with backlit display and
40-segment bar graph

MAX/MIN Button
to capture
maximum and
minimum values

Backlight Button
for easy
viewing in
low light

Hold button
to hold the current
measurement on
the display

Included Accessories:
Carrying Pouch, 9V Battery



Power On/Off Button

RANGE/FC/LUX Button
easily toggles between
units and ranges

The **ET130** is an easy-to-use precision light meter with single-handed operation to monitor light levels in both Foot Candles (FC) and Lux.

- **Spectral Range:**
400 to 760 nm;
white light CIE standard
- **Range:**
0 to 4,000 FC;
0 to 40,000 Lux
(1 FC ≈ 10.76 Lux)
- **Resolution:**
0.01 FC / 0.1 Lux
- **Repeatability:**
± 3%
- **Sample Rate:**
2 times per second
- **Drop Protection:**
3.3 ft. (1 m)



Cat. No.	UPC# 0-92644+	Batteries	Height	Width	Depth	Weight (oz.)
ET130	69066-2	1 x 9V	8.1" (206 mm)	2.1" (54 mm)	1.4" (36 mm)	5.5 (156 g)

