
Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

TestEquipmentDepot.com

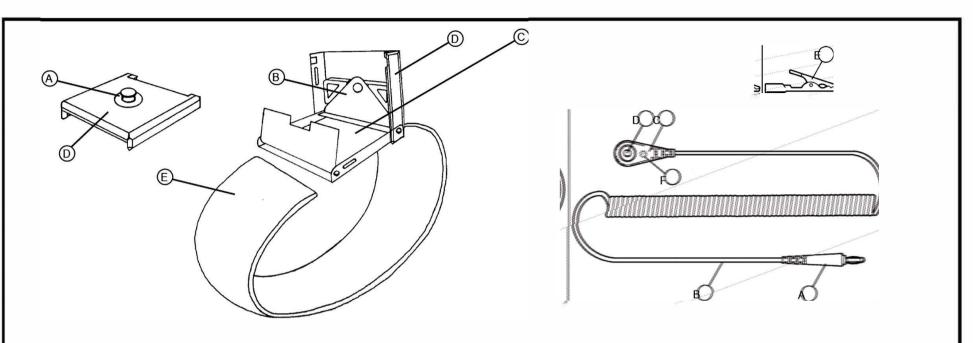

WRIST STRAP:

A. 4mm stud, to fit 4mm spring loaded medical snap socket.

DESCRIPTION

Band Only

Cord Only, 6'

Cord Only, 10'

- B. Easy to open plastic clasp secures elastic material in place, and allows the user to easily adjust the wrist band size. Maintains electrical continuity even when open.
- C. Non-allergenic stainless steel base plate, provides excellent skin contact, for superior grounding.

Band with 6' Coil Cord and Alligator Clip

D. Insulating cap, thermoplastic.

ITEM

09035

09037

09039 09040

E. Soft elastic band.

GROUND CORD:

- A. Barrel type banana plug. Fits industry standard banana jack .166 in. (4.22mm).
- B. Metallized, high flex tinsel, black jacket.
- C. One megohm, 1/4 watt, series resistor, molded within snap assembly, limits current for operator safety.
- D. Spring loaded 4mm snap socket.
- E. Alligator clip included in kit only. It is available separately as item 09700.
- F. Date coded with date of manufacture.

The color of the band material may vary.

WRIST STRAP KIT, ELASTIC, ADJUSTABLE, ECONOMY

DESCO	DRAWING NUMBER 09039	DATE: February 2010
	09039	2010