




Made in the  
United States of America

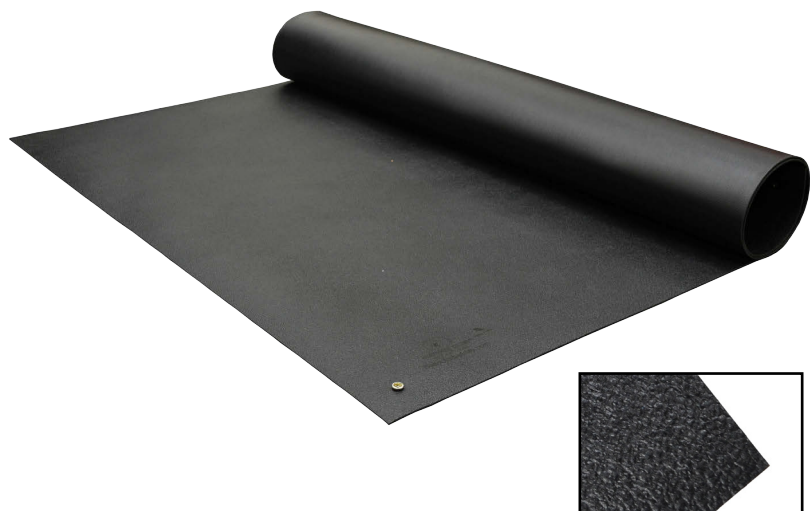

1964 Series Conductive Vinyl Flooring is designed to rapidly drain off static electricity meeting ANSI/ESD S20.20 tested per ANSI/ESD S4.1 & ESD TR53. Providing a static-safe conductive work area for a wide variety of applications where ESD properties are required, 1964 Series Vinyl Flooring is non-carbon loaded, non-sloughing and permanently conductive.

Properties	Typical Value
Material	Homogeneous Polymer Matrix of durable PVC
Color*	Black
Emboss Pattern	Pebble
Thickness	0.125" ± 0.013" (3.2 mm ± 0.3 mm)
Tensile	600 lb/in <sup>2</sup>
Elongation	150 %
Tear	100 lb/in
Hardness (top)	75 ± 5 Shore A
Resistance Surface to Ground (Rtg)	< 1 x 10 <sup>6</sup>
Service Temperature	-20 °F to +200 °F (-6.7 °C to +93 °C)

\*Color and texture may vary between lots and mills

**Floor Mat Kit Item Number**

Size	Black
48" x 72" (1.2 m x 1.8 m)	<a href="#">1964 4X6</a>

**Floor Mat Kit Includes:**

- 1 Floor Mat, size as specified
- 1 [3040](#) 15' (4.6 m) Ground Cord
- 2 Female 3/8" Snaps (Snaps installed on long side of mat)

**Floor Roll Item Number without Hardware**

Size	Black
36" x 60' (0.9 m x 18.3 m)	<a href="#">1964 3X60</a>

**RoHS, REACH and Conflict Minerals, Statement**  
 See the Desco Industries RoHS, REACH, and Conflict Minerals Statement:  
[DescoIndustries.com/RoHS3.aspx](http://DescoIndustries.com/RoHS3.aspx)

See the SCS Limited Warranty  
[Staticcontrol.Descoindustries.com/Limited-Warranty.aspx](http://Staticcontrol.Descoindustries.com/Limited-Warranty.aspx)

Unless otherwise noted, tolerance +/- 10%  
 Specifications and procedures subject to change without notice.

**1964 SERIES CONDUCTIVE VINYL FLOORING**



**DRAWING  
NUMBER**  
1964

**DATE**  
November  
2019