

RF EMF Strength Meter




High Frequency measurement for EMF

Monitor high frequency radiation in the 50MHz to 3.5GHz frequency range

Features:

- For electromagnetic field strength measurement including mobile phones, cell phones, base stations, and microwave leakage
- Non-directional (isotropic) measurement with three-channel (triaxial) measurement probe
- Max Hold and Average functions
- Manual store/recall up to 99 sets
- Level exceed audible alarm with user selectable threshold
- Complete with 9V battery and carrying case

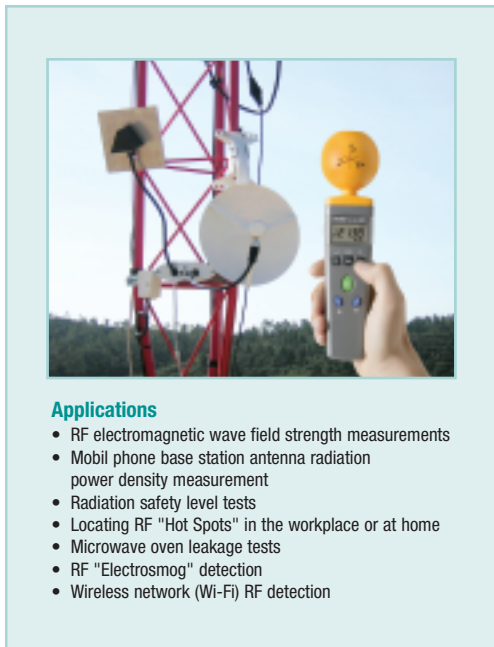

Applications

- RF electromagnetic wave field strength measurements
- Mobil phone base station antenna radiation power density measurement
- Radiation safety level tests
- Locating RF "Hot Spots" in the workplace or at home
- Microwave oven leakage tests
- RF "Electrosmog" detection
- Wireless network (Wi-Fi) RF detection



Specifications	
Sensor Type	Electric Field
Frequency Range	50MHz to 3.5GHz
Units of Measure	mV/m, V/m, μ A/m, mA/m, μ W/m ² , mW/m ² , W/m ² , μ W/cm ² , mW/cm ²
Measuring Ranges	20mV/m to 108.0V/m 53 μ A/m to 286.4mA/m 1 μ W/m ² to 30.93W/m ² 0 μ W/cm ² to 3.093mW/cm ²
Resolution	0.1mVm, 0.1 μ A/m, 0.001 μ W/m ² , 0.001 μ W/cm ²
Audible Alarm	Adjustable threshold with On/Off
Memory	Manual store/recall of 99 sets
Dimensions	9.3 x 2.4 x 2.4" (237 x 60 x 60mm)
Weight	7oz (200g)

Test Equipment Depot
1-800-517-8431

99 Washington Street
Melrose, MA 02176
Phone 781-665-1400
Toll Free 1-800-517-8431

▶ Visit us at www.TestEquipmentDepot.com

▶ Back to the Extech 480836 Product Page