




Made in the  
United States of America



Cost effective Heel Grounder Assembly has two-layer sole and a 24-inch conductive ribbon. Green-colored Hook and Loop Fastener provides visual assurance that Heel Grounders are being used. The elastic strap offers adjustability for most any size shoe.

Elastic for Adjustability

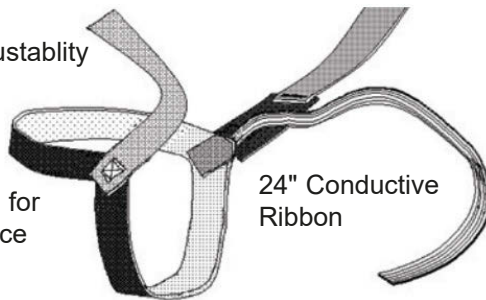

Re-positionable Sole for  
Extended Performance

24" Conductive  
Ribbon

2-layer Rubber Sole

| Specifications | Typical Value                | Test Method         |
|----------------|------------------------------|---------------------|
| Hook and Loop  | 3/4"                         |                     |
| Sole Interior  | Non-marking                  |                     |
| Sole Exterior  | < 1 x 10 <sup>6</sup> ohms   |                     |
| Total Grounder | < 1.2 x 10 <sup>6</sup> ohms | ESD-SP9.2, ESD TR53 |

| Item                      | Description                                     |
|---------------------------|---|
| <a href="#">HGC1M-ECG</a> | Economy Heel Grounder, Green, 1 Megohm Resistor |

Note: This product is not recommended for use on equipment with operating voltage exceeding 250 VAC.

CAUTION: The ESD Series is for electrostatic control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the ESD Series.

Unless otherwise noted, tolerance ± 10%

Specifications and procedures subject to change without notice.

**HGC1M-ECG HEEL GROUNDER ASSEMBLY GREEN-COLORED ECONOMY**



**DRAWING  
NUMBER**  
HGC1M-ECG

**DATE**  
September  
2015