

SBS-6500 Battery Tester

Assists with IEEE/NERC Compliance

The SBS-6500 is a multipurpose impedance and voltage tester. Readings of cells and intercell connectors are taken within seconds using the included pin probes (or optional clamp probes). The SBS-6500 can be programmed with site names, battery details and pass/warning/fail alarm set points for ohmic measurements (pass/fail for voltage). All data is retained in the meter's internal memory for easy on-site access. With a computer and the included software, the SBS-6500 generates custom graphical reports for historical trending and comparisons.

The SBS-6500 pairs with our SBS-2003 digital hydrometer to import specific gravity readings from the SBS-2003 into the SBS-6500. With this data merge, the SBS-6500 will store and generate reports with voltage, ohmic, temperature and gravity readings.

05.85

Benefits

- Quickly records and stores ohmic values, voltage and temperature of strings, cells and intercell connectors
- Instantly retests and recalls readings on-site
- Pin probe or clamp probe compatible
- User-friendly software and easy-to-navigate menu
- Convenient battery string and parameter set up via unit or software
- Organizes data by name and parameters for each battery string (up to 300 strings)
- Optional ability to download specific gravity readings wirelessly from SBS-2003 hydrometer
- Meets IEEE and NERC maintenance recommendations for stationary battery systems

Applications

- Telecom
- Utility
- · Oil and Gas
- Solar/Photovoltaic
- UPS
- · Emergency Lighting
- Railways

Functions

- Tests and records impedance, voltage and temperature readings of cells and intercell connectors
- On-screen pass/warning/fail indication during testing based on set parameters
- Stores and displays all historical data on handheld unit
- Communicates with computer and software via USB port
- Generates and displays battery string's test report and comparison data



Video available at www.sbsbattery.com/videos


Data Storage:

300 battery strings x 250 cells per string x 4 tests per year over a period of 25 years = 7.5 million records



Features

- Versatile: tests flooded lead acid, VRLA, NiCd, Li-ion and NiMH batteries and strings
- · Automatically measures and stores data within seconds
- Voltage testing range of 0-100 Vdc
- IEC 6101-1 CAT II 300V Safety Standard
- · Built-in NiMH battery with unit charging cord
- Large 3.8" LCD backlit display

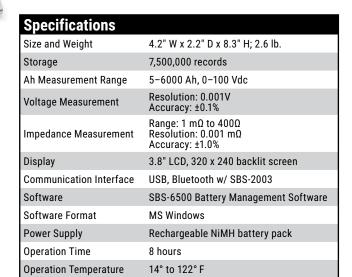




Hydrometer & Impedance Tester Data Merge

When combined with our SBS-2003 hydrometer, the SBS-6500 provides an all-in-one solution for your battery testing needs. The hydrometer downloads specific gravity data directly into the SBS-6500 for viewing or reporting. When a report is created with the SBS-6500 software, correlating voltage, temperature, impedance and specific gravity data readings will be together in a single report.



Battery Management Software (Included)

- Interface for loading string and alarm data to and from tester
- Exports into Excel and PDF formats for easy incorporation into custom reports
- Creates graphs and reports for battery analysis and trending

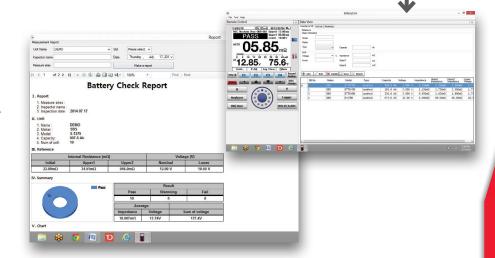

SBS-6500 Includes

- Main unit
- Pin probes
- Instruction manual
- · Quick start guide
- Software
- USB cable
- Unit charging cable
- NiMH battery
- Adjustable carrying strap
- · Carrying case







Ordering Information		
Part No.	Description	
SBS-6500	Battery tester	

Accessory Ordering Information		
Part No.	Description	
SBS-2003	Specific gravity tester	
6500-CLAMP-PROBE	Clamp probe leads	
6500-PIN-PROBE	Replacement pin probe leads	
6500-PIN	Replacement pin set for 6500-PIN-PROBES	
6500-BATT	Spare NiMH battery for SBS-6500	